

## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		G 1 2	2 Panels Similinox F12PPS *	2000	2210	Similinox F12PPS	Panoramic	Transparent	C2 - <u>PM</u>

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad



### Shaft V66 ()

ENVIRONMENT	VERSION	CLADDING	START	ROOF	ANCHORAGE
Outside	G + RAL *	See pages 3 and 4	Pit bottom	For Outside	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Esterno	Z + RAL *	Vedi Pag. 3 e 4	Fondo Fossa	Per esterno	

(\*) Both sides to be finished

(\*) Galvanized and RAL 9006

(\*) Zincata e RAL 9006

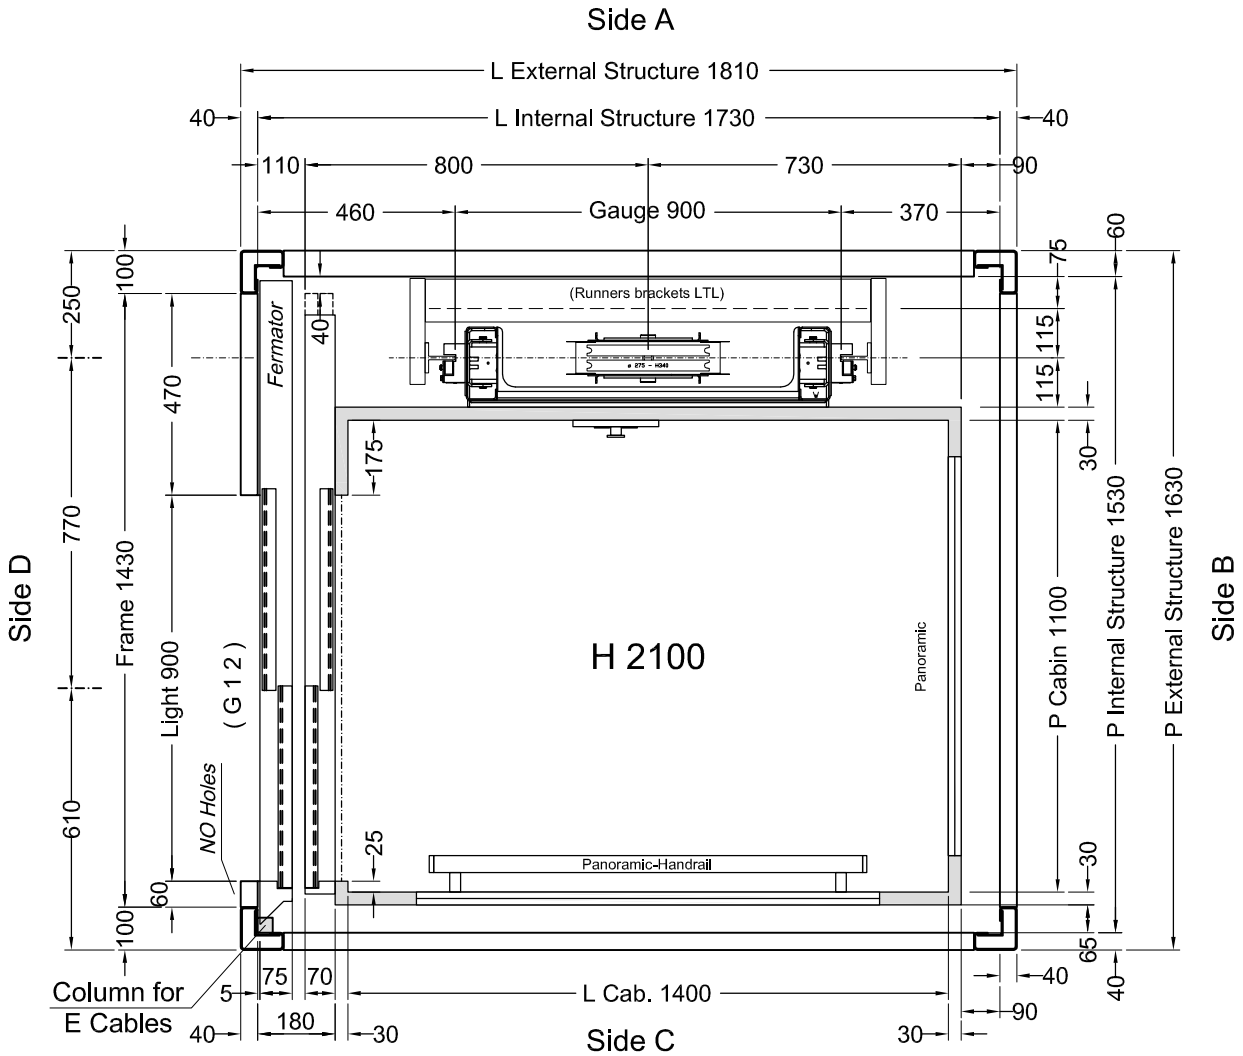

**Stops: 3 - Doors: 3**


Shaft in **Shaft V66 ()**

Customer own flooring: Dimensions **1430 (L) x 1100 (P)** thks **15 mm** Weight: **27 kg**

ORDER 89809 - Brisbane	DESCRIPTION	DESIGNER	DATE	Final Drawings	
				Model ELFO 2	SHEET 1/4
ORDER NUMBER <b>PS1406</b>	VERSIONS	CLIENT	D.Ogliastro	25/10/2013	SHEET DIMENS. <b>A3</b>
					pulsantiere a murare ai piani, pos. Centralina, corsa a 5595
			Final Drawings L. Del Bianco	1° STESURA 13/11/13	
			CAPACITY <b>350 kg</b>	AREA m <sup>2</sup> <b>1,54</b>	

**ACCESSORI:**

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Ritorno piano basso con tempo regolabile
- Dispositivo falsa testata
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Fotocellula di sicurezza V2
- Pulsantiera a murare al piani
- Carter Tetto cabina
- Manovra Automatica 2011 (Elfo Tipo 2)
- Pulsantiera cabina con pulsante apriporta

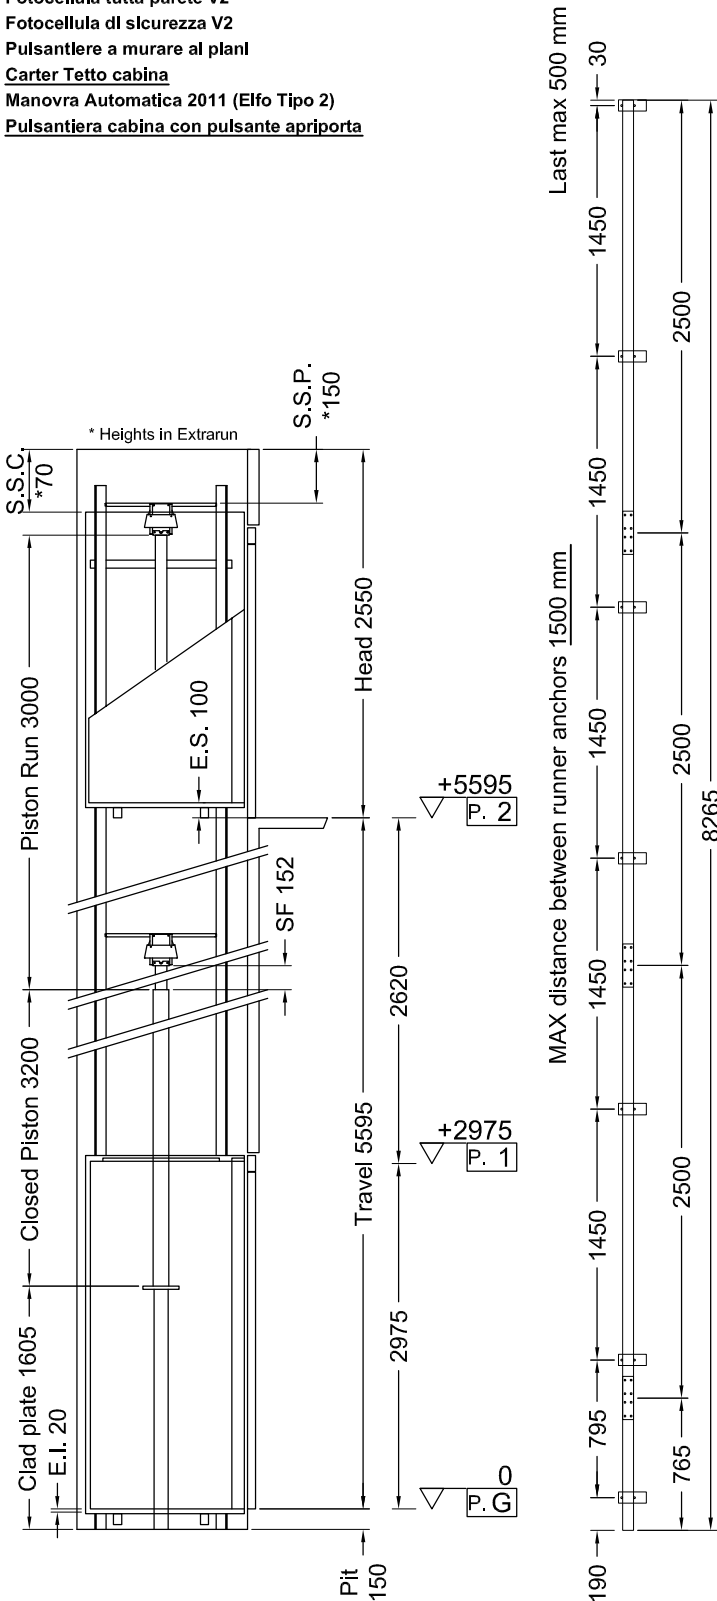

Indirect Installation	Speed 0,30 m/s	13/11/13 12.23 (V.2830)
-----------------------	----------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	14221	P	(N)	665
N	(N)	786	N	(N)	9602
F1	(N)	1795	F1	(N)	2992
F2	(N)	374	F2	(N)	623

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	35,29
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	21,63
SF.	Piston extraction (mm)	152	Overpressure limit (bar)	49,41
S.S.P.	Piston/head (mm)	150	Residual pressure (bar)	1,32
S.S.C.	Cabin/head (mm)	70		


HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	43	Runners	70x70x9
Motor (V)	MF230V	Brackets	(Nr) 7
Power (Kw)	2,9	Cables	Ø 11 mm 6-(1+9+9)
Corrente (A)	19	Cables length (mm) 2 x	11000
Piston	START SL (Ø) 80x5x3000	Min actual breaking load (N)	70700
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - FD 3/4"		
Tubing length (mm)	9000		
Min hydraulic oil (L)	52		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	LVT	LVT11	TUV DPD 010
Block Valve	START ELEVATOR	1/2" 0326	CA50.00526
Key Locks	FERMATOR	210/10/40	


MACHINERY LOCATION			
At floor	G	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	C		

CABIN		CABIN ACCESSORIES	
Panels	Lam.Plastico 2000 Satinato VG	Panoramic	Side B, C
Finishes	Inox Scotch Brite	Handrail	Inox S.B., Side C
Oper. panel	VERTICAL (Like finishes)	Outside covering	Side B, C, D, Roof
Floor	By Customer	Outside finishing	Simlinox F12PPS
Roof	SPOTS LED - Blanco A1		
Cabin Doors	* Side D: 2-Panels Automatic Sliding doors, Transparent Glass and Simlinox F12PPS		
(*) Both sides to be finished			

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Return to the lower floor after adjustable time
False head device
Telephone by Lift Shop
Full height infra-red curtain V2
Fotocellula di sicurezza V2
Floor Button Pad fixed to the Wall
Roof covering
Automatic Control 2011 (Elfo Type 2)
Door Open Button on C.O.P.



The information contained in this drawing are completed by masonry manual rev.4 | \* See masonry manual rev. 4


	ORDER 89809 - Brisbane	CLIENT Lift Shop	Final Drawings L. Del Bianco	1° STESURA 13/11/13
	ORDER NUMBER <b>PS1406</b>		Final Drawings	
			SCALE OUT OF SCALE	SHEET 2/4

### Shaft V66 ()

ENVIRONMENT	VERSION	CLADDING	START	ROOF	ANCHORAGE
Outside	G + RAL *	See pages 3 and 4	Pit bottom	For Outside	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Esterno	Z + RAL *	Vedi Pag. 3 e 4	Fondo Fossa	Per esterno	

(\*) Galvanized and RAL 9009006  
 (\*) Zincata e RAL 9009006

*Anchorage in height of 3 frames in head and every 3.5 m max*

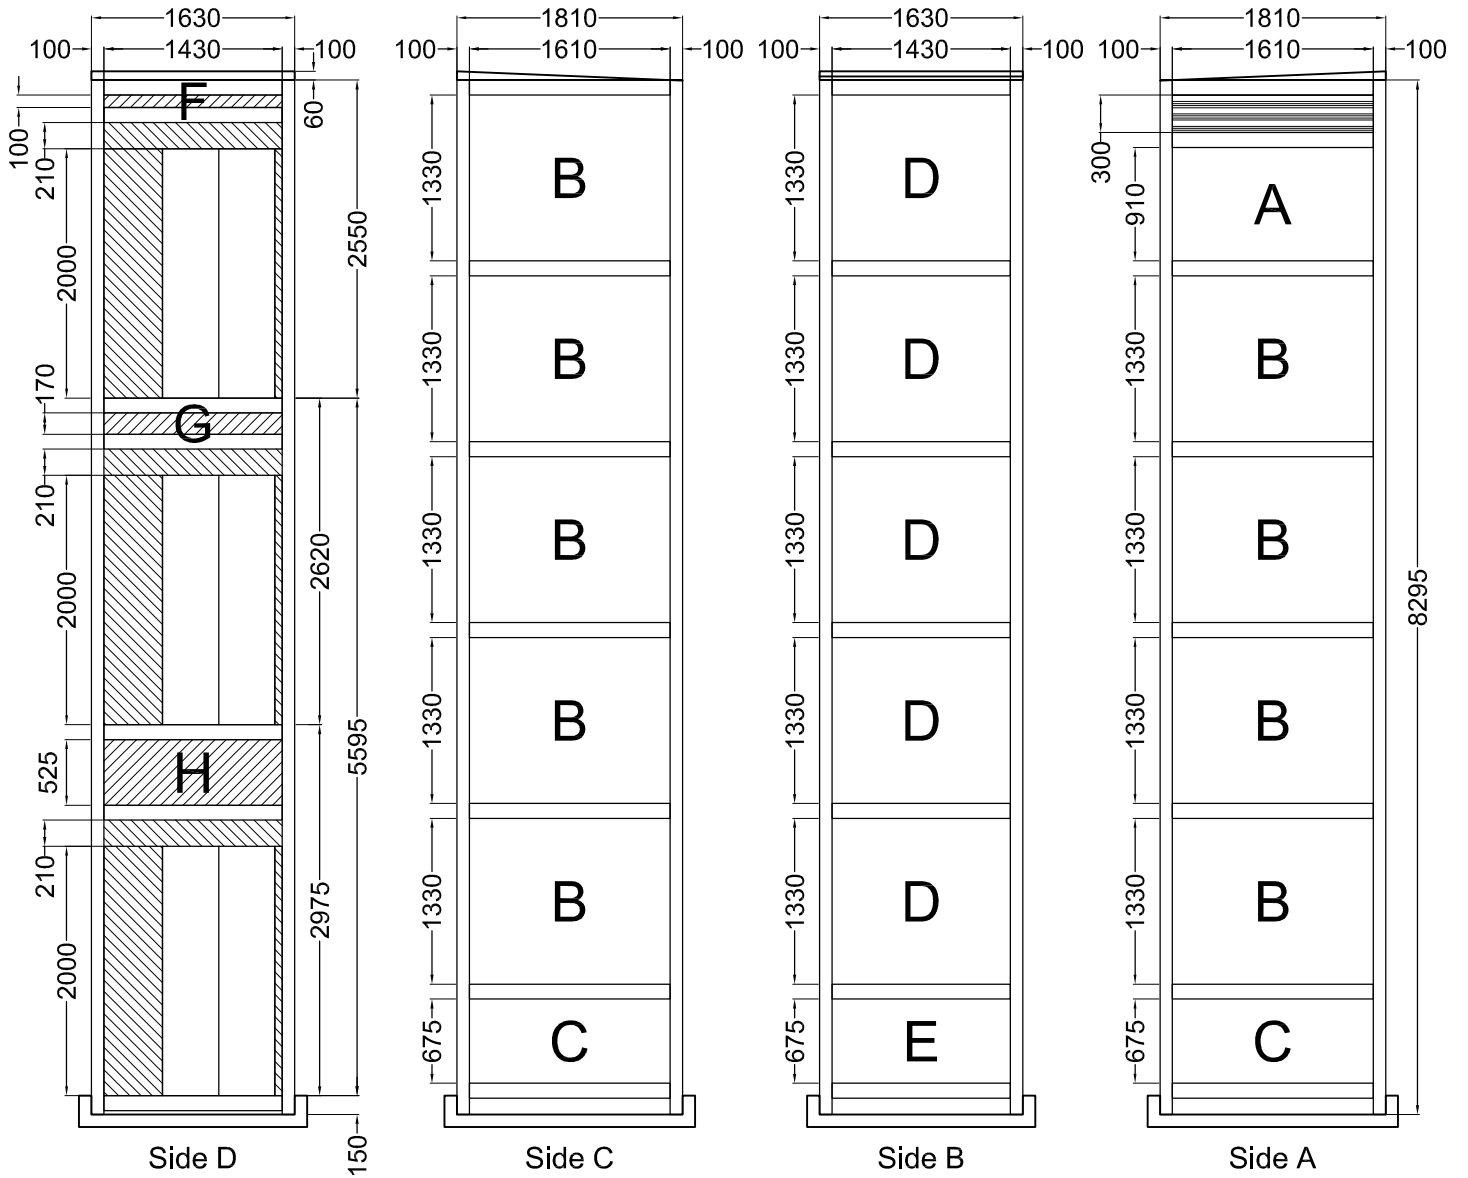

- Cladding Galvanized and RAL 9006
  - Frames Similinox F12PPS
- Ventilation Grid Galvanized and RAL 9006

# Cladding

Tag	Q.ty	Type	Thickness	Width	Height
A	1	Glass Transparent	10/11	1630	932
B	9	Glass Transparent	10/11	1630	1352
C	2	Glass Transparent	10/11	1630	697
D	5	Glass Transparent	8/9	1450	1352
E	1	Glass Transparent	8/9	1450	697
F	1	Sheet Cladding		1430	100
G	1	Sheet Cladding		1430	170
H	1	Sheet Cladding		1430	525

