


## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		1 2 3	Galvanized and RAL 9007 *	2000	2100	Galvanized and RAL 9007*	Absent		C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(\* ) Smooth - No raised edges

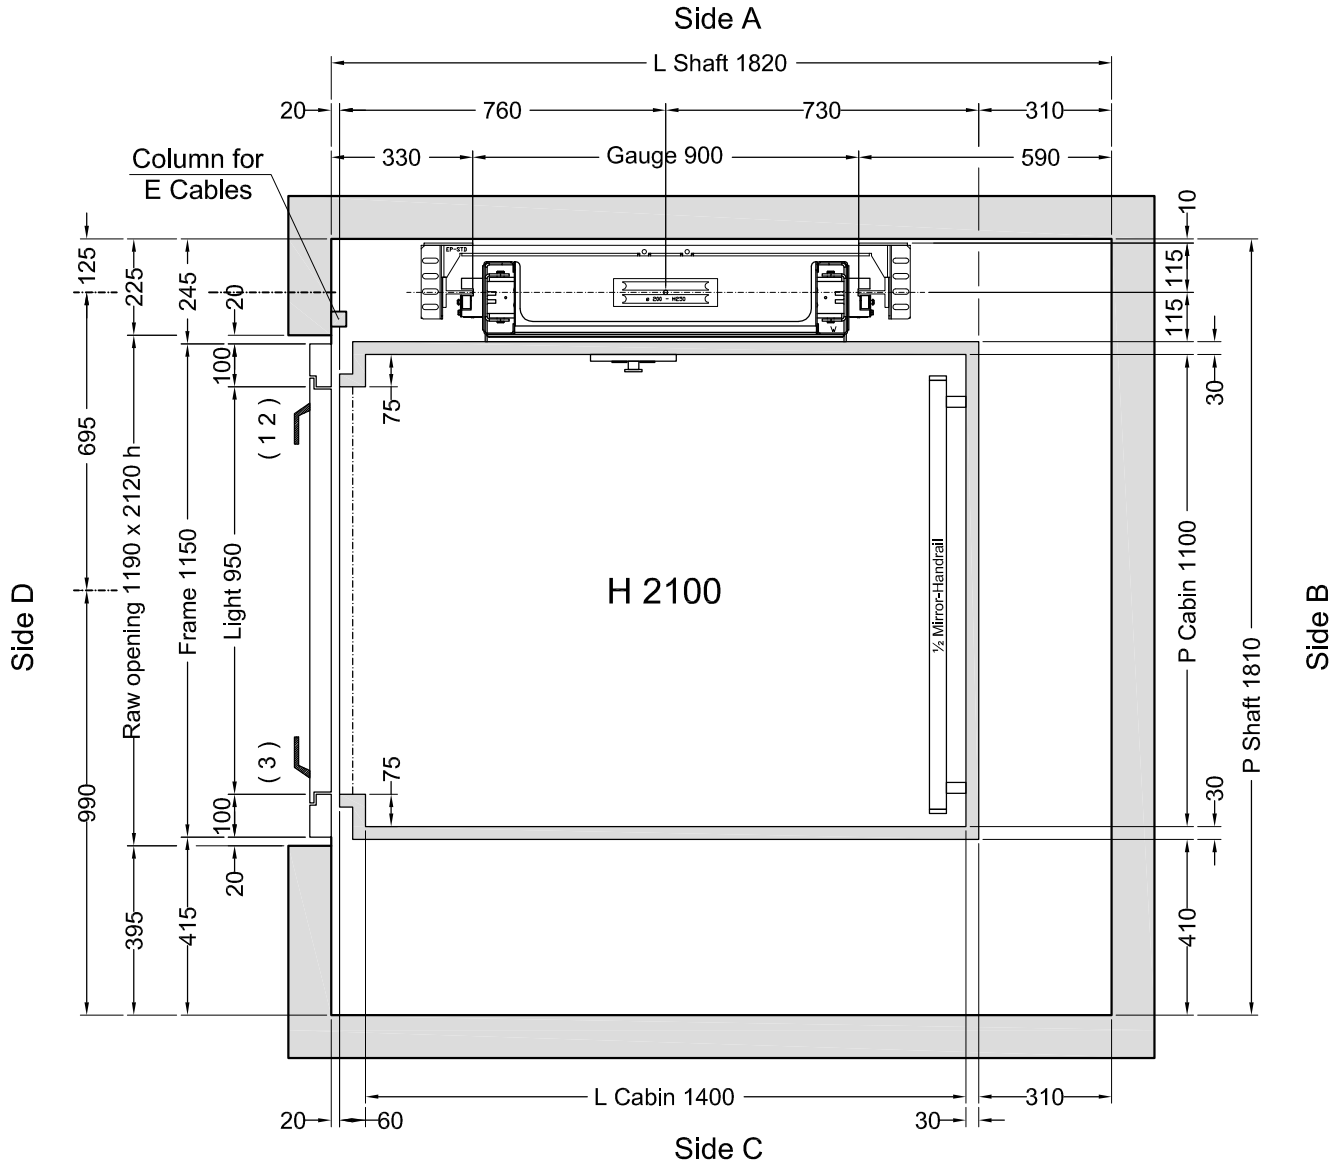


**Stops: 3 - Doors: 3**

Shaft in **Masonry (Muratura)**

	VERSIONS	Description	Designer	Date	Final Drawings	
		Corsa, testata, ciellino, ciernieratura porte, architrave porte	Colamarino	19/11/2013		SHEET DIMENS. <b>A3</b>
			Final Drawings <b>Colamarino</b>	1° STESURA 31/10/13		SCALE 1:12.5
			CAPACITY <b>300 kg</b>	AREA m <sup>2</sup> <b>1,54</b>		CAPACITY

**ACCESSORI:**

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Maniglie CASPIM
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011
- Foro supplementare pulsantiera di cabina (25x25 mm)

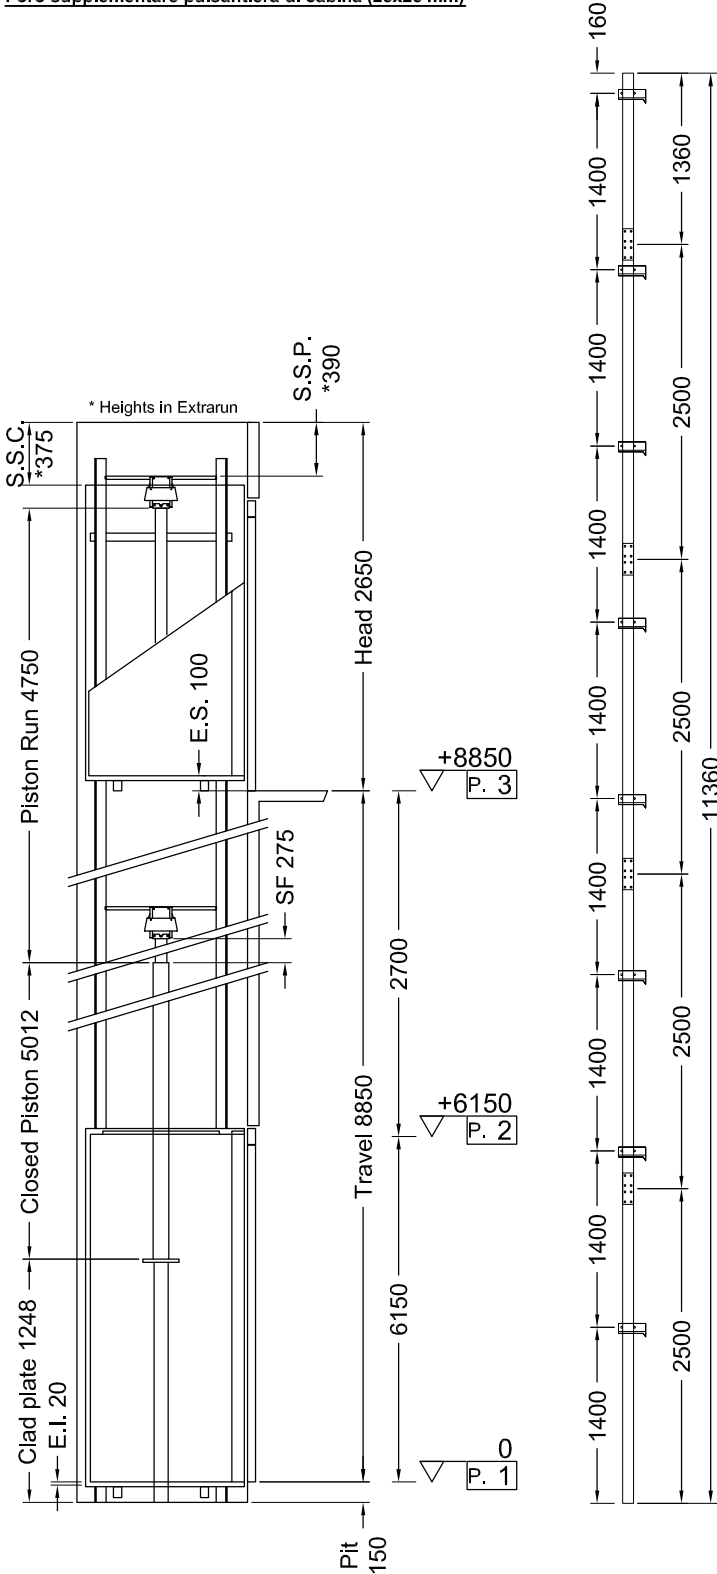

Indirect Installation	Speed 0,3 m/s	25/11/13 15.30 (V.2831)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12086	P	(N)	717
N	(N)	1036	N	(N)	8376
F1	(N)	1620	F1	(N)	2699
F2	(N)	398	F2	(N)	664

SPACES		PRESSURES		
E.I.	Extrairun below cabin (mm)	20	Max static pressure (bar)	36,09
E.S.	Extrairun above cabin (mm)	100	Min static pressure (bar)	20,8
SF.	Piston extraction (mm)	275	Overpressure limit (bar)	50,53
S.S.P.	Piston/head (mm)	390	Residual pressure (bar)	1,86
S.S.C.	Cabin/head (mm)	375		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	<b>GMV HL 3010 (-*)</b>	Runners	<b>T70-2A</b>
Capacity (l/min)	<b>35</b>	Brackets	(Nr) <b>8</b>
Motor (V)	<b>MF230V</b>	Cables	$\varnothing$ <b>9 mm 6-(1+9+9)</b>
Power (Kw)	<b>2,9</b>	Cables length (mm) 2 x	<b>14000</b>
Corrente (A)	<b>19</b>	Min actual breaking load (N)	<b>47300</b>
Piston	<b>START Hom<math>\varnothing</math> 70x5x4750</b>		
Opt. oil position	<b>BASSO</b>		
Tubing	<b>3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"</b>		
Tubing length (mm)	<b>6000</b>		
Min hydraulic oil (L)	<b>54</b>		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	LVT	LVT11	TUV DPD 010
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	TIEFFE	TIEFFE2000	IMQ 10110

MACHINERY LOCATION			
At floor	1	Length of the hose travel	2000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	<b>Grigio PPS1</b>	1/2 Mirror	<b>Side B</b>
Finishes	<b>Inox BA mecc.</b>	Handrail	<b>Inox BA (Lucido), Side B</b>
Oper. panel	<b>VERTICAL (Like finishes) **</b>		
Floor	<b>121-008 - Chestnut</b>		
Roof	<b>UNIVERSAL - Blanco A1</b>		
(**) Extra cut out 25x25 mm			

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Handles CASPIM
<u>Telephone by Lift Shop</u>
Full height Infra-red curtain V2
Automatic Control 2011
<u>Extra cut out in the cabin control panel (25x25 mm)</u>

The information contained in this drawing are completed by masonry manual rev.4 | \* See masonry manual rev. 4

	Final Drawings Colamarino	1° STESURA 31/10/13
	<b>Final Drawings</b>	
	SCALE OUT OF SCALE	SHEET 2/2