
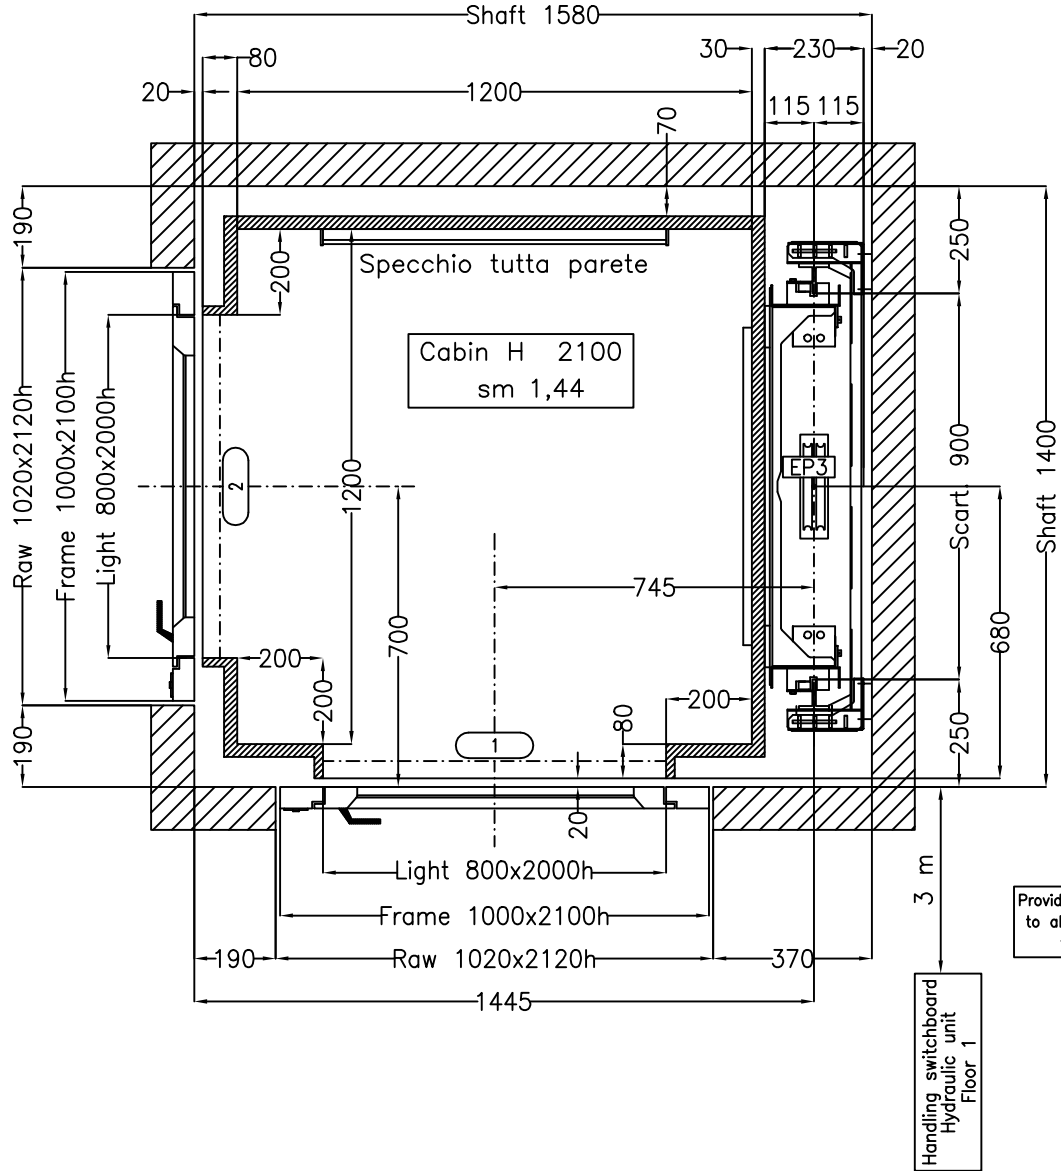


NOT STANDARD

Speed
Full Height Infra-red Curtain
Quadro e centralina in armadio
Cielino Cabina Inox tipo fiera
pavimento predisposto per rivestim.
a carico cliente spessore mm15
peso massimo Kg 50
Manovra con autotenuta


FUORI STANDARD

Velocità
Fotocellule Tutta Parete
Quadro e centralina in armadio
Cielino Cabina Inox tipo fiera
pavimento predisposto per rivestim.
a carico cliente spessore mm15
peso massimo Kg 50
Manovra con autotenuta




Provide an inspectionable canalization to allow the way to the piping and to the electrical installation

Shaft: C.A.		SHEET DIMENSION A3		DATE OF MODIFICATIONS		Steps: 2		Doors: 2	
Variante Disegno Definitivo						Check that the characteristics given in the technical drawing are in accordance with the order form			
Modifications	d					HOISTWAY NOTES FOR THE CLIENT ○ Load bearing structures of the hoistway must be able to sustain the loads indicated. The dimensions of the elevator shaft must be guaranteed with allowances of ± 1 cm. and the walls must be perfectly plumbed ○ We suggest making ventilation ducts with surfaces of at least 1% of the horizontal section of the hoistway. ○ The pit must be protected against water leaks.			
	c								
	b	variante disegno		11/03/2004					
	a	cernieratura , nessun accessorio in cabina , corsa		05/03/2004					
N M		MODEL	SPEED	Preliminary drawing					
		ELFO AEP3 TAGLIA	0.24 m/s	Dario Ogliastro					
			CAPACITY	Date of first draft					
			300 Kg	26.02.04					
				Scale	Sheet				
				1/12.5	1/2				



THE LIFT HAS VALUE ONLY FOR THE VERTICAL HEIGHTS SHOWN

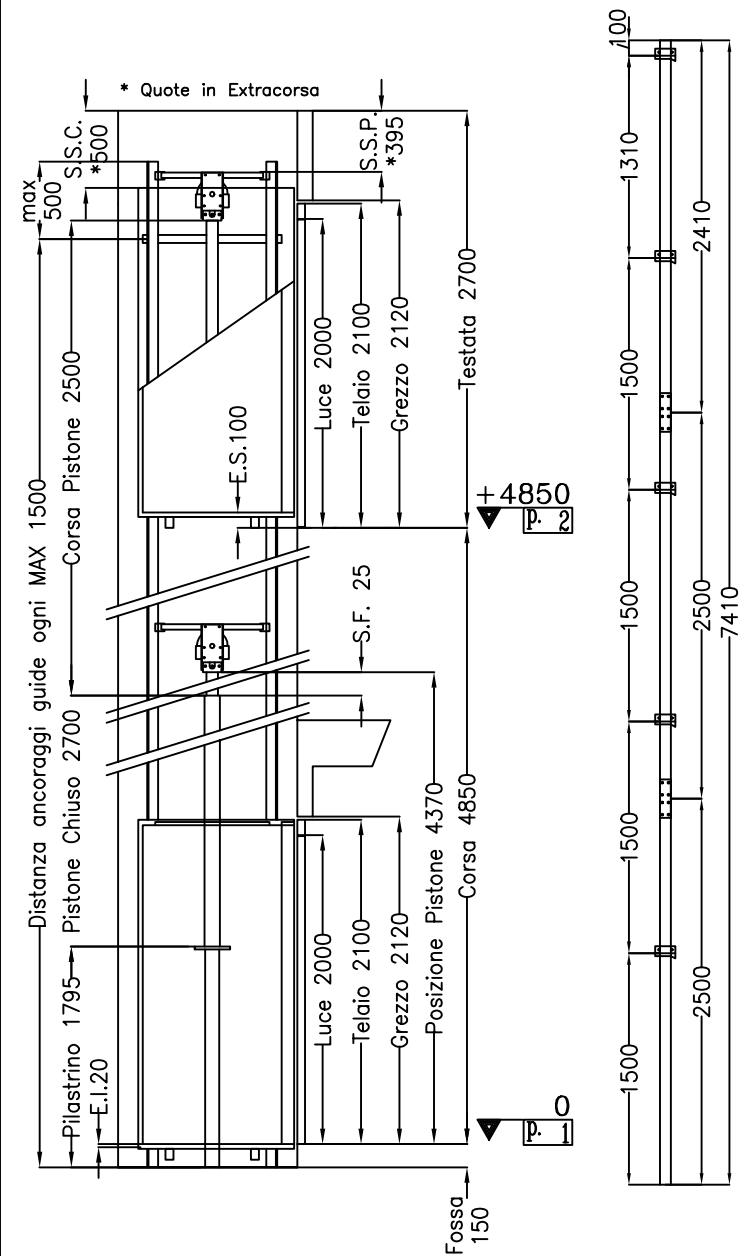

Indirect Installation

Ver. 10/02/2004

Thrust during normal operation

05.03.04 - 08:33

P (N) 10459
N (N) 660
Fx (N) 1502
Fy (N) 297

Thrust of safety device intervention

P (N) 672
N (N) 6903
Fx (N) 2751
Fy (N) 0

Pressures

max static pressure (bar) 26,41
min static pressure (bar) 14,70
overpressure limit (bar) 36,97
residual pressure (bar) 1,34

Spaces

extrarun below cabin E.I. (mm) 20
extrarun above cabin E.S. (mm) 100
piston extraction SF (mm) 25
piston/head S.S.P. (mm) 395
cabin/head S.S.C. (mm) 500

Hydraulic unit

piston MORIS 9130
diam. (mm) 80x7,5
total piston run (mm) 2500
closed piston (mm) 2700
opt. oil position basso

central unit MORIS CP1
capacity (l/min) 35
motor (V) 220
power (Hp) 3,5

tubing Tipo SAE 100 R1/T
length (mm) 7000

hydraulic oil
min. litres (L) 69

Mechanical parts

runners T70/2A
length (mm) 7410
brackets (qt.) 5

cables Fune acciaio 9 mm 6 trefoli
length (mm) 9900

zinc clad plate 88.8
length (mm) 1795

arcade AEP3 scart.900 mens.131 mont.2100 cil. 80
Pilot Cable (mm) 15000

Cabin

panels Inox Scotch Brite
finishes Inox Scotch Brite
floor grezzo
operator panel Inox Scotch Brite 900 mm

lobby door/s

All-Tutte

RAL 7035

Panoramic Transparent Glass

Accessori:

cielino inox tipo fiera
Fotocellula/e tutta parete
Barre guide da 2,5 m
Arcata rinforzata - Mensola tipo UK
Parete tutta Specchio Lato 4

Accessories:

Full Height Infra-red Curtain/s
Guides bars dimension 2,5 m
Reinforced Arcade - Bracket type UK
Parete Mirror Side 4

Check that the characteristics given in the technical drawing are in accordance with the order form

Disegno Definitivo

DATE OF MODIFICATIONS

Modifications

d	.	.
c	.	.
b	.	.
a	corsa da 4600 a 4850	5/03/2004

CAPACITY: 300 Kg

Preliminary drawing

Dario Ogiastro

DATE

26.02.04

--

