

FLOOR DOOR


Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		1	2 Panels Inox BA (Lucido)	2000	2210	Inox BA (Lucido)	Panoramic	Fumè	C2 - Icaro Display
		2	2 Panels Inox BA (Lucido)	2000	2210	Inox BA (Lucido)	Absent		C2 - Icaro Display

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

Shaft V66 ()

ENVIRONMENT	VERSION	CLADDING	START	ROOF	ANCHORAGE
Inside	Inox BA	See pages 3 and 4	Pit bottom	For Inside	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Interno	Inox BA	Vedi Pag. 3 e 4	Fondo Fossa	Per interno	

Side A

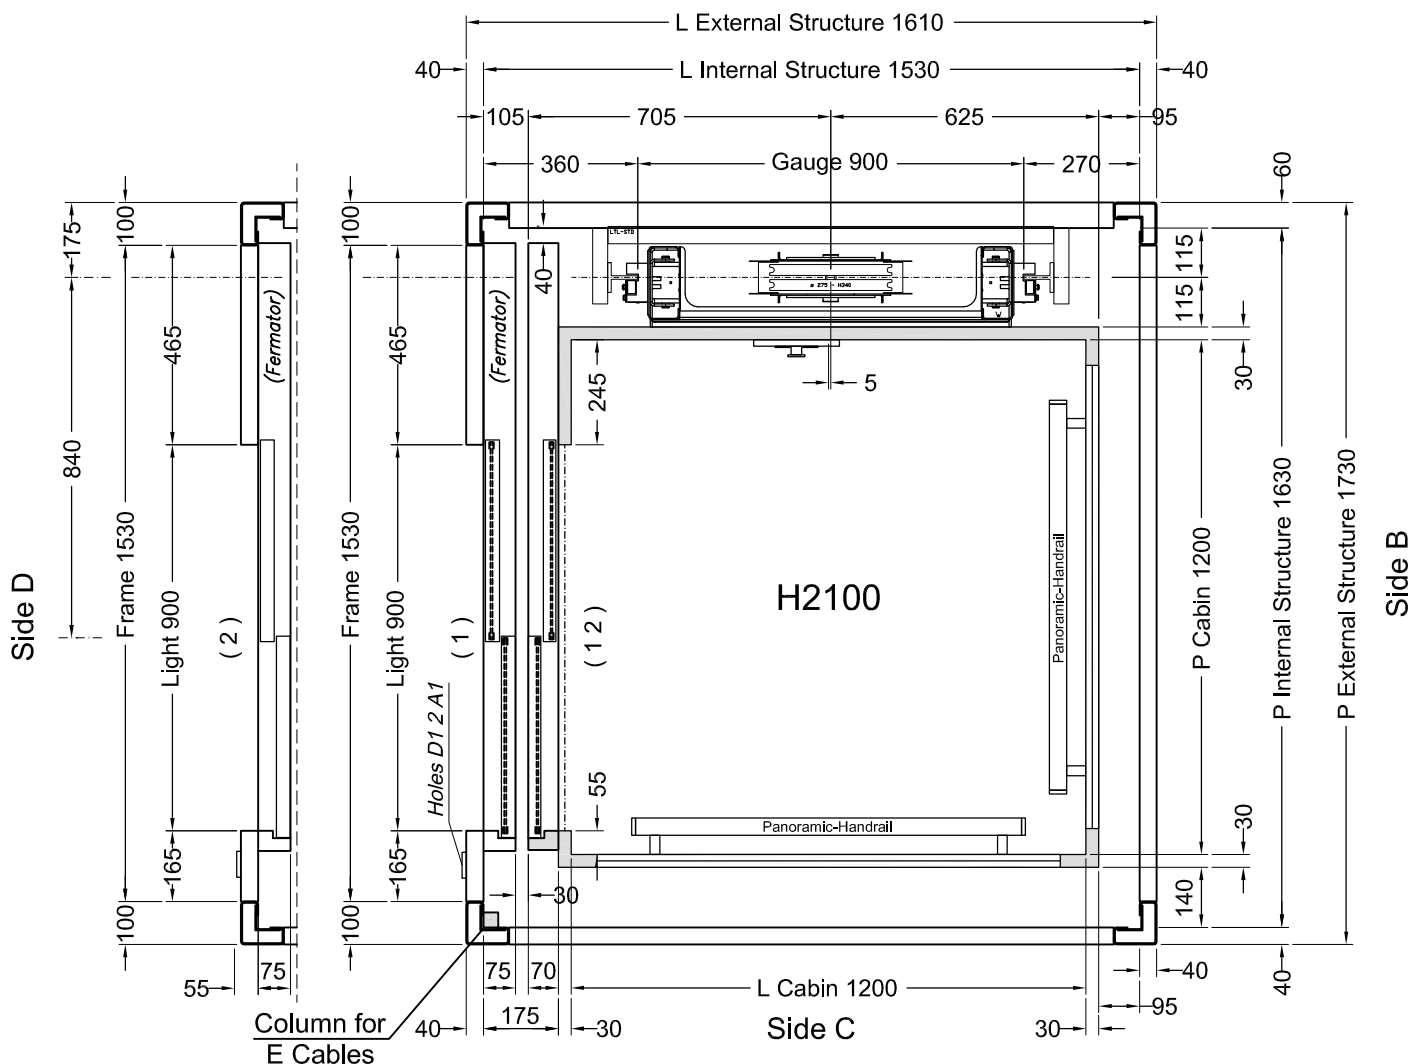

Stops: 2 - Doors: 2

Shaft in **Shaft V66 ()**



VERSIONS	Description	Designer	Date	Rev. Final Drawings	
				Model	SHEET
1	Modello struttura. Corsa e pavimento	L. Del Bianco Colamarino	12/07/2013 24/06/2013	ELFO 2	1/4
		Final Drawings L. Del Bianco	1° STESURA 26/06/13		SHEET DIMENS. A3
		CAPACITY 350 kg	AREA m ² 1,44	CAPACITY	SCALE 1:12.5




Shaft V66 ()

ENVIRONMENT	VERSION	CLADDING	START	ROOF	ANCHORAGE
Inside	Inox BA	See pages 3 and 4	Pit bottom	For Inside	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Interno	Inox BA (Lucido)/edi	Pag. 3 e 4	Fondo Fossa	Per interno	

Anchorage in height of 3 frames in head and every 3.5 m max

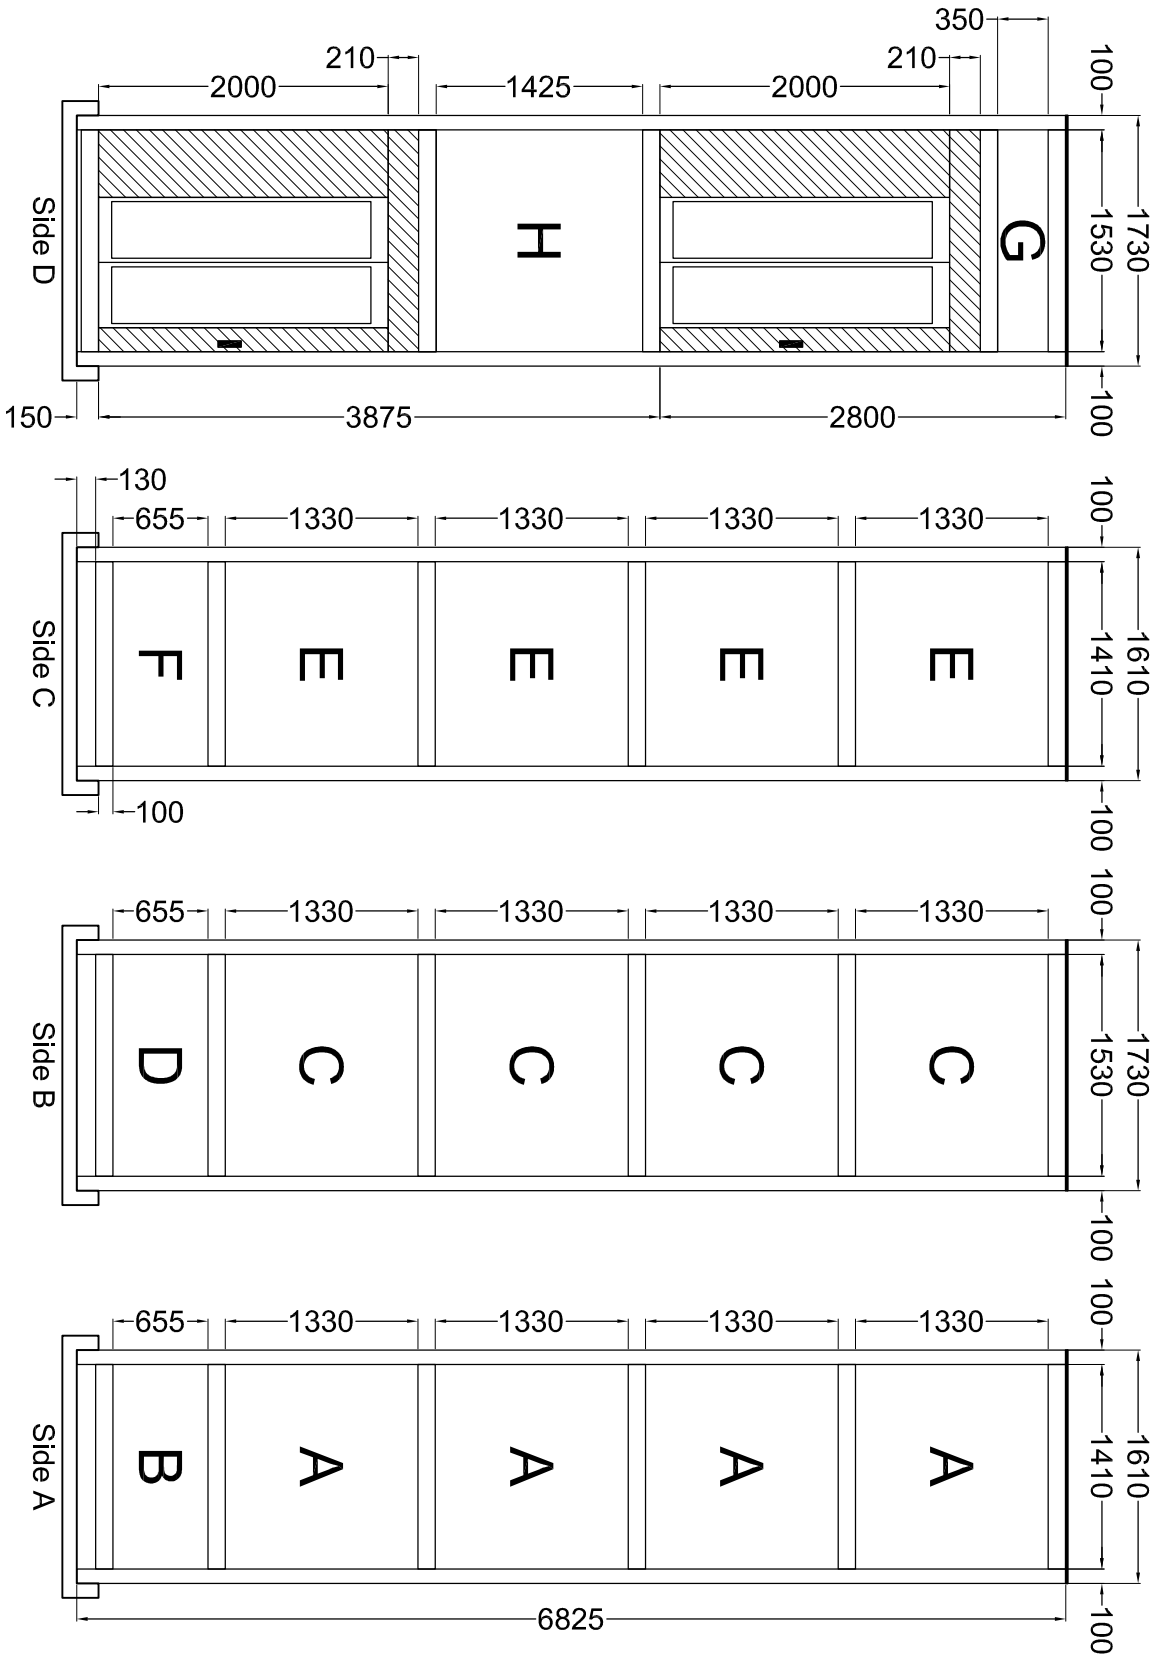

Frames Inox BA (Lucido)



Telaio Inox BA (Lucido)

