



FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
G 1 2			Standard RAL 7001	2000	2100	RAL 7001	Absent		C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

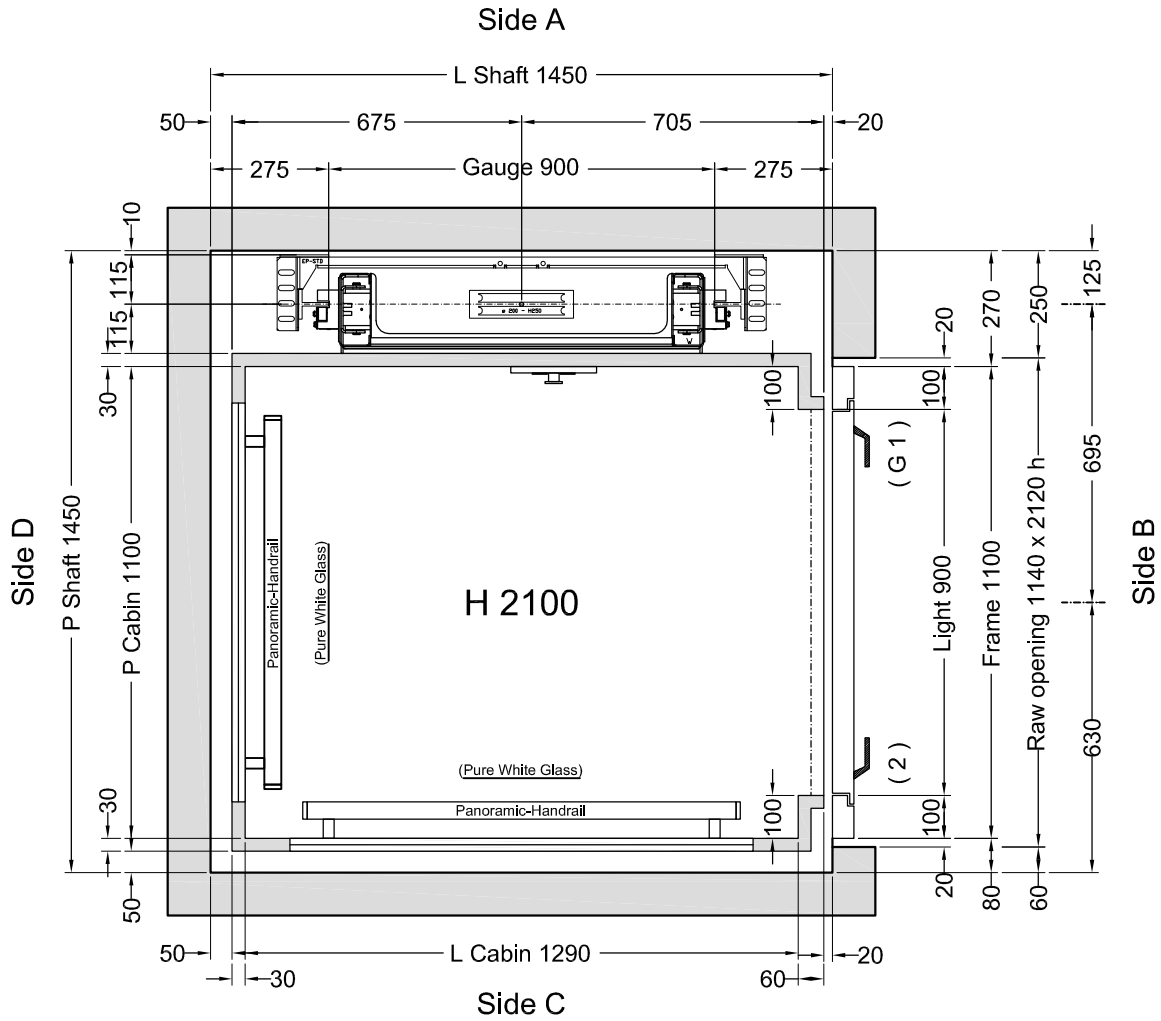

Feasibility n° 1958 - Pure White Glass

Stops: 3 - Doors: 3


Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1320 (L) x 1100 (P)** thks **20 mm** Weight: **50 kg**


		Designer	Date	Final Drawings	
				Model	SHEET
				ELFO	1/2
		L. Del Bianco	19/06/2014		SHEET DIMENS.
		Final Drawings L. Del Bianco	1° STESURA 26/06/14		A3
		CAPACITY	AREA m ²	CAPACITY	SCALE
		350 kg	1,42		1:12.5

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Maniglle CASPIM
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011

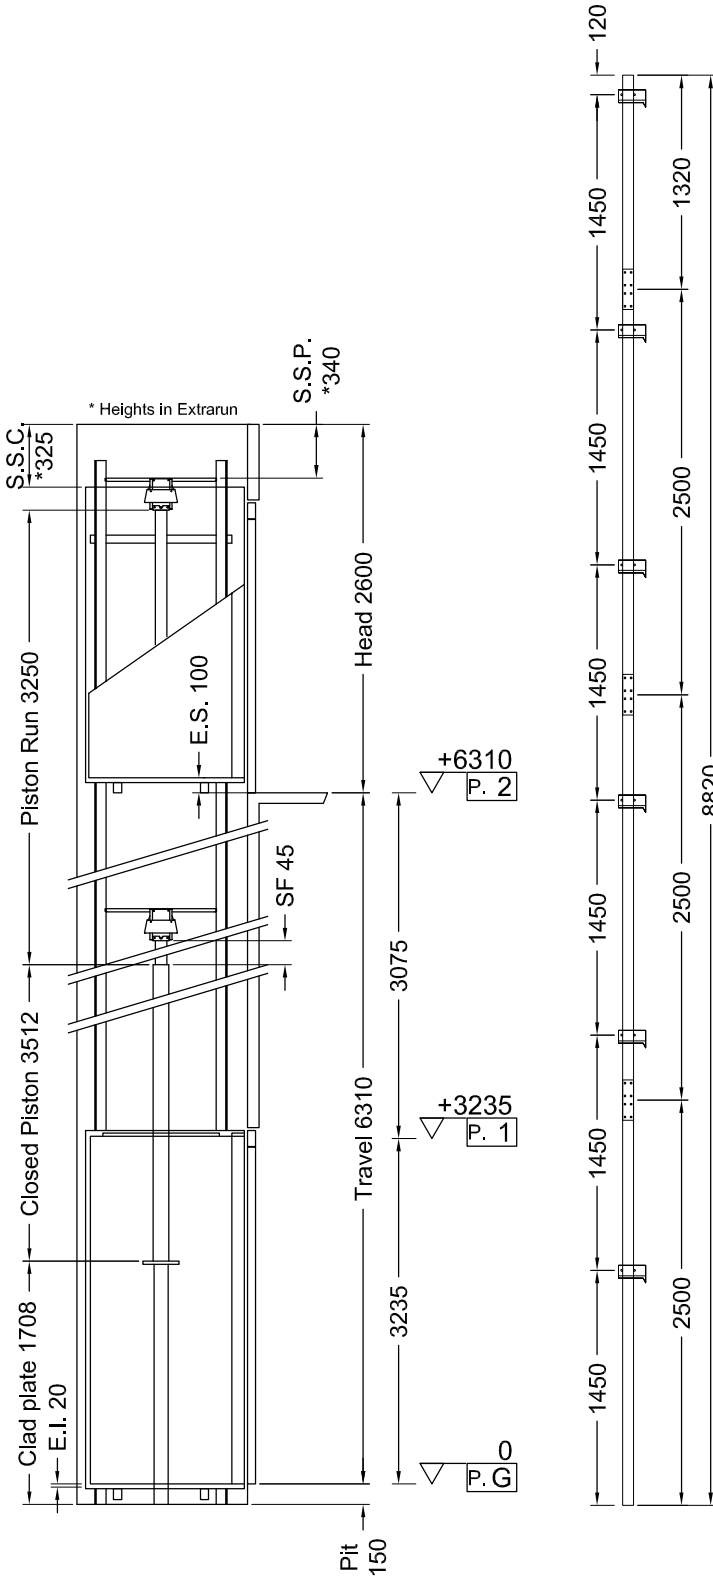

Indirect Installation		Speed 0,3 m/s	26/06/14 14.51 (V.2844)
THRUST DURING NORMAL OPERATION		THRUST OF SAFETY DEVICE INTERVENT.	
P	(N) 12434	P	(N) 599
N	(N) 805	N	(N) 8495
F1	(N) 1677	F1	(N) 2796
F2	(N) 340	F2	(N) 567
SPACES		PRESSURES	
E.I.	Extrarun below cabin (mm) 20	Max static pressure	(bar) 41,55
E.S.	Extrarun above cabin (mm) 100	Min static pressure	(bar) 23,71
SF.	Piston extraction (mm) 45	Overpressure limit	(bar) 58,17
S.S.P.	Piston/head (mm) 340	Residual pressure	(bar) 1,56
S.S.C.	Cabin/head (mm) 325		
HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Runners	T70-2A
Capacity (l/min)	35	Brackets	(Nr) 6
Motor (V)	MF230V	Cables	Ø 9 mm 8-(1+9+9)
Power (Kw)	2,9	Cables length (mm) 2 x	12000
Corrente (A)	19	Min actual breaking load (N)	51000
Piston	START Homø 70x5x3250		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	11000		
Min hydraulic oil (L)	48		
SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	
MACHINERY LOCATION			
At floor	2	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	D		
CABIN	CABIN ACCESSORIES		
Panels	Galvanized sheet	Panoramic **	Side C, D
Finishes	Inox Scotch Brite	Handrail	Inox S.B., Side C,D
Oper. panel	VERTICAL (Like finishes)	-	-
Floor	By Customer	-	-
Ceiling	SPOTS LED - Inox Scotch Brite	(**) Pure White Glass	
OTHER ACCESSORIES			
Enabling key for the cabin button pad, double insertion			
Guides dimension 2.5 m			
Manual pump			
Manostat with overweight signal			
Two speed			
Handles CASPIM			
Telephone by Lift Shop			
Full height Infra-red curtain V2			
Automatic Control 2011			



Final Drawings	1° STESURA
L. Del Bianco	26/06/14
Final Drawings	
SCALE	SHEET
OUT OF SCALE	2/2