


## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
1 2 3			2 Panels RAL 9003	2000	2210	RAL 9003	Panoramic	Etched Neutral	C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

### Shaft V66 ()

ENVIRONMENT	VERSION	Cladding	START	ROOF	ANCHORAGE
Inside	Galvanized	Glass	Pit bottom	For Inside	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Interno	Zincata	Vetro	Fondo Fossa	Per interno	

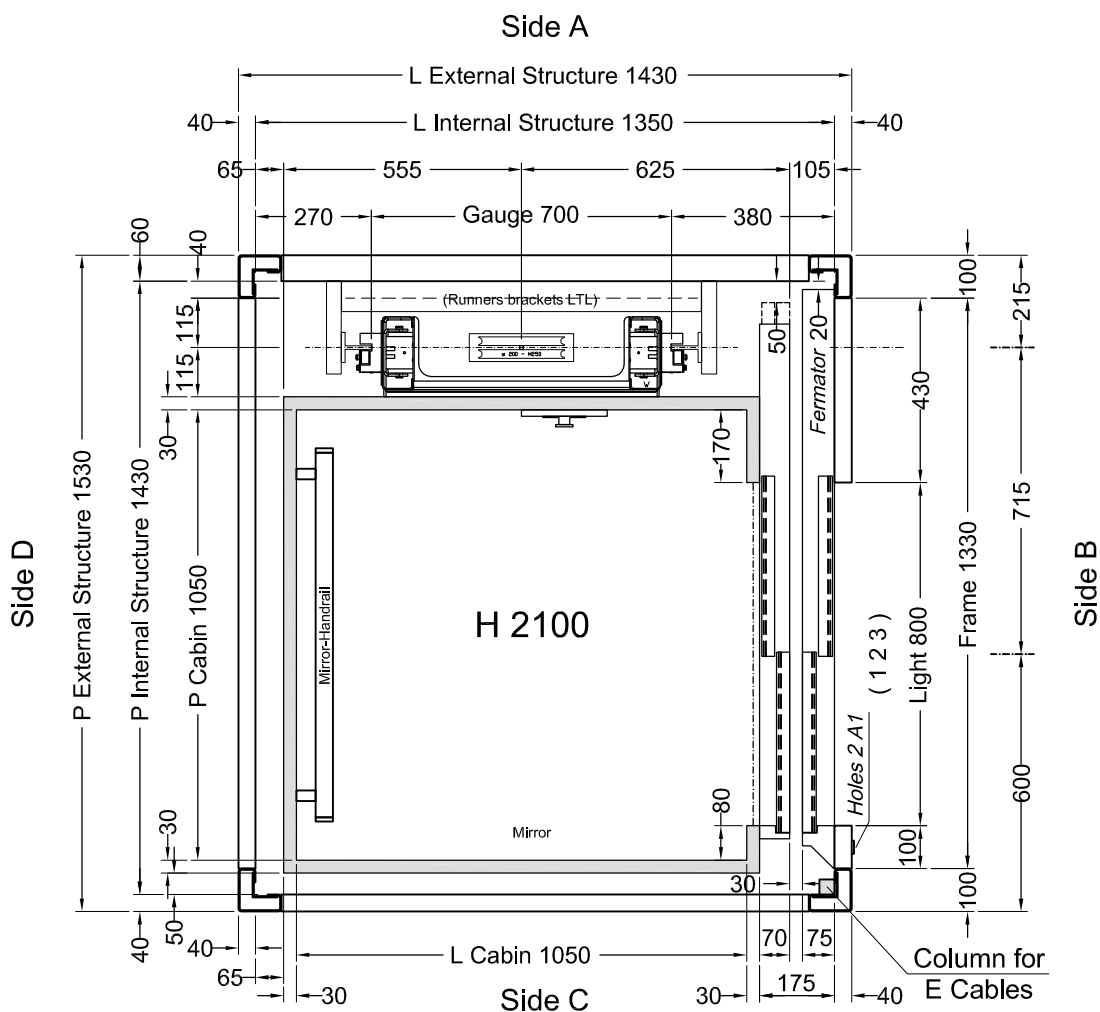


**Stops: 3 - Doors: 3**

Shaft in **Shaft V66 ()**

Customer own flooring: Dimensions **1080 (L) x 1050 (P)** thks **20 mm** Weight: **50 kg**

ORDER	VERSIONS	Description	Designer	Date	Final Drawings	
ORDER NUMBER					Model	SHEET
<b>PS1890</b>					<b>ELFO 2</b>	<b>1/4</b>
		dim cabina, colore antine di piano e talai, corsa interpiani e testata	D.Ogliastro	25/02/2015		SHEET DIMENS.
	corsa, vetro escluso forniture, labirint led strips, antine di piano A32PP	D.Ogliastro	12/02/2015	<b>A3</b>		
CLIENT		Final Drawings	1° STESURA			
Lift Shop		L. Del Bianco	04/03/15			
		CAPACITY	AREA m <sup>2</sup>	CAPACITY		
		<b>350 kg</b>	<b>1,11</b>			

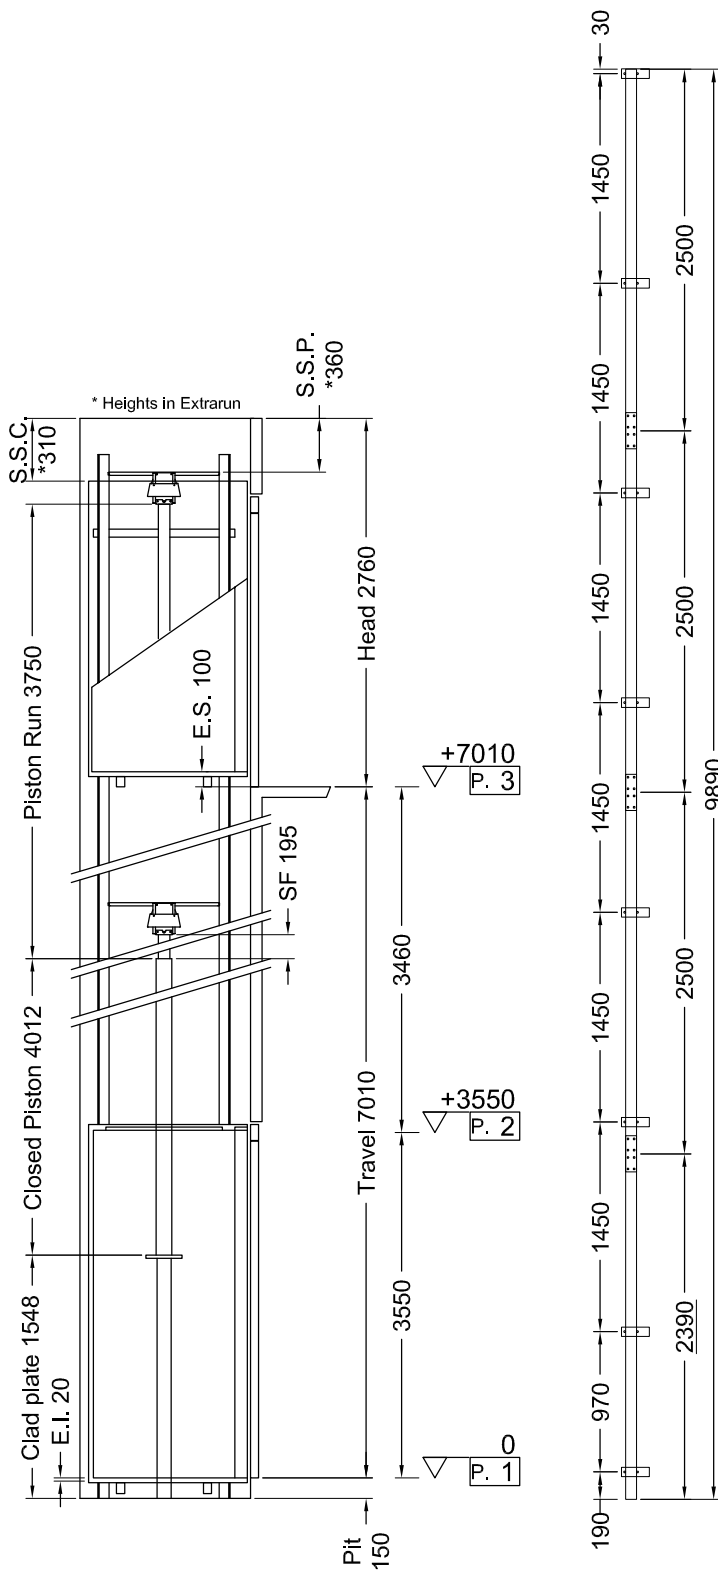

Indirect Installation Speed 0,3 m/s 04/03/15 14.24 (V.2851)

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12922	P	(N)	638
N	(N)	920	N	(N)	8897
F1	(N)	1566	F1	(N)	2611
F2	(N)	260	F2	(N)	433

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	43,44
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	25,59
SF.	Piston extraction (mm)	195	Overpressure limit (bar)	60,81
S.S.P.	Piston/head (mm)	360	Residual pressure (bar)	1,66
S.S.C.	Cabin/head (mm)	310		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	35	Guide rails	70x70x9
Motor (V)	MF230V	Brackets	(Nr) 8
Power (Kw)	3,4	Ropes	Ø 9 mm 8-(1+9+9)
Nominal current (A)	32	Cables length (mm) 2 x	13000
Piston	Start Home (Ø)70x5x3750	Min actual breaking load (N)	51000
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	9000		
Min hydraulic oil (L)	50		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	FERMATOR	210/10/40	

MACHINERY LOCATION			
At floor	1	Length of the hose travel	5000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Inox Nero Lucido	Mirror	Side C, D
Finishes	Inox Scotch Brite	Handrail	Inox S.B., Side D
Oper. panel	VERTICAL Inox BA mecc.		
Floor	By Customer		
Ceiling	LABIRINT Led Strips - Inox BA mecc.		
Cabin Doors	Side B: 2-Panels Automatic Sliding doors, Panoramc Etched Neutral and Inox Scotch Brite		


OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Return to the lower floor after adjustable time
False head device
Telephone by Lift Shop
Full height infra-red curtain V2
Automatic Control 2011
Open door button In cabin



### Shaft V66 ()

ENVIRONMENT	VERSION	Cladding	START	ROOF	ANCHORAGE
Inside	Galvanized	Glass	Pit bottom	For Inside	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Interno	Zincata	Vetro	Fondo Fossa	Per interno	

*Anchorage in height of 3 frames in head and every 3.5 m max*

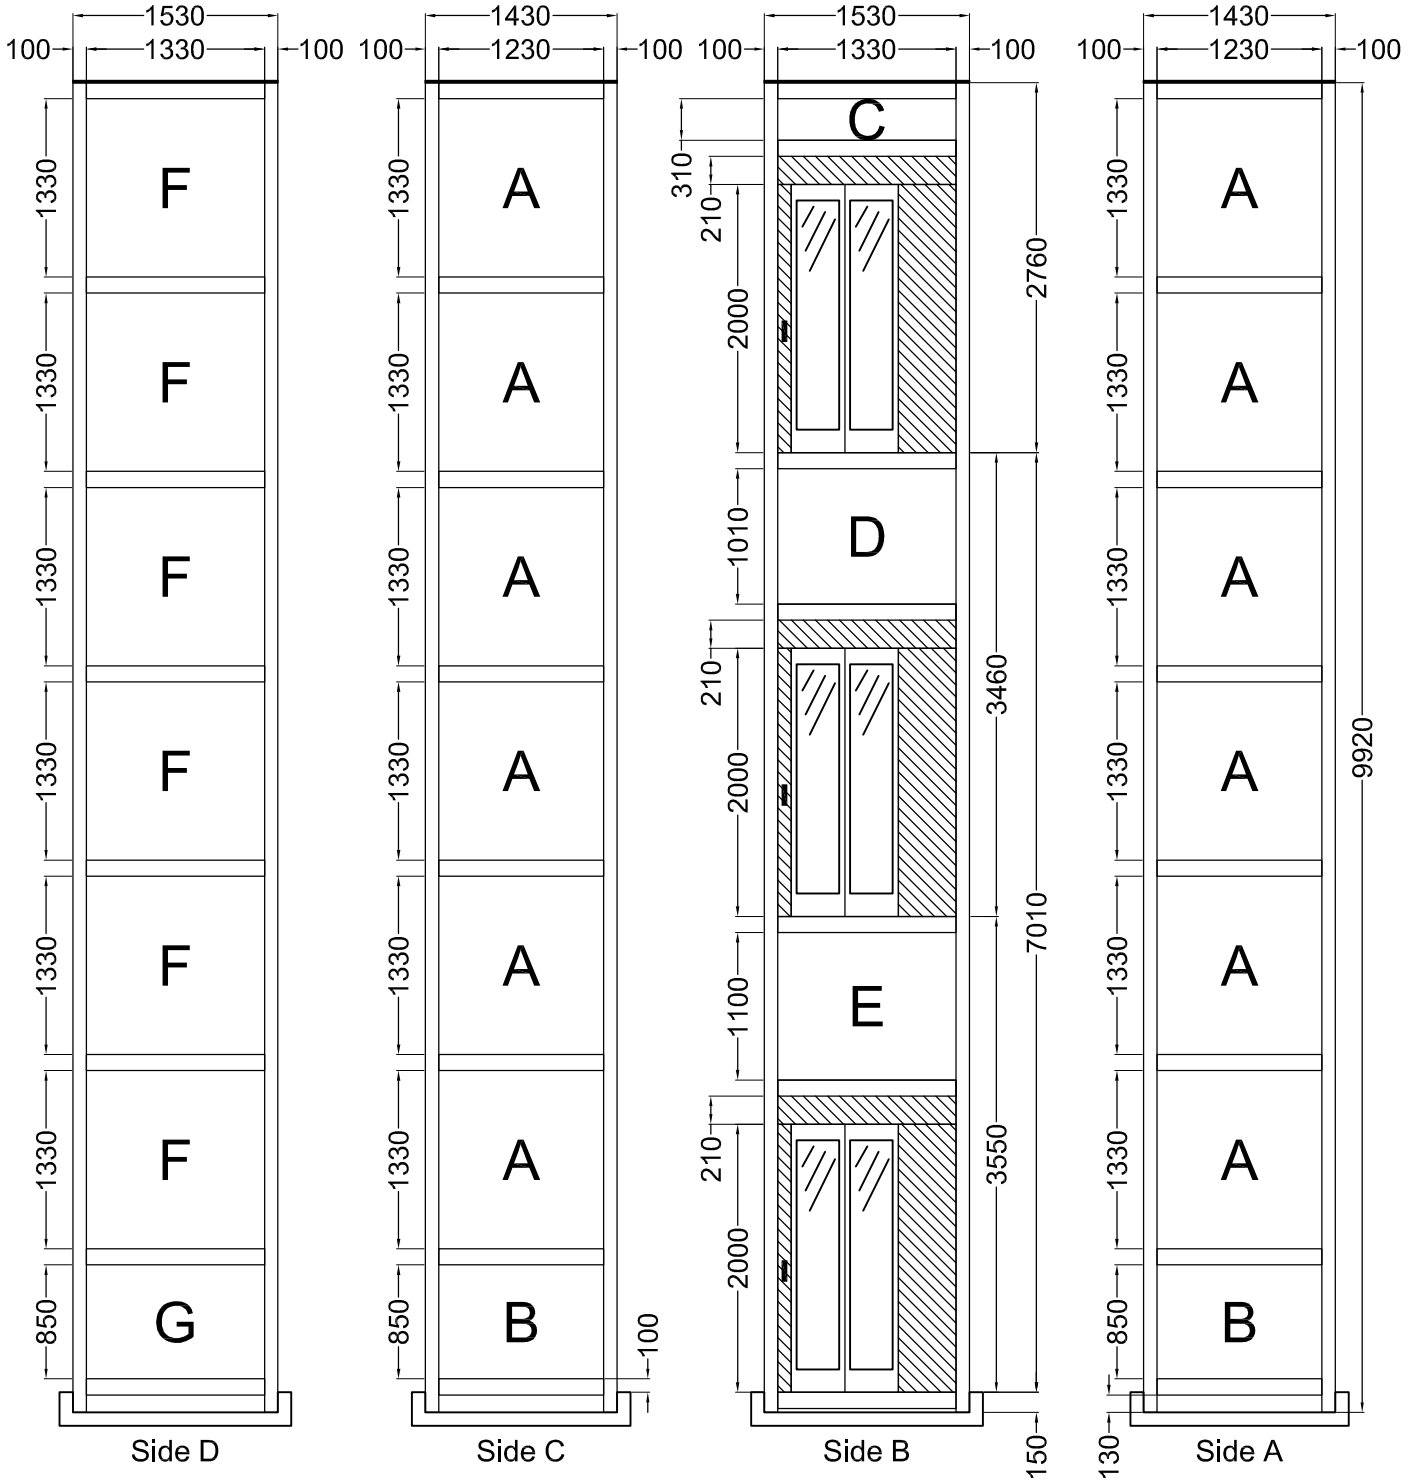

- Frames RAL 9003
- Telai RAL 9003