FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		1	2 Panels Full Glass *	2000	2210	Inox Scotch Brite	Panoramic	Transparent	C2 - Icaro Display
		2 3	2 Panels Full Glass *	2000	2210	Inox Scotch Brite	Panoramic	Transparent	Icaro Display

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(*) Frameless / Inox Scotch Brite

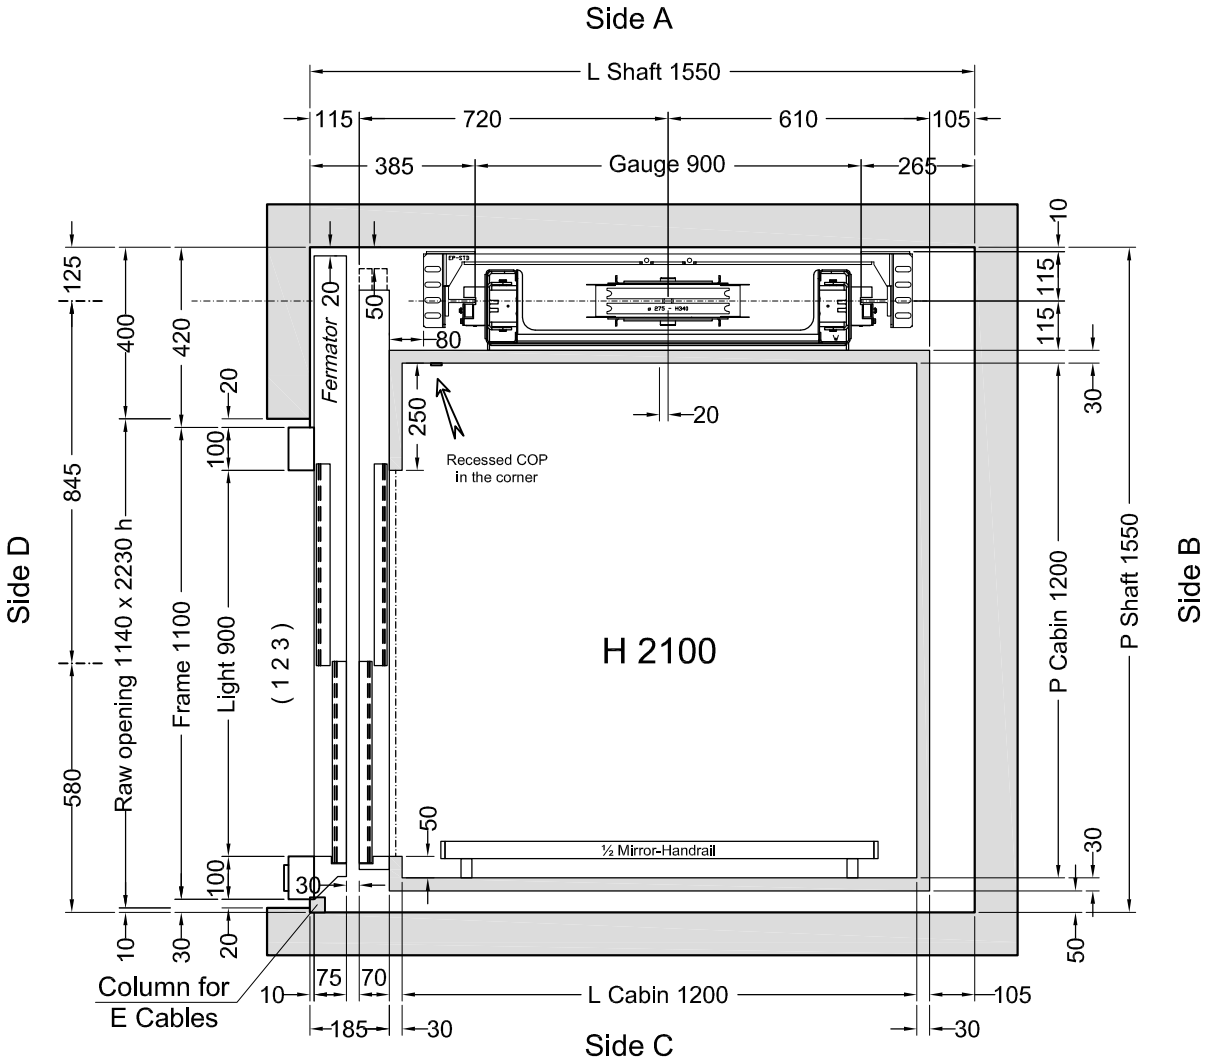

Snaps 0001

Stops: 3 - Doors: 3

Shaft in **Reinforced concrete (C.A.)**

Customer own flooring: Dimensions **1230** (L) x **1200** (P) thks **20** mm Weight: **50** kg

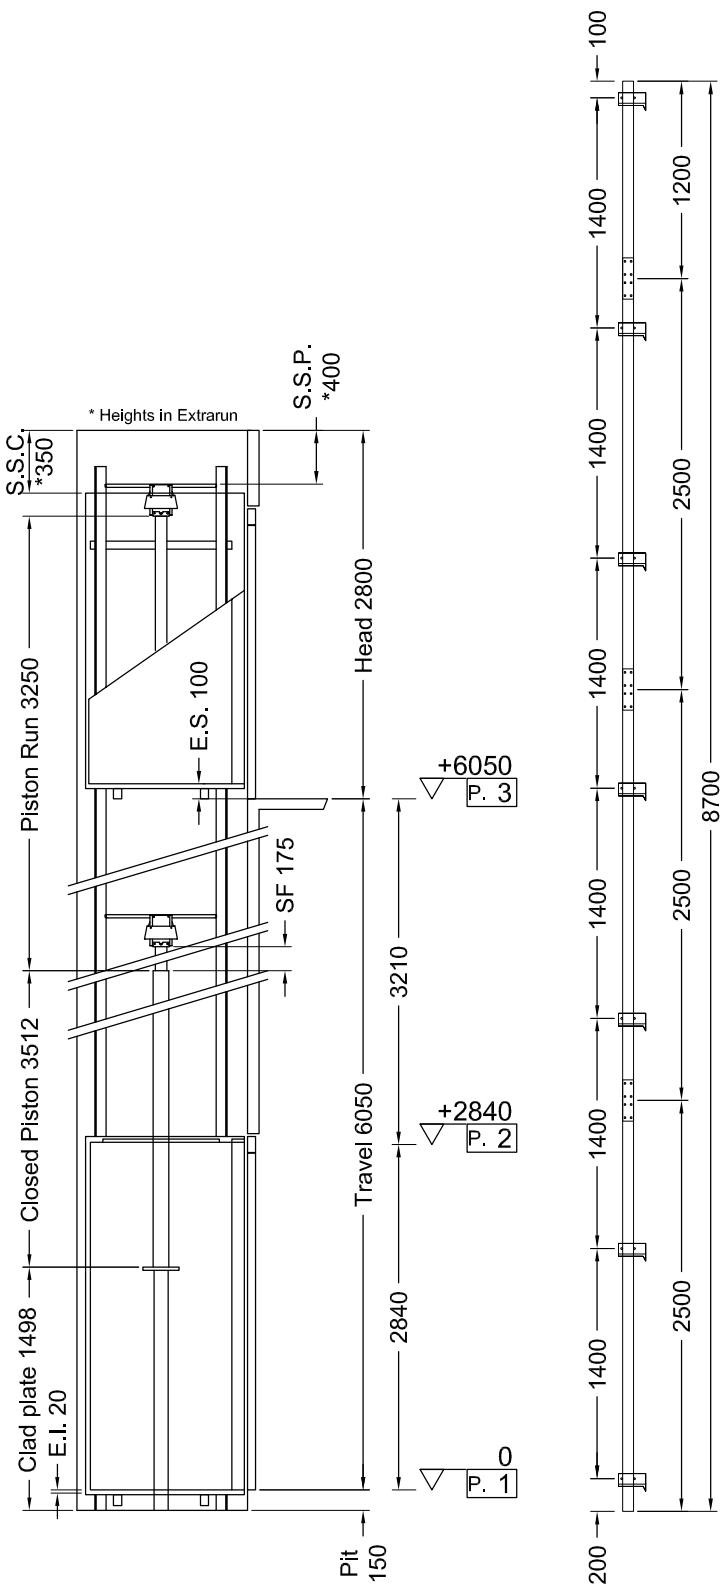

Indirect Installation	Speed	0,3 m/s	28/07/15 12.08	(V.2852)

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	**13513**	P	(N)	648
N	(N)	**829**	N	(N)	9190
F1	(N)	**1823**	F1	(N)	3039
F2	(N)	**302**	F2	(N)	504

SPACES				PRESSURES		
E.I.	Extrarun below cabin	(mm)	**20**	Max static pressure	(bar)	**44,91**
E.S.	Extrarun above cabin	(mm)	**100**	Min static pressure	(bar)	**27,06**
SF.	Piston extraction	(mm)	**175**	Overpressure limit	(bar)	**62,87**
S.S.P.	Piston/head	(mm)	**400**	Residual pressure	(bar)	**1,68**
S.S.C.	Cabin/head	(mm)	**350**			

HYDRAULIC UNIT			MECHANICAL PARTS		
Central unit		**GMV HL 3010 (-*)**			
Capacity (l/min)		**35**	Guide rails		**70x70x9**
Motor	(V)	**MF230V**	Brackets	(Nr)	**7**
Power	(Kw)	**3,4**	Ropes	Ø	**11 mm 6-(1+9+9)**
Nominal current	(A)	**32**	Cables lenght (mm) 2 x		**12000**
Piston **Start Home**		**(ø)70x5x3250**	Min actual breaking load (N)		**70700**
Opt. oil position		**BASSO**			
Tubing		**3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"**			
Tubing lenght	(mm)	**5000**			
Min hydraulic oil	(L)	**46**			

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	**PFB**	**BP1**	**TÜV AFV515**
Block Valve	**START ELEVATOR**	**1/2" 0327**	**CA50.00525**
Key Locks	**FERMATOR**	**210/10/40**	

MACHINERY LOCATION				
At floor	**1**	Length of the hose travel	**1000**	(mm)
Cables enter in shaft: Side	**A**			

CABIN		CABIN ACCESSORIES	
Panels	**Grigio PPS1**	½ Mirror	**Side C**
Finishes	**Inox Scotch Brite**	Handrail	**Inox S.B., Side C**
Oper. panel	**Vertical Recessed mounted ****	Outside covering	**Roof**
Floor	**By Customer**	Outside finishing	**Grigio PPS1**
Ceiling	**UNIVERSAL - Grigio PPS1**		

Cabin Doors

Side D: 2-Panels Automatic Sliding doors, Frameless Clear Glass

(**) in the corner AD

(Buttons directly into profile - no cover plate)

OTHER ACCESSORIES

Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Return to the lower floor after adjustable time
Telephone by Lift Shop
Full height Infra-red curtain V2
Roof covering
ICARO display in cabin on COP
Automatic Control 2011
Door open button on COP
Call Accept
Emergency manual descent from cabin