


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	WINDOW	GLASS	ACCESSORIES	C1	C2	PM	PE
1 2 3 4			STANDARD RAL 1013 (Smooth)	2000	2100	PANORAMIC	STOPSOL			X		

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

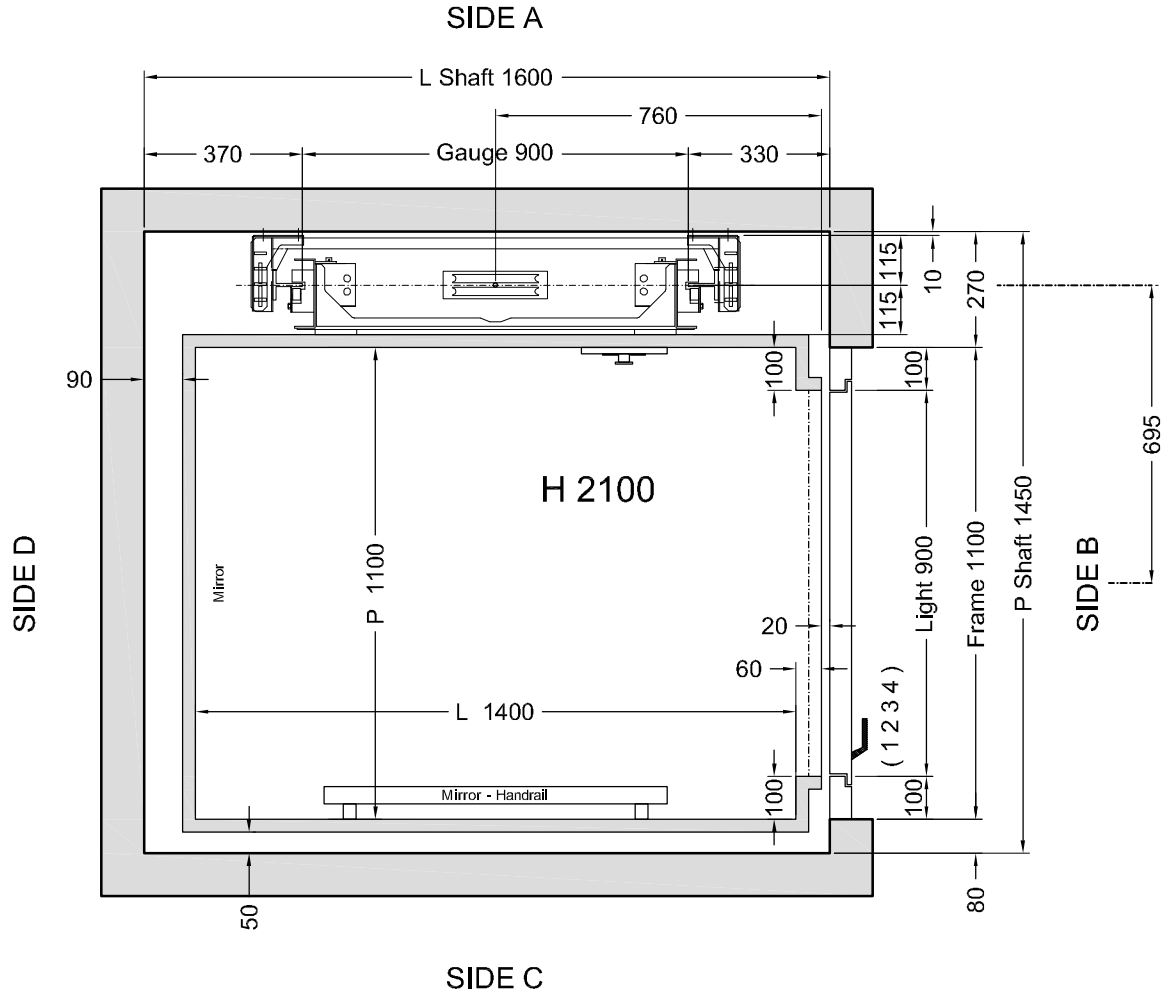

Pavimento a carico Cliente: Dim. **1430 (L) x 1100 (P)** Spes. **15 mm** Peso: **50 Kg**
(EN)


Stops: 4 - Doors: 4

Shaft on **MASONRY (MURATURA)**

VERSIONS	Description	Designer	Date	Disegno Definitivo
	Varie Modifiche.	L. Del Bianco	21/04/2009	SHEET 1/2 SHEET DIMENS. A3 SCALE 1:12.5
	Porte Standard 1 Battente; Correzione: Corrimano Inox.	L. Del Bianco	06/04/2009	
		Disegno Definitivo L. Del Bianco	1° STESURA 21/04/09	CAPACITY 350 Kg AREA m ² 1,54 CAPACITY

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato
- Doppia velocità
- Manovra Automatica
- Arcata rinforzata
- Maniglie CASPIM
- Fotocellula tutta parete
- Pistone in 2 pezzi

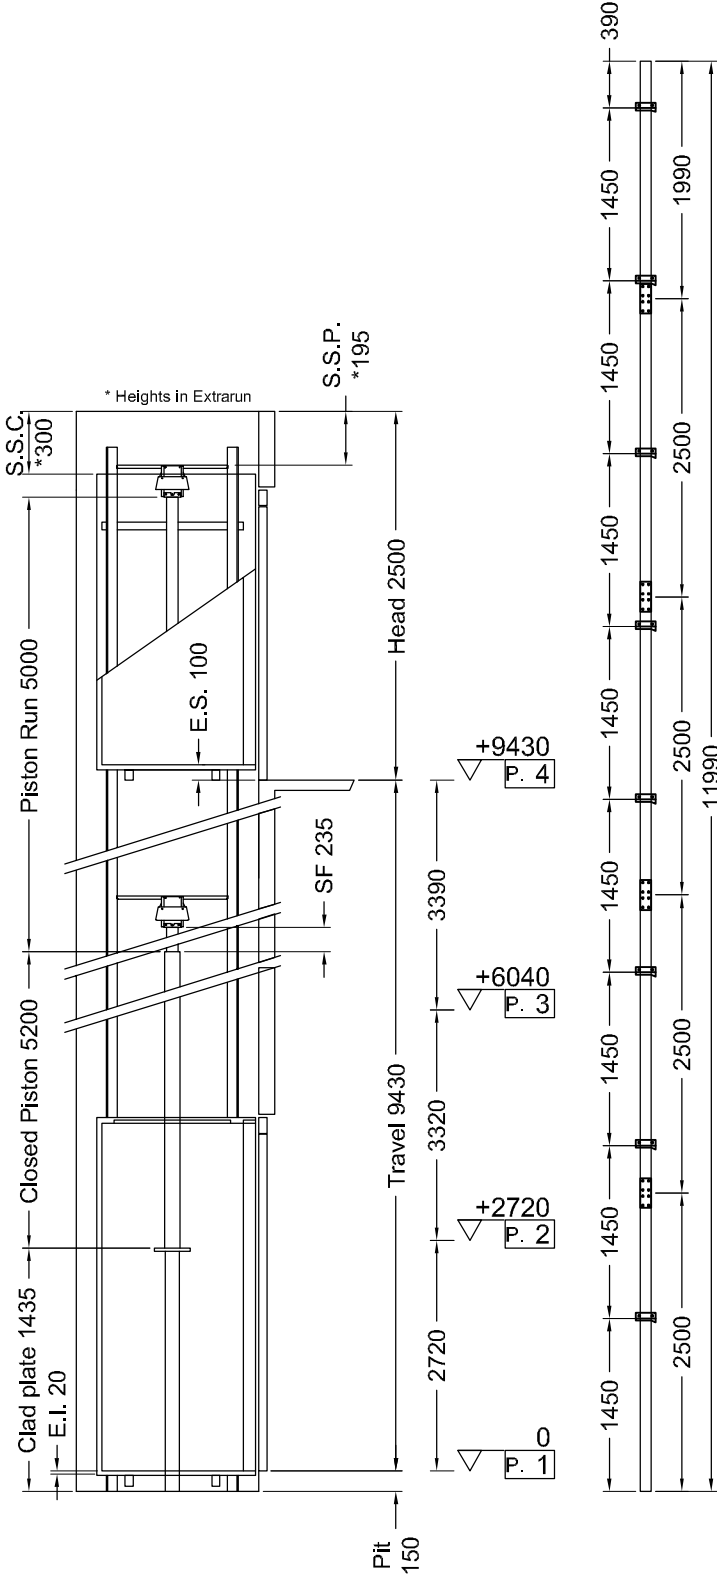

Indirect Installation	Speed 0,3 m/s	21/04/09 15.32	(V.020)
------------------------------	----------------------	----------------	---------

THRUST DURING NORMAL OPERATION				THRUST OF SAFETY DEVICE INTERVENT.			
P	(N)	12868		P	(N)	910	
N	(N)	1074		N	(N)	8742	
F1	(N)	1837		F1	(N)	3061	
F2	(N)	434		F2	(N)	723	

SPACES		PRESSURES		
E.I.	Extrusion below cabin (mm)	20	Max static pressure (bar)	40,87
E.S.	Extrusion above cabin (mm)	100	Min static pressure (bar)	23,02
SF.	Piston extraction (mm)	235	Overpressure limit (bar)	57,22
S.S.P.	Piston/head (mm)	195	Residual pressure (bar)	2,37
S.S.C.	Cabin/head (mm)	300		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	Start 96SLE	Runners	T70-2A
Capacity (l/min)	35	Brackets	(Nr) 8
Motor (V)	MF220V	Cables	9 mm 6-(1+9+9)
Power (Kw)	3	Cables lenght (mm) 2 x	14500
Piston	Start	Min actual breaking load (N)	42100
	(ø) 70x7,5x5000		
Opt. oil position	basso		
Tubing	Start		
Tubing lenght (mm)	8000		
Min hydraulic oil (L)	65		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	Start Elevator	1/2" 03026/01;03026/02	IMQ CA50.00526
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	1	Away from shaft (mm)	4000
Cables enter in shaft: Side	C		

CABIN		CABIN ACCESSORIES	
Panels	Inox BA (Lucido)	Handrail	INOX LUCIDO, Lat C
Finishes	Inox BA (Lucido)	Mirror	Lat C, D
Oper. panel	A COLONNA		
Floor	a carico Cliente		
Roof	FARETTI-Inox BA (Lucido)		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double Insertion
Guides dimension 2.5 m
Manual pump
Manostat
Double speed
Automatic control
Reinforced arcade
Handles CASPIM
Full height Infra-red curtain
Piston in 2 pieces

LE INFORMAZIONI CONTENUTE NEL PRESENTE DISEGNO SONO INTEGRATE DAL MANUALE OPERE MURARIE.

	Disegno Definitivo	1° STESURA
	L. Del Bianco	21/04/09
Disegno Definitivo		
SCALE	SHEET	
OUT OF SCALE	2/2	