


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	WINDOW	GLASS	ACCESSORIES	C1	C2	PM	PE
1 2 3			Standard Rust-proof (Flat)	2000	2100	Absent				X		

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

**Automatic Control
2008**

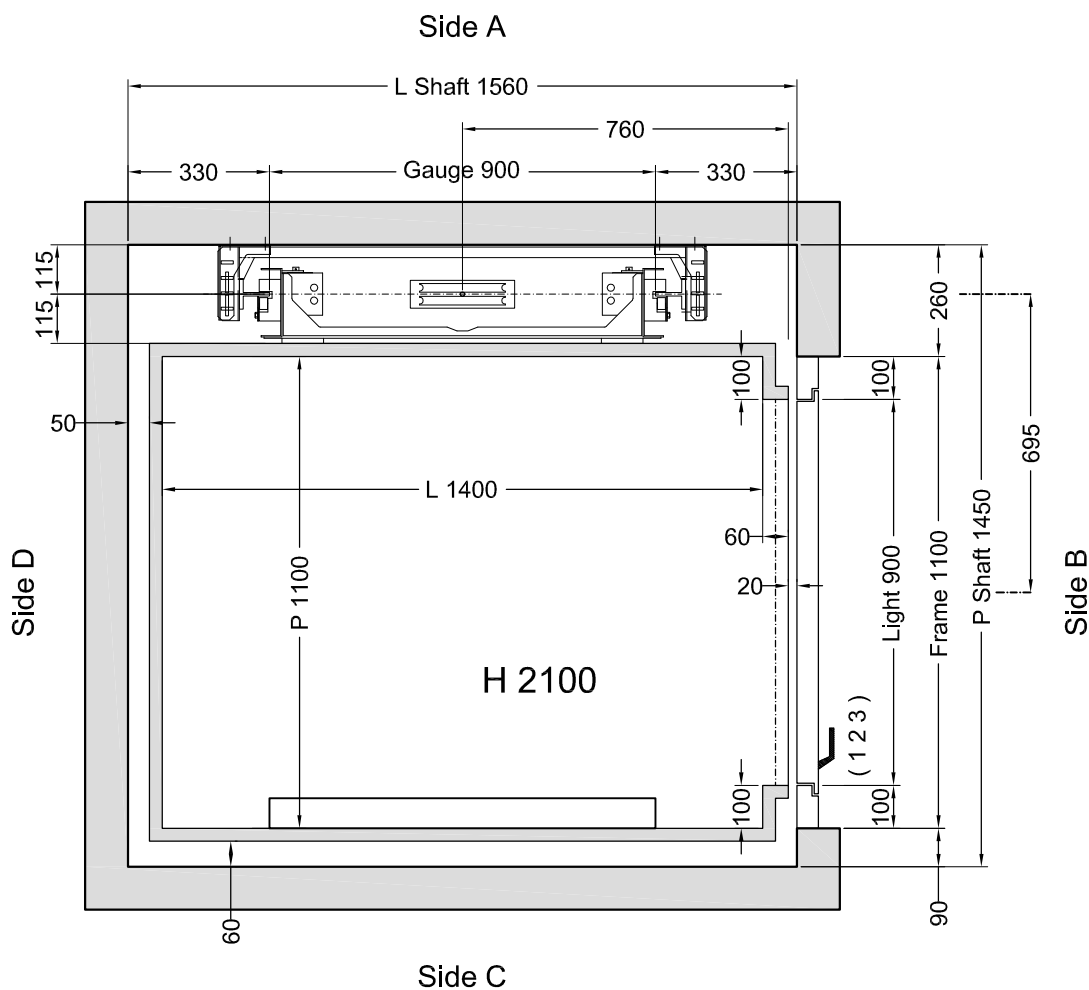

Pavimento a carico Cliente: Dim. **1430 (L) x 1100 (P)** Spes. **15 mm** Peso: **50 Kg**
(EN)


Stops: 3 - Doors: 3

Shaft on **Masonry (Muratura)**

VERSIONS	Description	Designer	Date	Final Design Drawings	
					SHEET 1/2
	Corsa; Fossa; Locale Macchine.	L.Del Bianco	12/07/2010		SCALE 1:12.5
	Porte antiruggine cieche; Pulsantiera orizzontale con corrimano Lato C.	L.Del Bianco	12/07/2010		
		Disegno Definitivo L.Del Bianco	1° STESURA 16/09/09		
		CAPACITY 350 Kg	AREA m ² 1,54	CAPACITY 	

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Doppia velocità
- Manovra Automatica 2008
- Arcata rinforzata
- Maniglie CASPIM
- Fotocellula tutta parete
- Arresti fissi in fossa
- Prolunga Cavo PCA

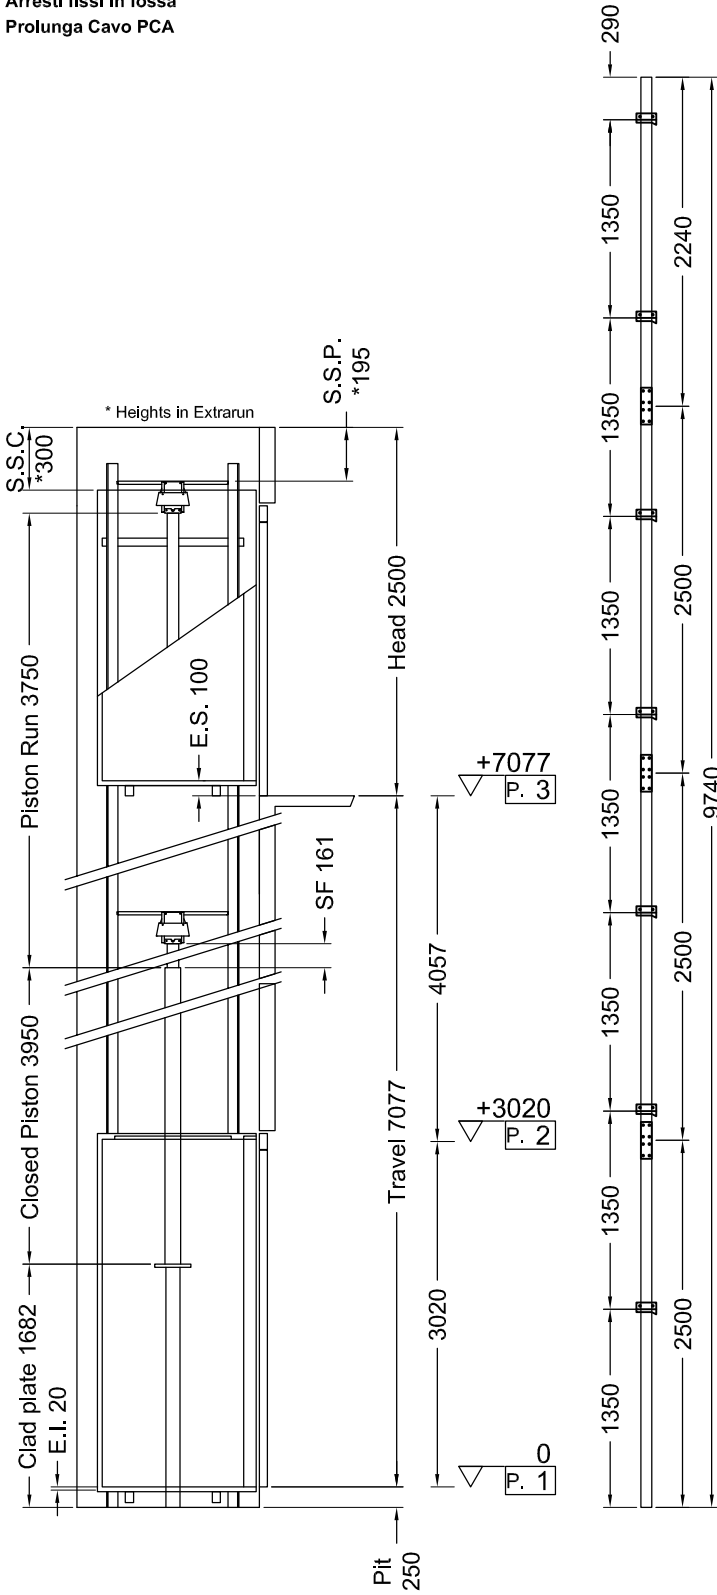

Indirect Installation	Speed 0,3 m/s	12/07/10 08.48 (V.2204)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	11898	P	(N)	638
N	(N)	873	N	(N)	8167
F1	(N)	1755	F1	(N)	2925
F2	(N)	434	F2	(N)	723

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	38,1
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	20,26
SF.	Piston extraction (mm)	161	Overpressure limit (bar)	53,35
S.S.P.	Piston/head (mm)	195	Residual pressure (bar)	1,66
S.S.C.	Cabin/head (mm)	300		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	Start 96SLE	Runners	T70-2A
Capacity (l/min)	35	Brackets	(Nr) 7
Motor (V)	MF220V	Cables	9 mm 6-(1+9+9)
Power (Kw)	3	Cables lenght (mm) 2 x	12100
Piston	Start Elevator(ø) 70x5x3750	Min actual breaking load (N)	42100
Opt. oil position	basso		
Tubing	Start		
Tubing lenght (mm)	6000		
Min hydraulic oil (L)	--		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	Start	1/2"03026/01;03026/02	IMQ CA50.00526
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	1	Away from shaft (mm)	2000
Cables enter in shaft: Side	C		

CABIN	CABIN ACCESSORIES
Panels	Lamiera zincata
Finishes	Inox Scotch Brite
Oper. panel	HORIZONTAL
Floor	a carico Cliente
Roof	FARETTI-Bianco A1

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
 - Guides dimension 2.5 m
 - Manual pump
 - Manostat with overweight signal
 - Double speed
 - Automatic control 2008
 - Reinforced arcade
 - Handles CASPIM
 - Full height infra-red curtain
 - Pit stop bow
 - Prolunga Cavo PCA

Le informazioni contenute nel presente disegno sono integrate dal manuale opere murarie.

	CLIENT LIFT SHOP	Disegno Definitivo L. Del Bianco	1° STESURA 16/09/09
	PLACE OF INSTALLATION	Final Design Drawings	
		SCALE OUT OF SCALE	SHEET 2/2