

FLOOR DOOR


Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
1			Standard RAL 7022 *	2000	2100	RAL 7022 *	Panoramic **	Transparent	PM-Access Keypad-Caspim
2			Standard RAL 7022 *	2000	2100	RAL 7022 *	Panoramic **	Transparent	Caspim
	3		Standard RAL 7022 *	2000	2100	RAL 7022 *	Absent		PM - No Handles - Return §
	4		Standard Rust-proof *	2000	2100	Rust-proof *	Absent		Caspim

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(*) Smooth finish - Semi Gloss - No raised edges

(§) Return Button to Level 1

(**) Aluminium around glass powder coated same as door colour

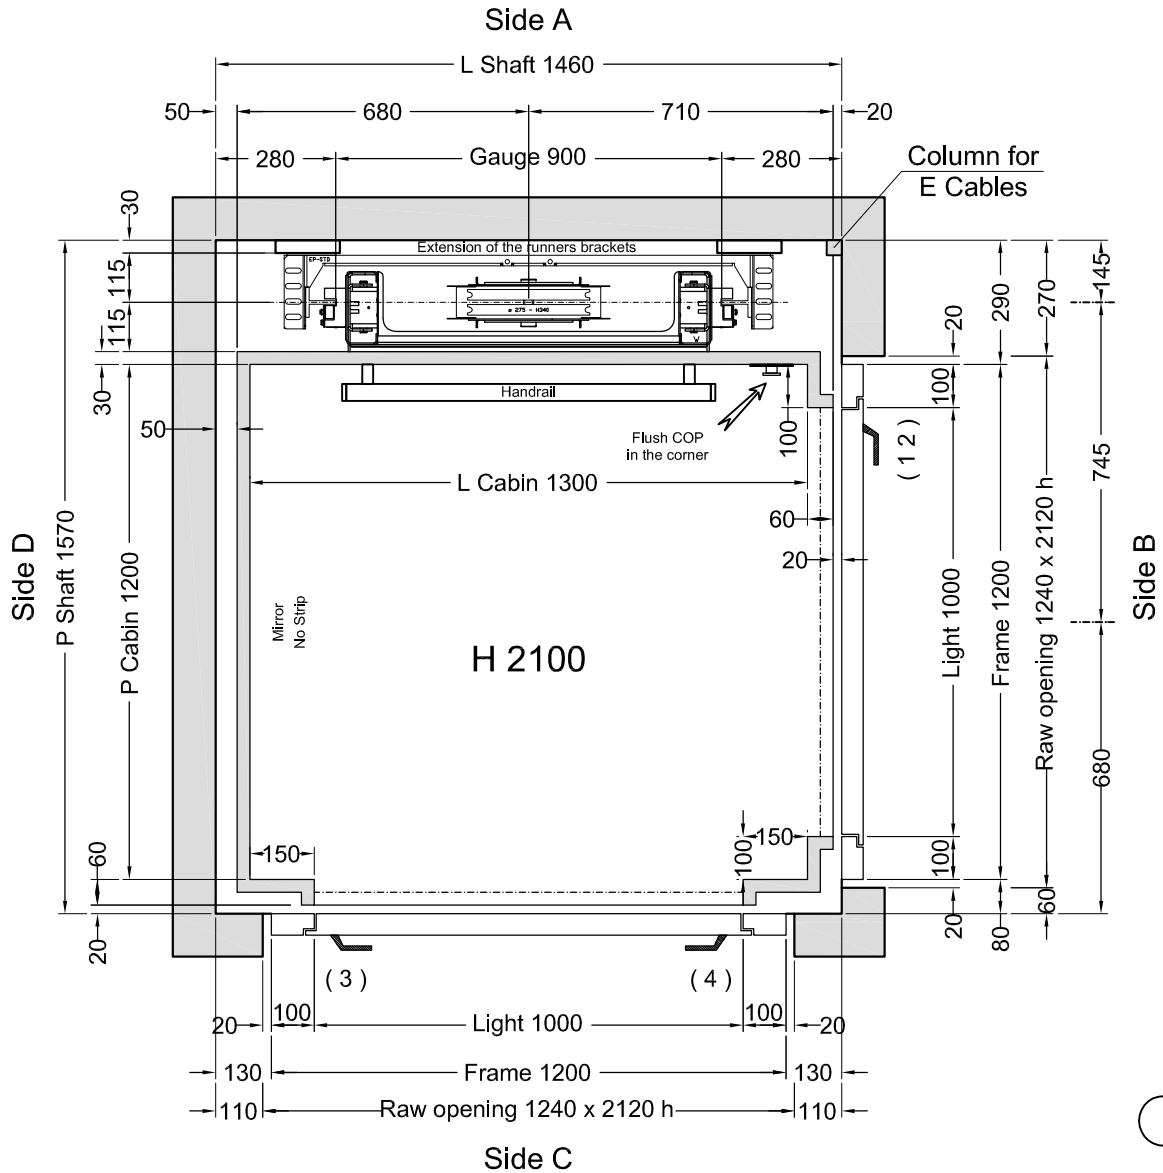


Snap 0001

Feasibility n° 1959 - Return Button

Stops: 4 - Doors: 4

Shaft in Masonry (Muratura)

Customer own flooring: Dimensions 1330 (L) x 1230 (P) thks 20 mm Weight: 50 kg

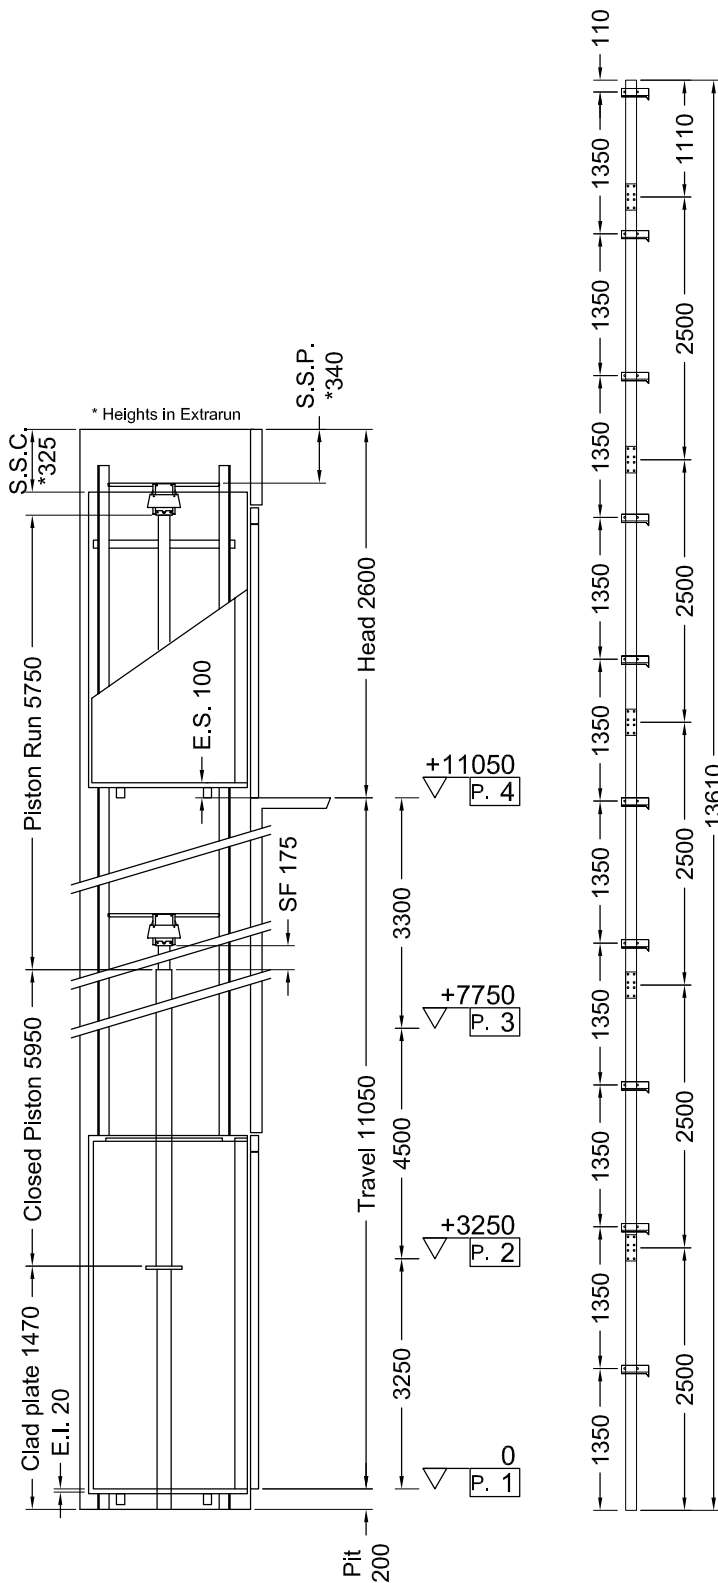

Indirect Installation Speed 0,28 m/s 10/04/15 11.35 (V.2852)

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12987	P	(N)	914
N	(N)	1317	N	(N)	9060
F1	(N)	1862	F1	(N)	3104
F2	(N)	376	F2	(N)	627

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	31,57
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	17,91
SF.	Piston extraction (mm)	175	Overpressure limit (bar)	44,2
S.S.P.	Piston/head (mm)	340	Residual pressure (bar)	1,82
S.S.C.	Cabin/head (mm)	325		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	43	Guide rails	70x70x9
Motor (V)	MF230V	Brackets	(Nr) 10
Power (Kw)	2,9	Ropes	Ø 11 mm 6-(1+9+9)
Nominal current (A)	27	Cables length (mm) 2 x	17000
Piston	START SL (ø)80x5x5750	Min actual breaking load (N)	70700
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - FD 3/4"		
Tubing length (mm)	5000		
Min hydraulic oil (L)	70		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0326	CA50.00526
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	1	Length of the hose travel	1000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	ARPA 3318 VG TX	Mirror - No Strip	Side D
Finishes	Inox Scotch Brite	Outside covering	Roof
Oper. panel	VERTICAL - Flush Corner A-B	Outside finishing	F41PPS
Floor	By Customer	Handrail	Inox S.B., Slide A
Ceiling	SPOTS LED - Blanco A1		

OTHER ACCESSORIES
ONE Enabling key for the cabin button pad, double insertion for Levels 2 and 4
Guides dlmension 2.5 m
Piston In 2 pcs
Manual pump
Manostat with overweight signal
Two speed
Return to the false floor after adjustable time
Handles CASPIM: Levels 1, 2 and 4
Doors without handles (and without holes for handles): Level 3
Telephone by Lift Shop
Full height Infra-red curtain V2
Pit stop bow
Floor Button Pad fixed to the Wall: Levels 1 and 3
Roof covering
Automatic Control 2011
Access Keypad at Level 1 - Return Button at Level 3