


Accessori:

- Chiave abilitazione pulsantiera di cabina a doppia estrazione
- Predisposizione Fotocellula tutta parete
- Chiave di abilit. Pulsantiera di piano D.E.: 1 2 3 4
- Pistone in due pezzi
- Barre guide da 2,5 m
- Impianto con pressostato
- Portata >300 kg
- Pompa a mano
- Arcata rinforzata – Mensola tipo UK
- Manovra Automatica
- Velocità Nominale 0,30 m/s


THE LIFT HAS VALUE ONLY FOR THE VERTICAL HEIGHTS SHOWN

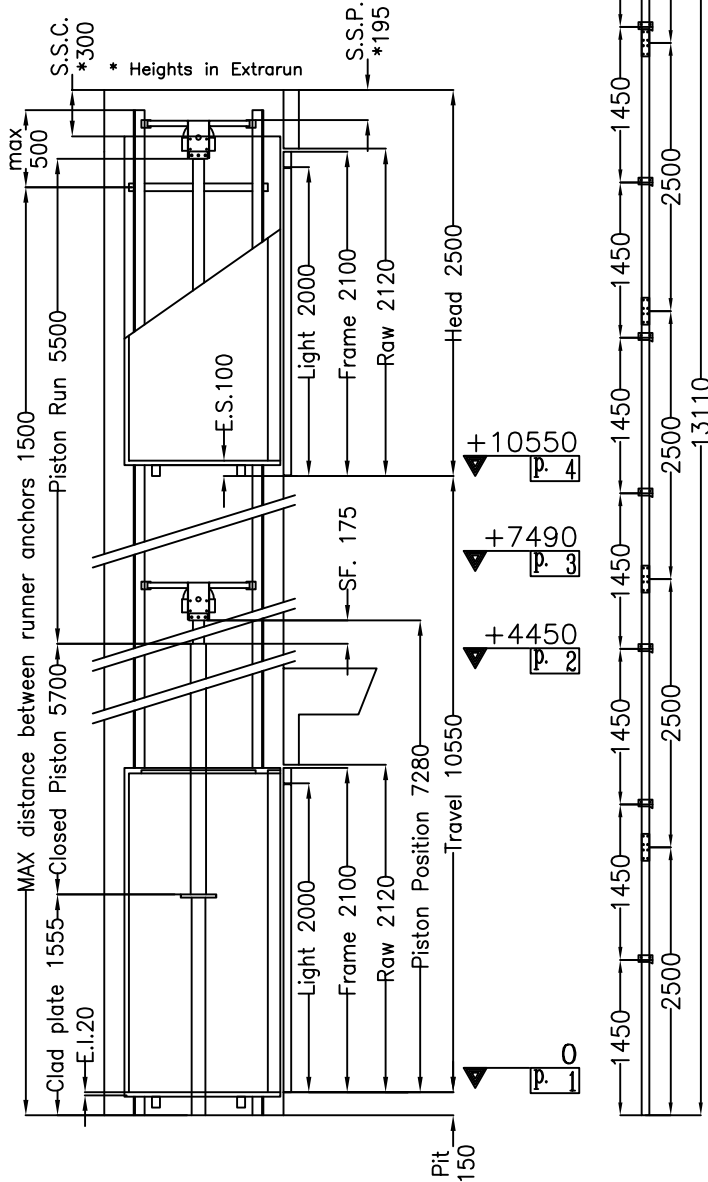

Indirect Installation Ver. 20.07.07

Thrust during normal operation		12.03.08 – 11:33
P	(N) 10475	
N	(N) 1169	
Fx	(N) 1289	
Fy	(N) 395	

Thrust of safety device intervention		
P	(N) 967	
N	(N) 7093	
Fx	(N) 2403	
Fy	(N) 0	

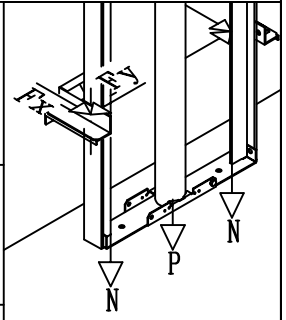

Pressures		
max static pressure	(bar) 33,78	
min static pressure	(bar) 15,94	
overpressure limit	(bar) 47,29	
residual pressure	(bar) 2,51	

Spaces		
extrarun below cabin E.I.	(mm) 20	
extrarun above cabin E.S.	(mm) 100	
piston extraction SF.	(mm) 175	
piston/head S.S.P.	(mm) 195	
cabin/head S.S.C.	(mm) 300	

Hydraulic unit		
piston	MORIS 9130	
diam. (mm)	70x7,5	
total piston run (mm)	5500	
closed piston (mm)	5700	
opt. oil position	basso	
central unit	MORIS CM3A	
capacity (l/min)	35	
motor (V)	220	
power (Hp)	4,5	
tubing	ø1"1/4 R2 AT FD+F90° M45X2	
length (mm)	11000	
hydraulic oil		
min. litres (L)	100	

Mechanical parts		
runners	T70/2A	
length (mm)	13110	
brackets (qt.)	9	
cables	9 mm (S 114+1)	
length (mm)	2 x 15600	
Minimum actual breaking load (N)	40100	
zinc clad plate	88.9	
length (mm)	1555	
arcade	AEP3 scart.900 mens.131 mont.2100 cil. 70	
Pilot Cable	(mm) 24000	

Cabin		
panels	Inox Scotch Brite	
finishes	Inox Scotch Brite	
floor rivest.	Cliente 15 mm	
operator panel	Inox Scotch Brite – Verticale Cod.T7	
ceiling	FARETTI Inox Scotch Brite	

Lobby doors:	<input checked="" type="checkbox"/> All	Covered anodized aluminium
	<input type="checkbox"/>	Panoramic Milk White Glass
		Tubular handles model Caspim – Maniglie Caspim

- Accessories:**
- Activation Key for Cabin Button Panel with Double Insertion
 - Preparation for Full Height Infra-red Curtain
 - Activation Key for Floor Button Pad D.I.: 1 2 3 4
 - Piston in 2 pieces
 - Guides bars dimension 2,5 m
 - Installation with Pressostat
 - Capacity >300 kg
 - Hand Pump
 - Reinforced Arcade – Bracket type UK
 - Automatic Control
 - Nominal Speed 0,30 m/s

Check that the characteristics given in the technical drawing are in accordance with the order form

Disegno Definitivo		VIEW	Disegno Definitivo	DATE OF MODIFICATIONS
			Luca Del Bianco	
Modifications	d .			
	c .			
	b Pistone in 2 pezzi.			12.03.2008
	a Corsa da 10,54 a 10,55 m; v=0,30 m/s; Vetro Porte; Correzione: invertita cernieratura.			12.03.2008
DATE	SHEET	CAPACITY: 350 kg		Security Devices
05/11/07	2/2			Safety Gear TUV AFV515
				Manufacturer: PFB – BP1
				Block Valve IMQ IO222
				Manufacturer: MORIS – 0825/P
				Key Locks IMQ IO110
				Manufact.: Tieffe-Tieffe 2000