



FLOOR DOOR

| Side B | Side C | Side D | VERSION | H LIGHT | H FRAME | WINDOW | GLASS | ACCESSORIES | C1 | C2 | PM | PE |
|--------|--------|--------|-------------------------------------|---------|---------|-----------|-------------|-------------|----|----|----|----|
| 1 2 3 | | | Landing doors and frames: Similinox | 2000 | 2100 | Panoramic | Transparent | | | X | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

Eifo 2
Automatic
Control 2010
0.30 m/s

Door threshold

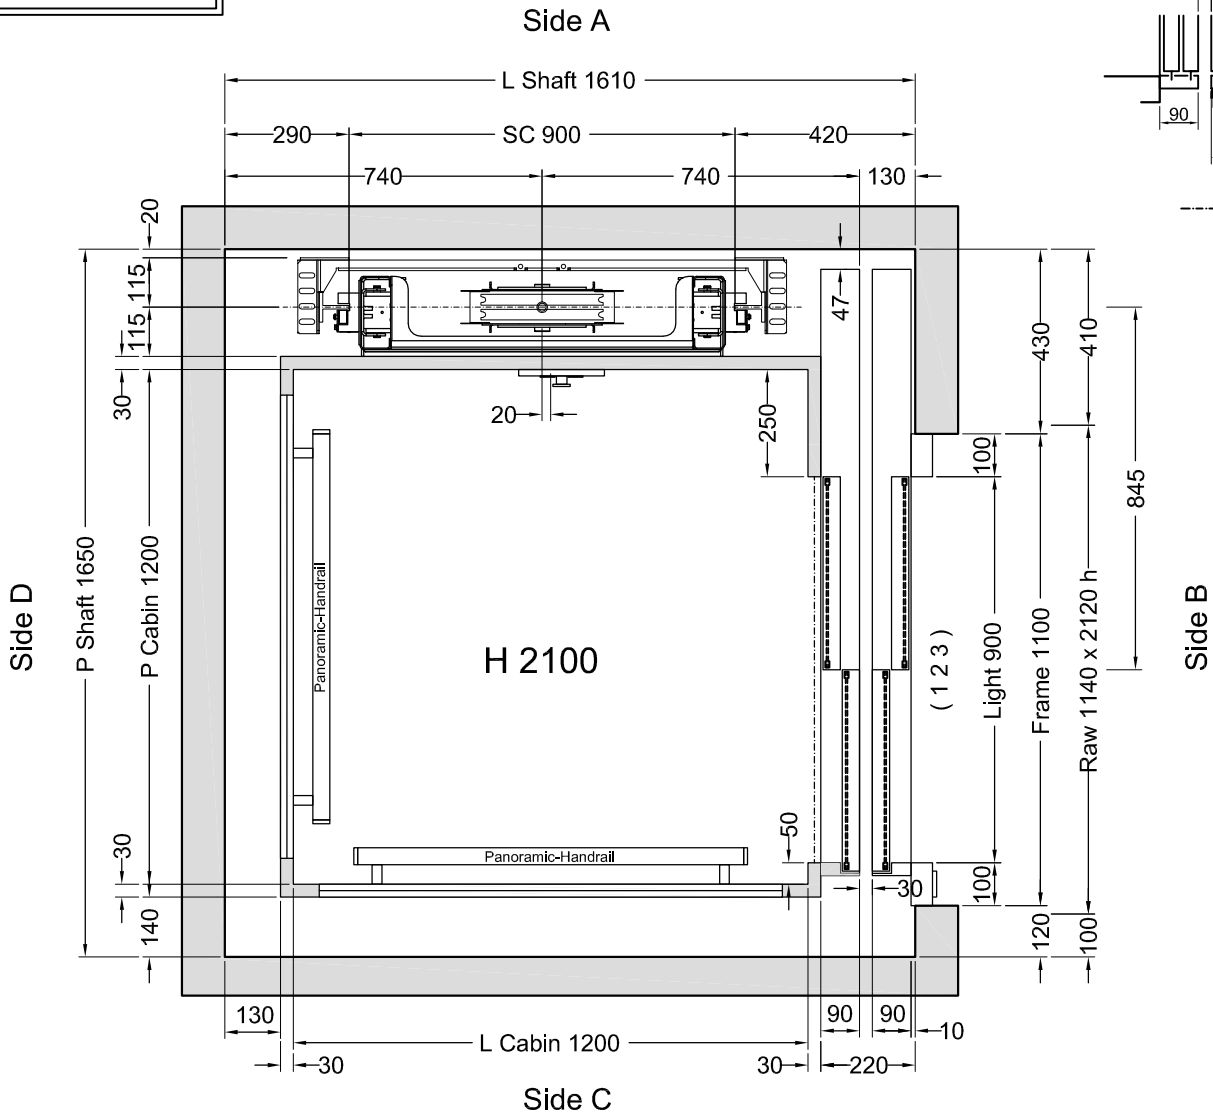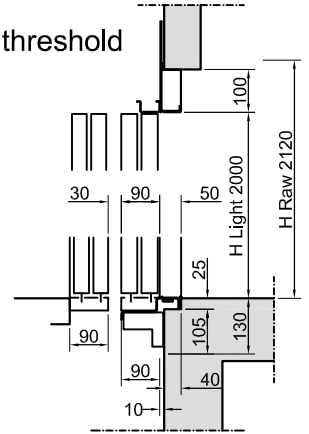

Stops: 3 - Doors: 3

Shaft in **Masonry (Muratura)**


Customer own flooring: Dimensions **1230 (L) x 1200 (P)** thks **15 mm** Weight: **25 kg**

| | VERSIONS | Description | Designer | Date | Final Design Drawings |
|--|----------|---|---------------------------------------|------------------------|-------------------------------|
| | | | | | |
| | | | | | SHEET DIMENS. A3 |
| | | Porte di cabina e di piano con vetro; Rivest. Esterno Similinox; Locale macchine. | L.Del Bianco | 13/09/2012 | SCALE 1:12.5 |
| | | Rifacimento con nuovi rilievi. | L.Del Bianco | 18/01/2012 | CAPACITY 350 kg |
| | | | Final Design Drawings L.Del Bianco | 1° STESURA 19/09/11 | |



ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Doppia velocità
- Ritorno piano basso con tempo regolabile
- Dispositivo falsa testata
- Telefono
- Fotocellula tutta parete
- Manovra Automatica 2010
- ELFO 2

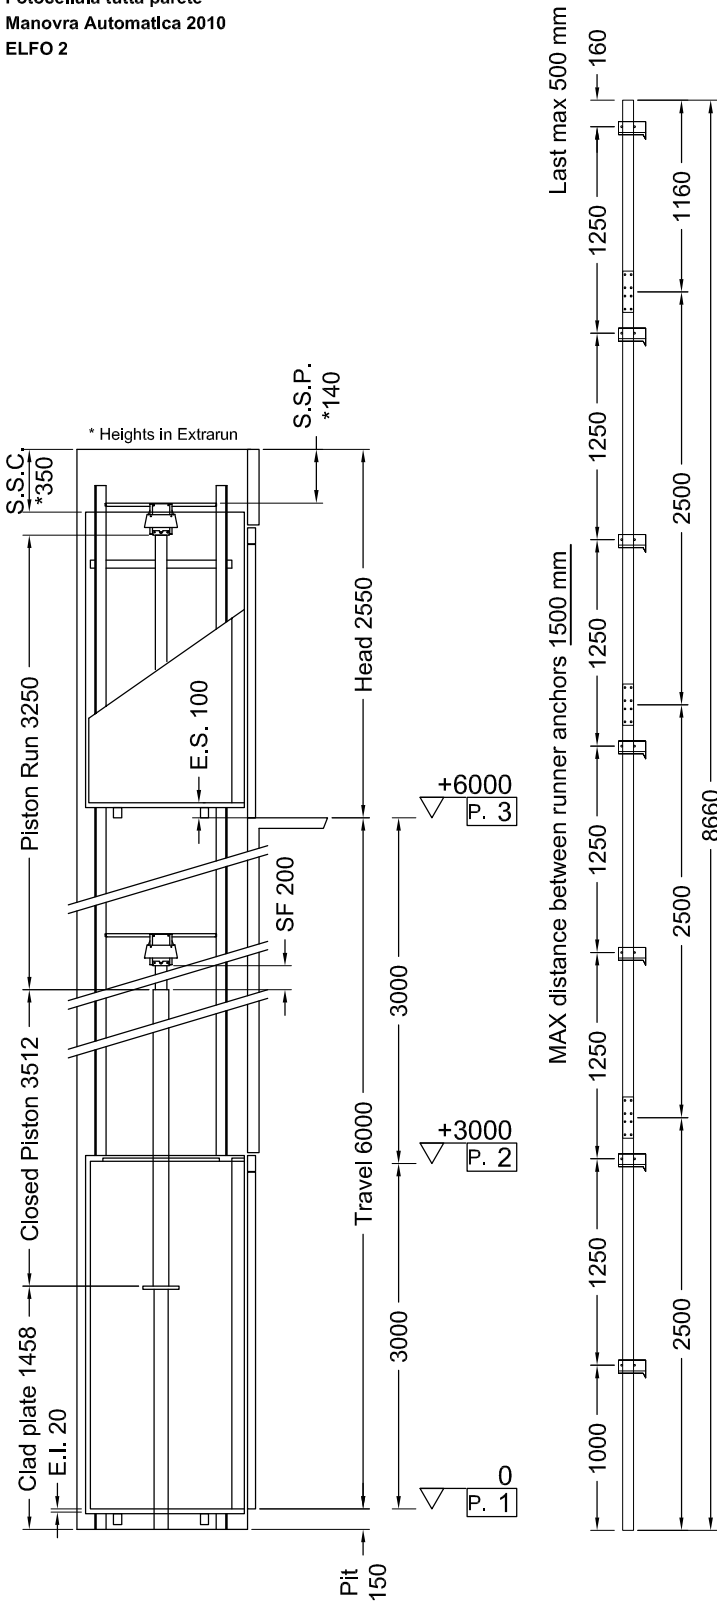

| Indirect Installation | | Speed 0,3 m/s | 13/09/12 11.45 (V.2752) | | |
|--------------------------------|-----|----------------------|------------------------------------|-----|------|
| THRUST DURING NORMAL OPERATION | | | THRUST OF SAFETY DEVICE INTERVENT. | | |
| P | (N) | 12794 | P | (N) | 648 |
| N | (N) | 773 | N | (N) | 8654 |
| F1 | (N) | 1727 | F1 | (N) | 2879 |
| F2 | (N) | 302 | F2 | (N) | 504 |



| MACHINERY LOCATION | | | |
|-----------------------------|---|---------------------------|-----------|
| At floor | 1 | Length of the hose travel | 3000 (mm) |
| Cables enter in shaft: Side | A | | |

| CABIN | | CABIN ACCESSORIES | |
|-------------|--|-------------------|----------------------------|
| Panels | Similinox F12PPS | Panoramic | Lati C,D |
| Finishes | Inox Scotch Brite | Handrail | INOX S.B., Lati C,D |
| Oper. panel | VERTICAL (like finishes stnd) | Riv. Est. | Side C,D |
| Floor | By Customer | Riv. Esterno | Similinox F12PPS |
| Roof | SPOTS LED - Blanco A1 | | |
| Cabin Doors | Side B: Sliding 2 Doors, <u>Panoramic transparent and Inox Scotch Brite</u> | | |

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
 - Guides dimension 2.5 m
 - Manual pump
 - Manostat with overweight signal
 - Double speed
 - Return to the lower floor after adjustable time
 - False head device
 - Telephone
 - Full height infra-red curtain
 - Automatic control 2010
 - ELFO 2

The approval of this plan serves also as confirmation of delivery of the masonry manual rev.3.

| | | | |
|--|--|------------------------------|------------|
| | | Final Design Drawings | 1° STESURA |
| | | L. Del Bianco | 19/09/11 |
| | | Final Design Drawings | |
| | | SCALE | SHEET |
| | | OUT OF SCALE | 2/2 |