


## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
G 1 2	B		Not Supplied by EP	2000	2110				C2 - <u>Icaro Display</u>

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

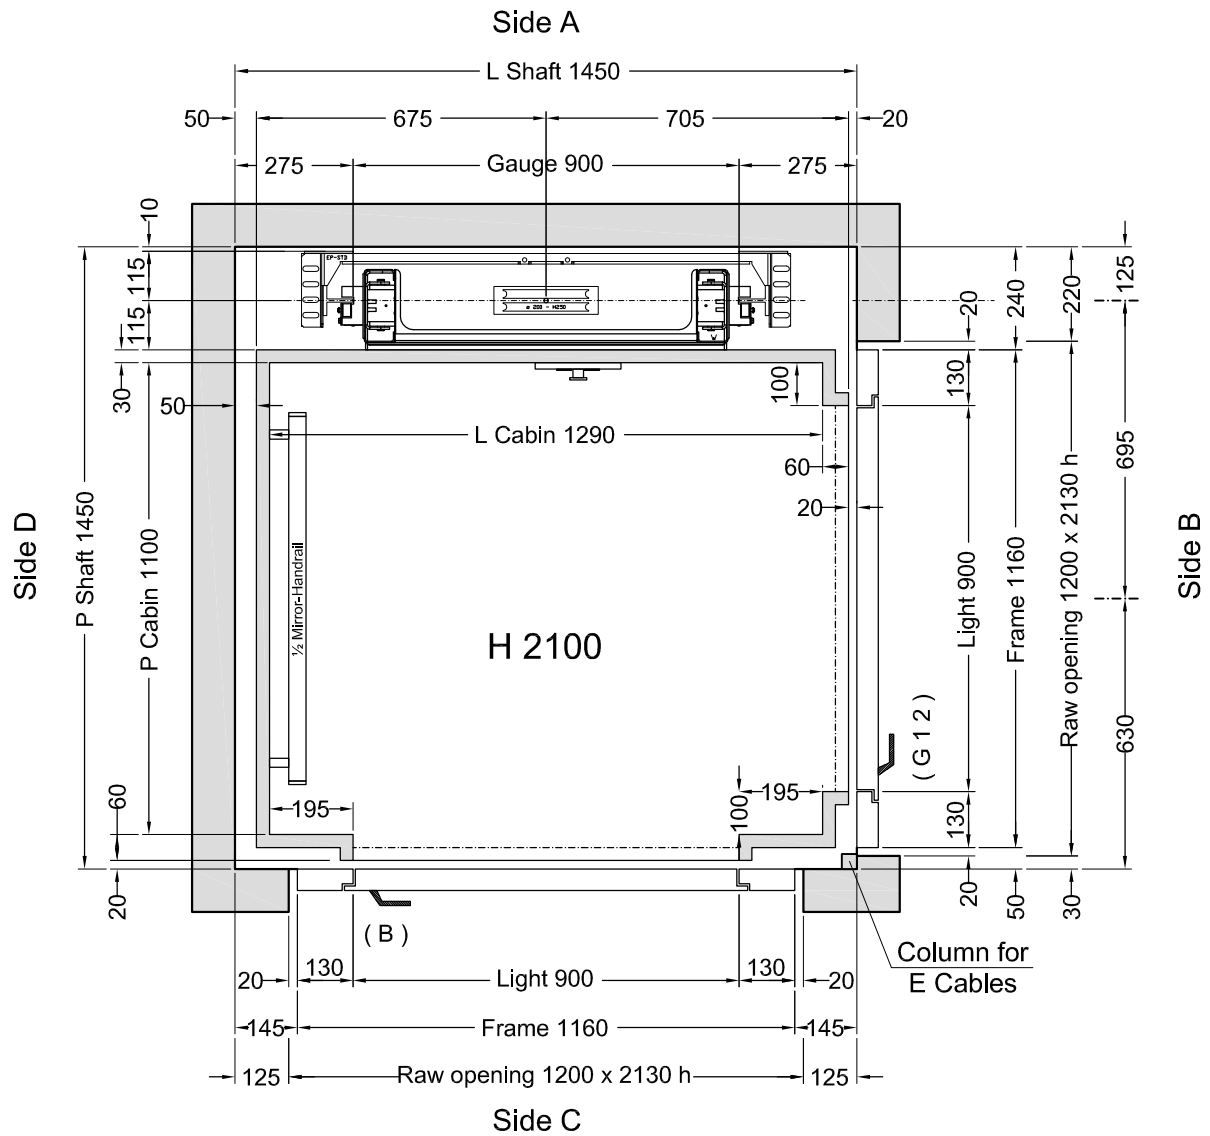

2  
1  
G  
B

**Stops: 4 - Doors: 4**


Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1320 (L) x 1130 (P)** thks **20 mm** Weight: **50 kg**

OPDEP	Description	Designer	Date	Final Drawings	
				Model <b>ELFO</b>	SHEET 1/2
		L. Del Bianco	07/07/2014	 <b>SCALE</b> 1:12.5	SHEET DIMENS. <b>A3</b>
		Colamarino	10/03/2014		
		Final Drawings L. Del Bianco	1° STESURA 17/07/14	CAPACITY	CAPACITY
		CAPACITY <b>300 kg</b>	AREA m <sup>2</sup> <b>1,42</b>		

**ACCESSORI:**

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Ritorno Piano G con tempo regolabile
- Maniglie CASPIM
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Allimentazione motore 400V
- Display ICARO In cabina
- Manovra Automatica 2011
- Pulsantiera cabina con foro supplementare (25x25 mm)
- Pulsanti Cabina: B, G, 1, 2

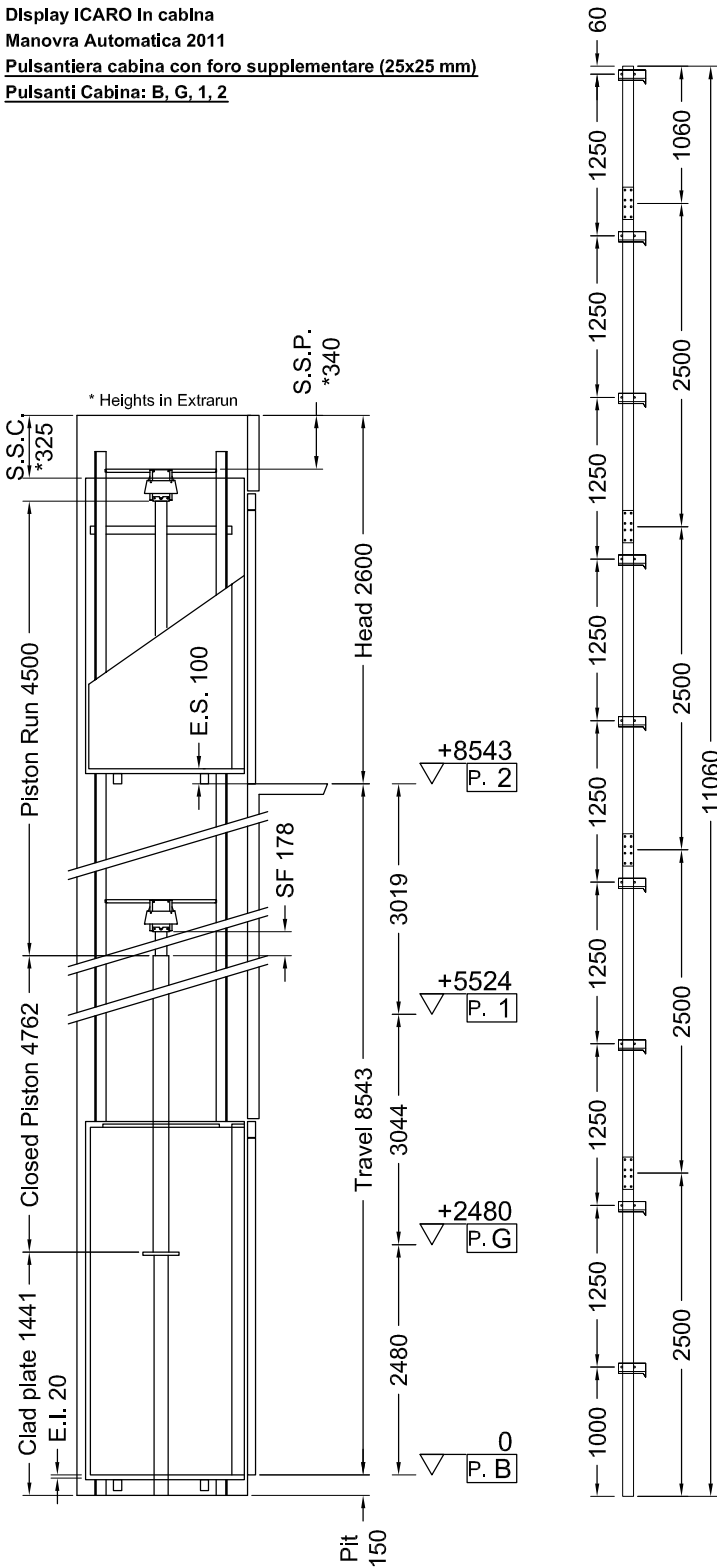

Indirect Installaton	Speed 0,3 m/s	17/07/14 14.36 (V.2846)
----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	11649	P	(N)	697
N	(N)	1004	N	(N)	8073
F1	(N)	1587	F1	(N)	2645
F2	(N)	340	F2	(N)	567

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	36,13
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	20,84
SF.	Piston extraction (mm)	178	Overpressure limit (bar)	50,59
S.S.P.	Piston/head (mm)	340	Residual pressure (bar)	1,81
S.S.C.	Cabin/head (mm)	325		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	35	Runners	T70-2A
Motor (V)	TF400V	Brackets	(Nr) 9
Power (Kw)	2,9	Cables	Ø 9 mm 6-(1+9+9)
Corrente (A)	11	Cables lenght (mm) 2 x	14000
Piston	START Homø 70x5x4500	Min actual breaking load (N)	47300
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing lenght (mm)	7000		
Min hydraulic oil (L)	53		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	B	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	F41PPS	½ Mirror	Side D
Finishes	Inox BA mecc.	Handrail	Inox Lucido, Side D
Oper. panel	VERTICAL ** (Like finishes)		
Floor	By Customer		
Ceiling	LABIRINT - Led Strlps - F41PPS		
(**) C.O.P. with additional cutout (25x25 mm)			

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dlmension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
<u>Return to Level G after adjustable time</u>
Handles CASPIM
<u>Telephone by Lift Shop</u>
Full height infra-red curtain V2
Power supply 400V
ICARO dlsplay In cabln
Automatic Control 2011
<u>C.O.P. with additional cutout (25x25 mm)</u>
<u>Cabln Buttons: B, G, 1, 2</u>

