


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	WINDOW	GLASS	ACCESSORIES	C1	C2	PM	PE
1A			Landing Doors and Frames: Galvanized	2000	2100	Absent				X		
		1B 2 3	Landing Doors and Frames: Inox S.B.	2000	2100	Absent				X		

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

Elfo 2
Automatic
Control 2010
0.30 m/s

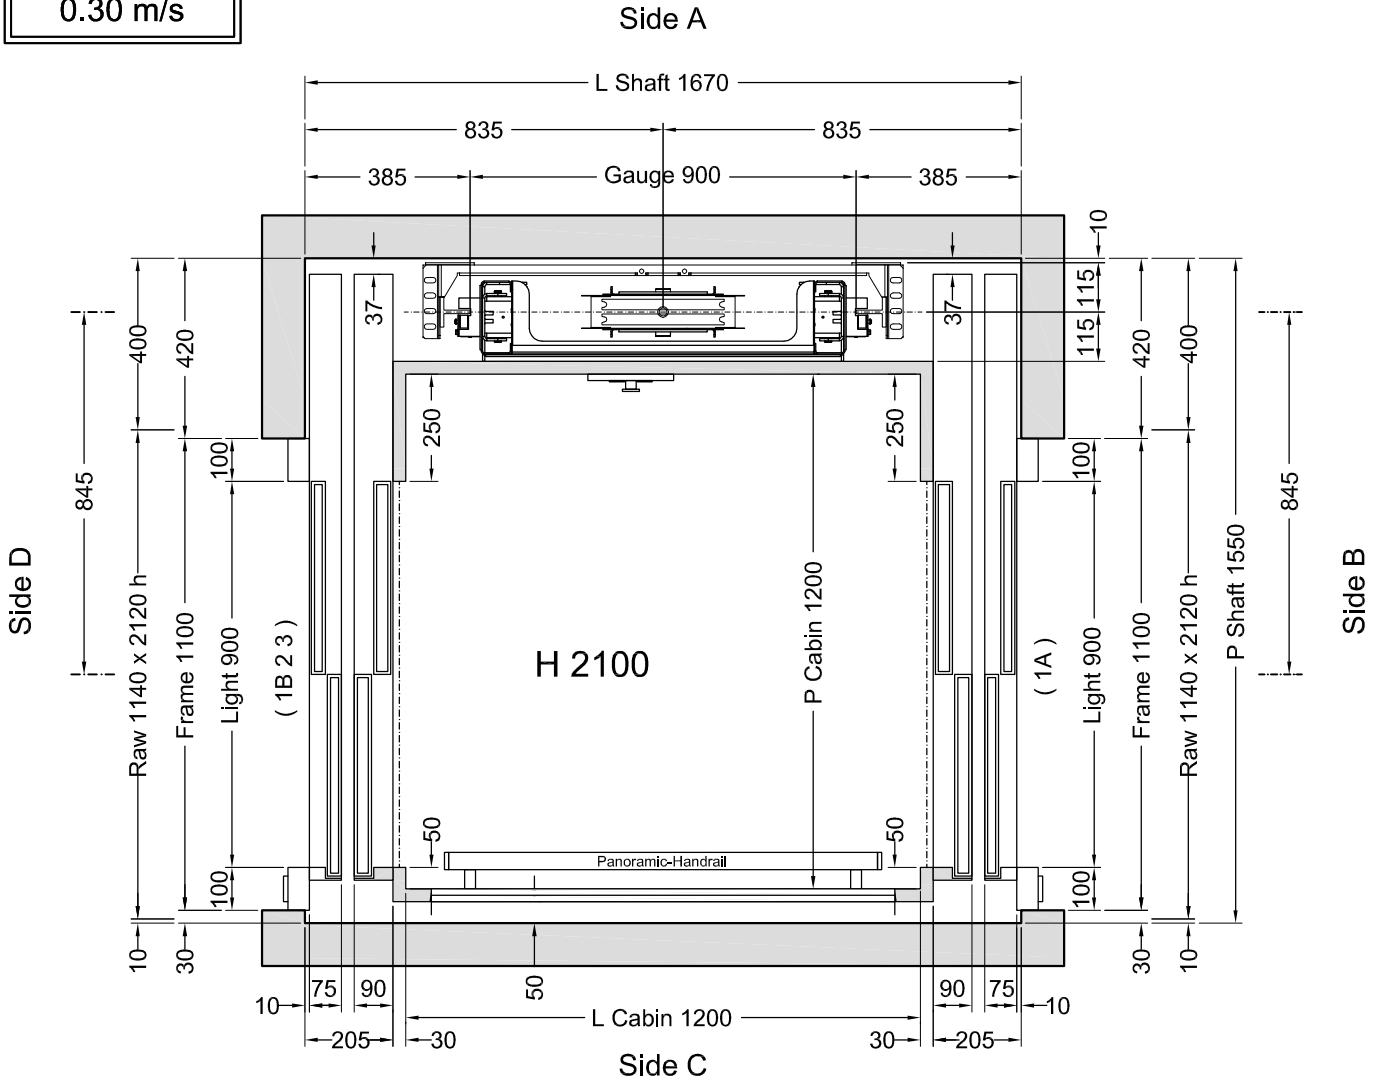

Feasibility n° 1700 - Floor 1: 2 Doors

Stops: 3 - Doors: 4


Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1260 (L) x 1200 (P)** thks **15 mm** Weight: **25 kg**

	VERSIONS	Description	Designer	Date	Final Design Drawings
		Cop con 1A e 1B.	L.Del Bianco	03/07/2012	
L Vano; Corsa; Testata; Porte TLX; Colori; Telefono.	L.Del Bianco	11/06/2012	SHEET DIMENS. A3		
		Final Design Drawings L.Del Bianco	1° STESURA 30/05/11	SCALE 1:12.5	
		CAPACITY 350 kg	AREA m ² 1,44	CAPACITY	

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Doppia velocità
- Ritorno al Piano 2 con tempo regolabile
- Dispositivo falsa testata
- Telefono
- Fotocellula tutta parete
- Manovra Automatica 2010
- Staffoni Ridotti
- ELFO 2

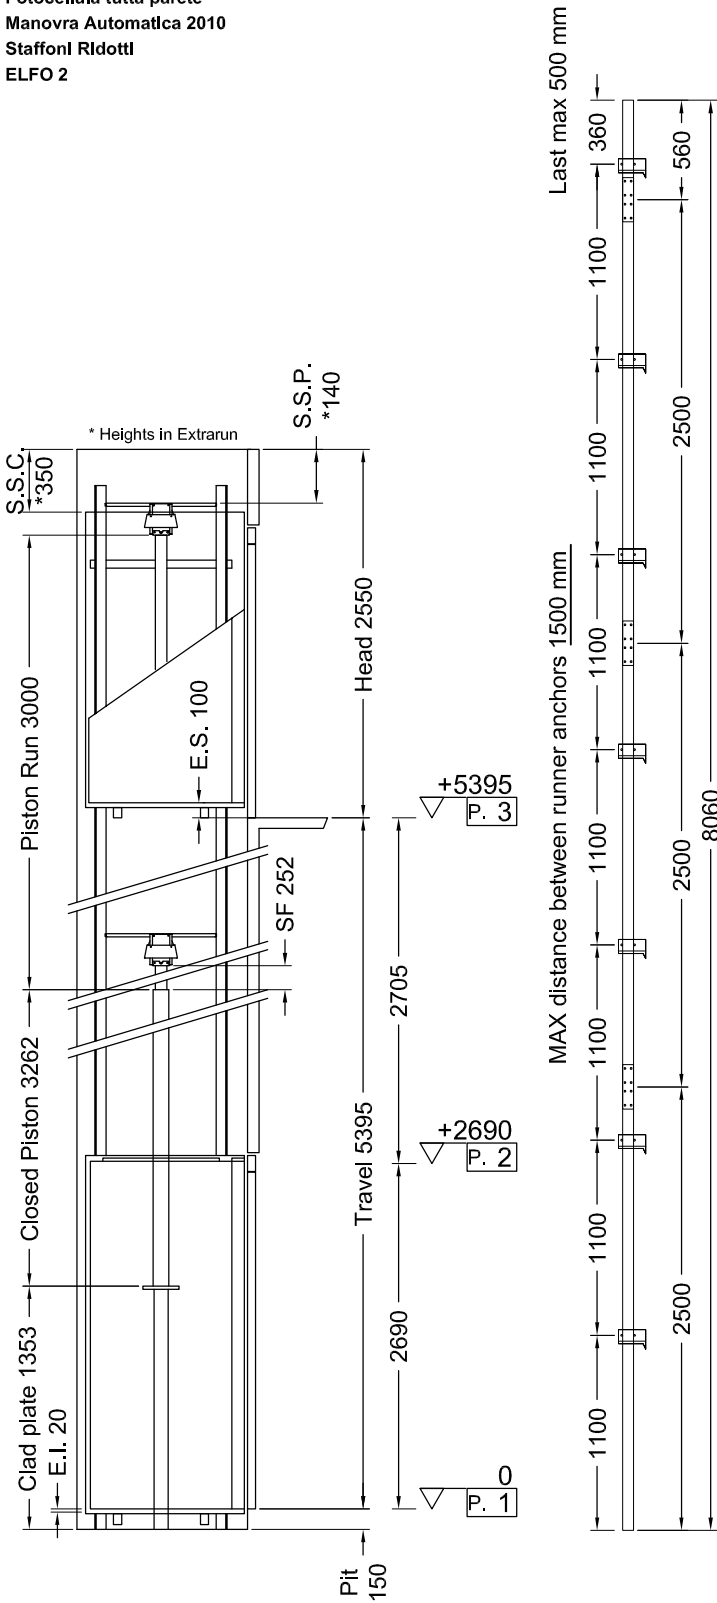

Indirect Installation		Speed 0,3 m/s	03/07/12 12.07 (V.2745)		
THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	13226	P	(N)	628
N	(N)	719	N	(N)	8908
F1	(N)	1789	F1	(N)	2982
F2	(N)	309	F2	(N)	516



MACHINERY LOCATION			
At floor	1	Length of the hose travel	5000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Galvanized sheet	Panoramic	Side C
Finishes	Inox Scotch Brite	Handrail	Inox S.B., Side C
Oper. panel	VERTICAL (with 1A and 1B)	Riv. Est.	Side C
Floor	By Customer	Riv. Esterno	Inox Scotch Brite
Roof	SPOTS LED - Inox Scotch Brite		
Cabin Doors	Side B: 2 Sliding Doors, Inox Scotch Brite Side D: 2 Sliding Doors, Inox Scotch Brite		

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
 - Guides dimension 2.5 m
 - Manual pump
 - Manostat with overweight signal
 - Double speed
 - Return to the Level 2 after adjustable time
 - False head device
 - Telephone
 - Full height infra-red curtain
 - Automatic control 2010
 - Reduced outriggers
 - ELFO 2

The approval of this plan serves also as confirmation of delivery of the masonry manual rev.3.

		Final Design Drawings	1° STESURA
		L. Del Bianco	30/05/11
		Final Design Drawings	
		SCALE	SHEET
		OUT OF SCALE	2/2