


## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	WINDOW	GLASS	ACCESSORIES	C1	C2	PM	PE
		1 2 3 4 5	EXCLUDED FROM DELIVERY	2000	2140					X		

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

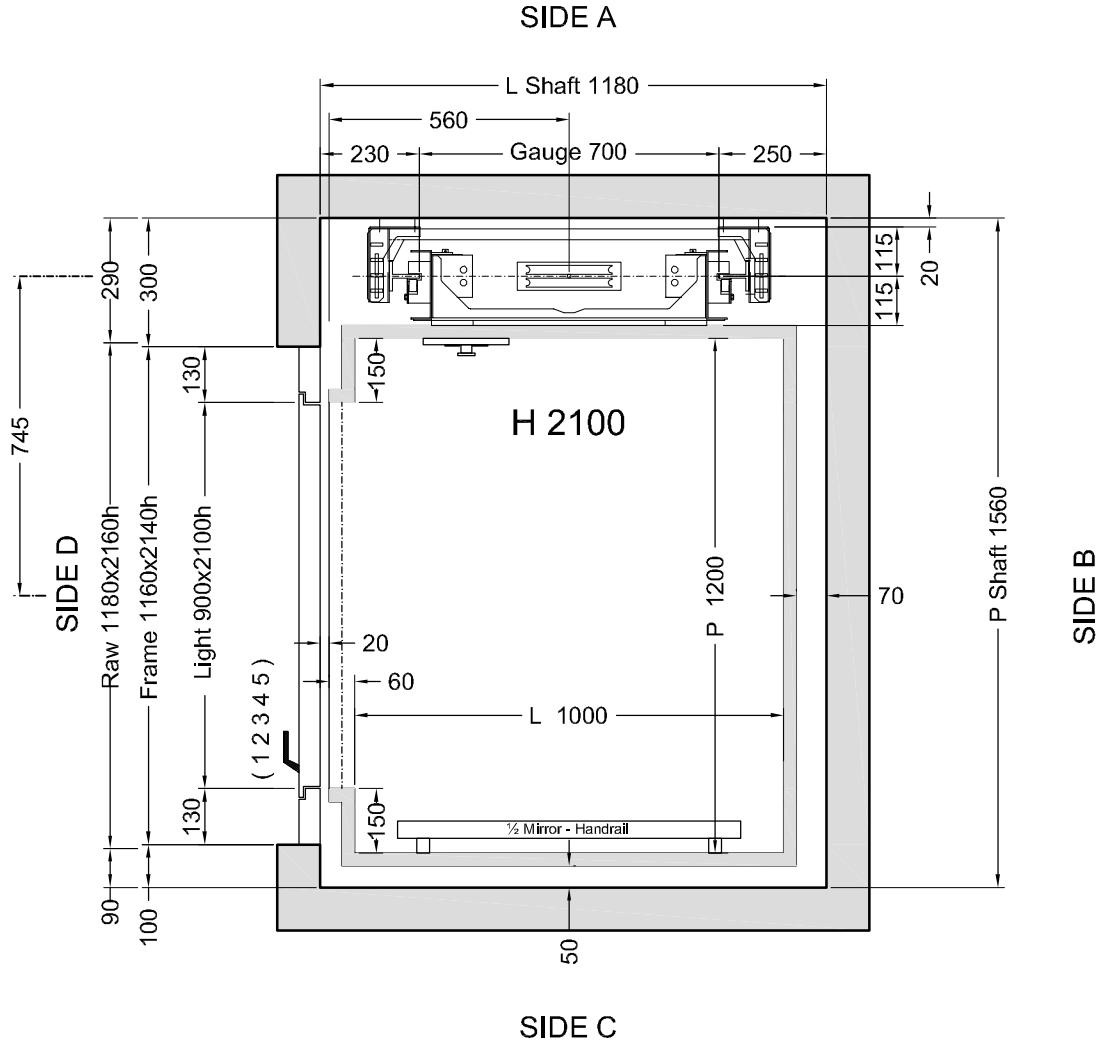

Fermate: 5 - Servizi: 5


Shaft on **Masonry (muratura)**

	VERSIONS	Description	Designer	Date	Disegno Definitivo
					SHEET 1/2
					SHEET DIMENS. A3
		Corsa; Fossa; P.Vano; Lato P.M.; Cernieratura; Dist. L.C..	L. Del Bianco	17/11/2008	SCALE 1:12.5
			Disegno Definitivo L. Del Bianco	1° STESURA 17/11/08	
			CAPACITY 350 Kg	AREA MF 1,2	CAPACITY



**ACCESSORI:**

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide In barre da 2,5 m
- Pistone In due pezzi
- Pompa a mano
- Pressostato
- Doppia velocità
- Manovra con autotenuta
- Arcata rinforzata
- Fotocellula tutta parete

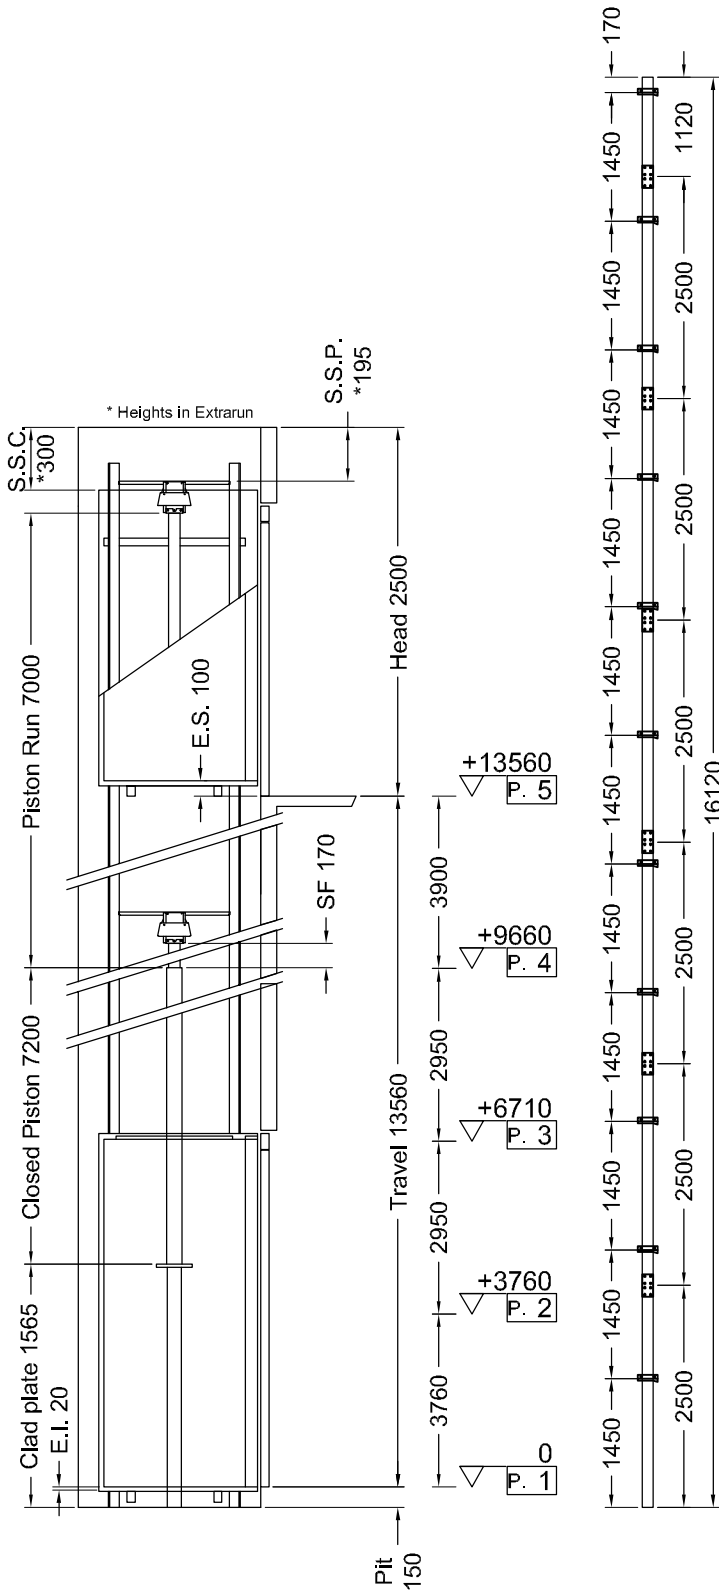

<b>Indirect Installation</b>	Speed <b>0,22 m/s</b>	17/11/08 15.49	(V.019)
------------------------------	-----------------------	----------------	---------

THRUST DURING NORMAL OPERATION				THRUST OF SAFETY DEVICE INTERVENT.			
P	(N)	<b>11222</b>		P	(N)	1264	
N	(N)	<b>1442</b>		N	(N)	7659	
F1	(N)	<b>1615</b>		F1	(N)	2691	
F2	(N)	<b>289</b>		F2	(N)	481	

SPACES		PRESSURES		
E.I.	Extrusion below cabin (mm)	<b>20</b>	Max static pressure (bar)	<b>27,86</b>
E.S.	Extrusion above cabin (mm)	<b>100</b>	Min static pressure (bar)	<b>14,2</b>
SF.	Piston extraction (mm)	<b>170</b>	Overpressure limit (bar)	<b>39</b>
S.S.P.	Piston/head (mm)	<b>195</b>	Residual pressure (bar)	<b>2,52</b>
S.S.C.	Cabin/head (mm)	<b>300</b>		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	<b>MORIS CM3A</b>	Runners	<b>T70-2A</b>
Capacity (l/min)	<b>35</b>	Brackets	(Nr) <b>11</b>
Motor (V)	<b>MF220V</b>	Cables	<b>9 mm 6-(1+9+9)</b>
Power (Kw)	<b>3,3</b>	Cables lenght (mm) 2 x	<b>18600</b>
Piston	<b>MORIS 9130 (ø) 80x7,5x7000</b>	Min actual breaking load (N)	<b>42100</b>
Attacco Olio	<b>basso</b>		
Tubing	<b>MORIS</b>		
Tubing lenght (mm)	<b>5000</b>		
Min hydraulic oil (L)	<b>107,3</b>		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	<b>PFB</b>	<b>BP1</b>	<b>TÜV AFV515</b>
Block Valve	<b>MORIS</b>	<b>0825/P</b>	<b>IMQ 10222</b>
Key Locks	<b>TIEFFE</b>	<b>TIEFFE2000</b>	<b>IMQ 10110</b>

MACHINERY LOCATION			
At floor	<b>1</b>	Away from shaft (mm)	<b>1000</b>
Cables enter in shaft : side	<b>A</b>		

CABIN		CABIN ACCESSORIES	
Panels	<b>Inox Scotch Brife</b>	Handrail	<b>ALLUMINIO,LatI C</b>
Finishes	<b>Inox Scotch Brife</b>	½ Mirror	<b>LatI C</b>
Oper. panel	<b>A COLONNA</b>		
Floor	<b>Gomma a Bolle - Nera</b>		
Roof	<b>FARETTI-Blanco A1</b>		

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double Insertion
  - Guides dimension 2.5 m
  - Piston In 2 pcs
  - Manual pump
  - Manostat
  - Double speed
  - Automatic control
  - Reinforced arcade
  - Full height Infra-red curtain

LE INFORMAZIONI CONTENUTE NEL PRESENTE DISEGNO SONO INTEGRATE DAL MANUALE OPERE MURARIE.

	Disegno Definitivo	1° STESURA
	L. Del Bianco	17/11/08
	<b>Disegno Definitivo</b>	
SCALE	SHEET	
OUT OF SCALE	2/2	