


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
G 1			Alluminium	2000	2100	Aluminium covering	Panoramic	Transparent	

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

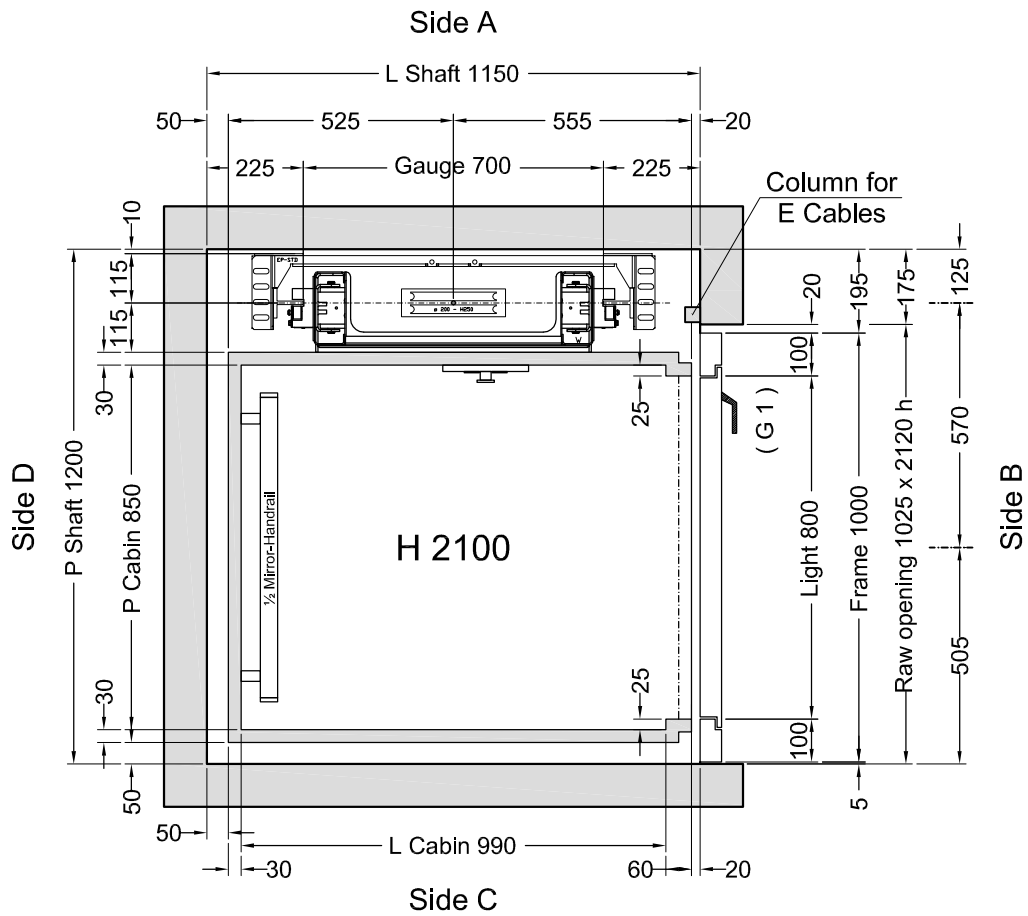

Stops: 2 - Doors: 2


Shaft in **Reinforced concrete (C.A.)**

Customer own flooring: Dimensions **1020 (L) x 850 (P)** thks **20 mm** Weight: **50 kg**

			Designer	Date	Final Drawings	
					Model	SHEET
					ELFO	1/2
			L. Del Bianco	13/10/2014		SHEET DIMENS.
			Final Drawings L. Del Bianco	1° STESURA 20/10/14		A3
			CAPACITY	AREA m ²	CAPACITY	
			300 kg	0,85		

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Maniglie CASPIM
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011
- Pulsanti Cabina: **G 1**

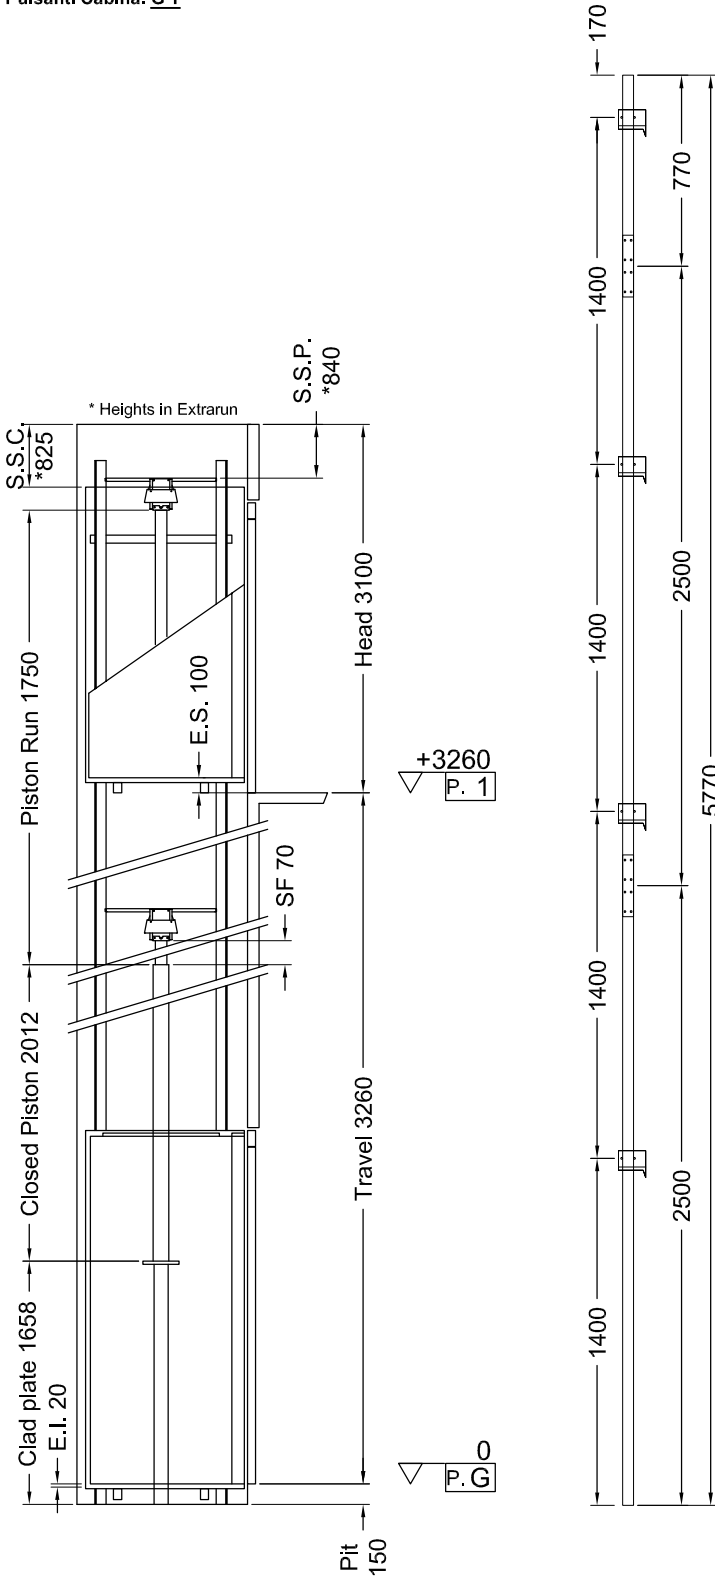

Indirect Installation	Speed 0,3 m/s	20/10/14 17.08 (V.2846)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	9891	P	(N)	481
N	(N)	514	N	(N)	6628
F1	(N)	1098	F1	(N)	1830
F2	(N)	225	F2	(N)	375

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	33,17
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	17,88
SF.	Piston extraction (mm)	70	Overpressure limit (bar)	46,44
S.S.P.	Piston/head (mm)	840	Residual pressure (bar)	1,25
S.S.C.	Cabin/head (mm)	825		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	35	Runners	T70-2A
Motor (V)	MF230V	Brackets	(Nr) 4
Power (Kw)	2,9	Cables	Ø 9 mm 6-(1+9+9)
Nominal current (A)	19	Cables length (mm) 2 x	9000
Piston	Start Home (Ø) 70x5x1750	Min actual breaking load (N)	47300
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	8000		
Min hydraulic oil (L)	40		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	1	Length of the hose travel	4000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Bianco A32PP	½ Mirror	Side D
Finishes	F41PPS	Handrail	Inox S.B., Side D
Oper. panel	VERTICAL (Like finishes)		
Floor	By Customer		
Ceiling	SPOTS LED - Bianco A32PP		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Handles CASPIM
Telephone by Lift Shop
Full height Infra-red curtain V2
Automatic Control 2011
Cabin Buttons: G 1



Final Drawings	1° STESURA
L. Del Bianco	20/10/14
Final Drawings	
SCALE	SHEET
OUT OF SCALE	2/2