


## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
24	1 3 5 6		Standard RAL 9016 *	2000	2100	RAL 9016 *	Panoramic	Transparent	C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(\*) Smooth finish - No raised edges

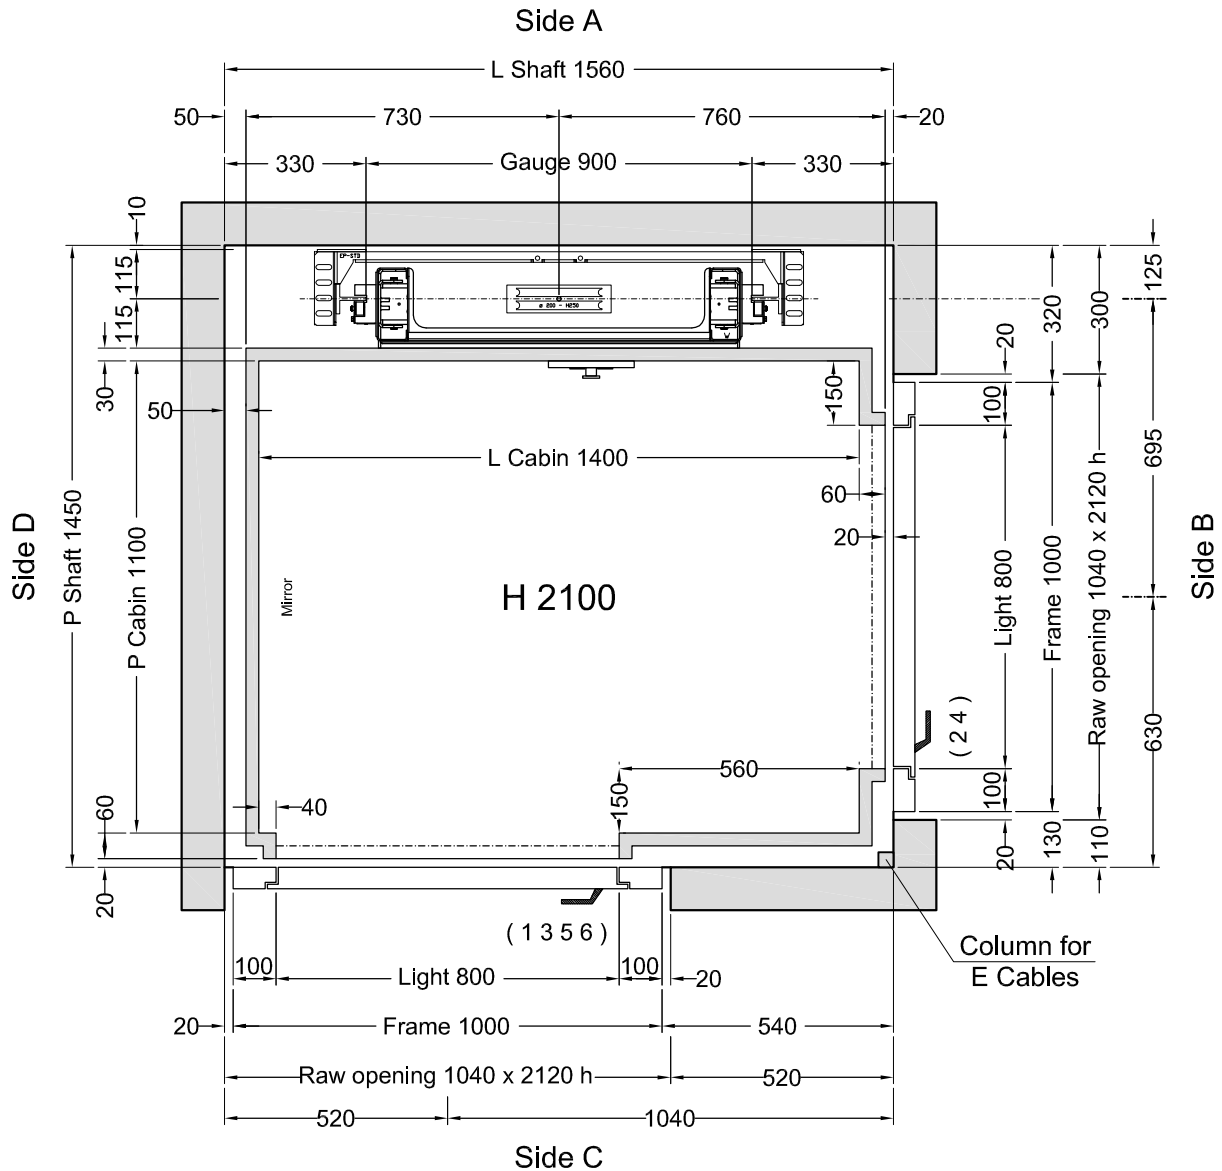


**Stops: 6 - Doors: 6**

Shaft in **Masonry (Muratura)**

			Designer	Date	<b>Final Drawings</b>	
					Model <b>ELFO</b>	SHEET 1/2
			D.Ogliastro	16/01/2015	 <b>Elfo</b>	SHEET DIMENS. <b>A3</b>
			Final Drawings L. Del Bianco	1° STESURA 03/02/15		SCALE 1:12.5
			CAPACITY <b>300 kg</b>	AREA m <sup>2</sup> <b>1,54</b>	CAPACITY	

**ACCESSORI:**

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Maniglie CASPIM
- Telefono a cura Lift Shop
- Armadio (per centralina e quadro): A32PP
- Fotocellula tutta parete V2
- Carter Tetto cabina
- Manovra Automatica 2011

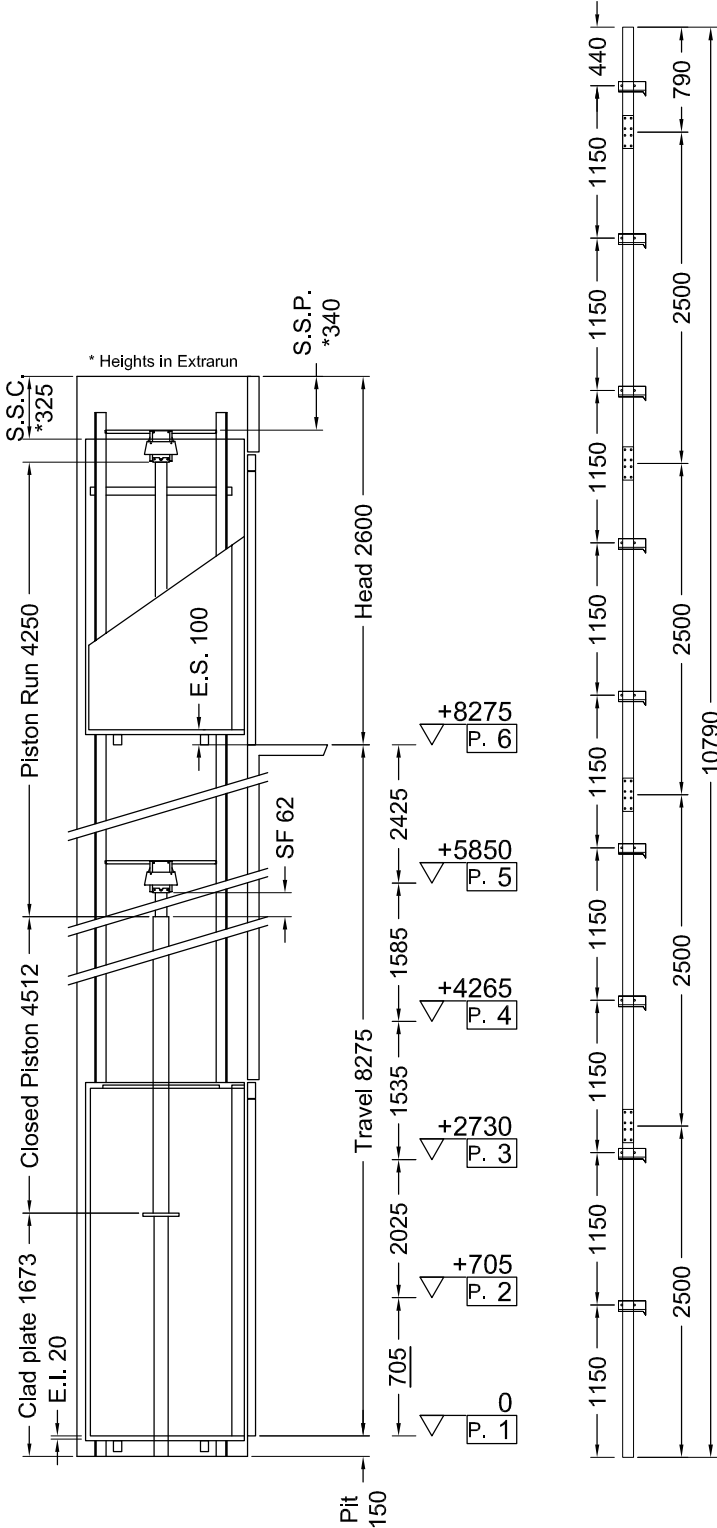

Indirect Installation	Speed 0,3 m/s	03/02/15 14.33 (V.2851)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	11909	P	(N)	678
N	(N)	980	N	(N)	8242
F1	(N)	1639	F1	(N)	2731
F2	(N)	398	F2	(N)	664

SPACES		PRESSURES		
E.I.	Extrairun below cabin (mm)	20	Max static pressure (bar)	35,54
E.S.	Extrairun above cabin (mm)	100	Min static pressure (bar)	20,24
SF.	Piston extraction (mm)	62	Overpressure limit (bar)	49,75
S.S.P.	Piston/head (mm)	340	Residual pressure (bar)	1,76
S.S.C.	Cabin/head (mm)	325		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	<b>GMV HL 3010 (-*)</b>		
Capacity (l/min)	35	Guide rails	<b>T70-2A</b>
Motor (V)	<b>MF230V</b>	Brackets	(Nr) <b>9</b>
Power (Kw)	<b>2,9</b>	Ropes	<b>Ø 9 mm 6-(1+9+9)</b>
Nominal current (A)	<b>27</b>	Cables length (mm) 2 x	<b>14000</b>
Piston	<b>Start Home (Ø)70x5x4250</b>	Min actual breaking load (N)	<b>47300</b>
Opt. oil position	<b>BASSO</b>		
Tubing	<b>3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"</b>		
Tubing length (mm)	<b>8000</b>		
Min hydraulic oil (L)	<b>52</b>		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	<b>PFB</b>	<b>BP1</b>	<b>TÜV AFV515</b>
Block Valve	<b>START ELEVATOR</b>	<b>1/2" 0327</b>	<b>CA50.00525</b>
Key Locks	<b>Prudhomme</b>	<b>PLT/L/CPX NL 11-400-1002-125-02</b>	

MACHINERY LOCATION			
At floor	<b>1</b>	Length of the hose travel	<b>3000 (mm)</b>
Cables enter in shaft: Side	<b>B</b>		

CABIN		CABIN ACCESSORIES	
Panels	<b>Black 0509 vg LUC</b>	Mirror	<b>Side D</b>
Finishes	<b>Inox BA mecc.</b>	Outside covering	<b>Roof</b>
Oper. panel	<b>VERTICAL (Like finishes)</b>	Outside finishing	<b>Antracite N4</b>
Floor	<b>TOUCH 2404</b>		
Ceiling	<b>SPOTS LED - Inox BA mecc.</b>		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Handles CASPIM
<u>Telephone by Lift Shop</u>
Cabinet: A32PP
Full height infra-red curtain V2
<u>Roof covering</u>
Automatic Control 2011