


## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	WINDOW	GLASS	ACCESSORIES	C1	C2	PM	PE
	2	1	Standard Rust-proof	2000	2100	Absent				X		

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

Automatic Control  
2008

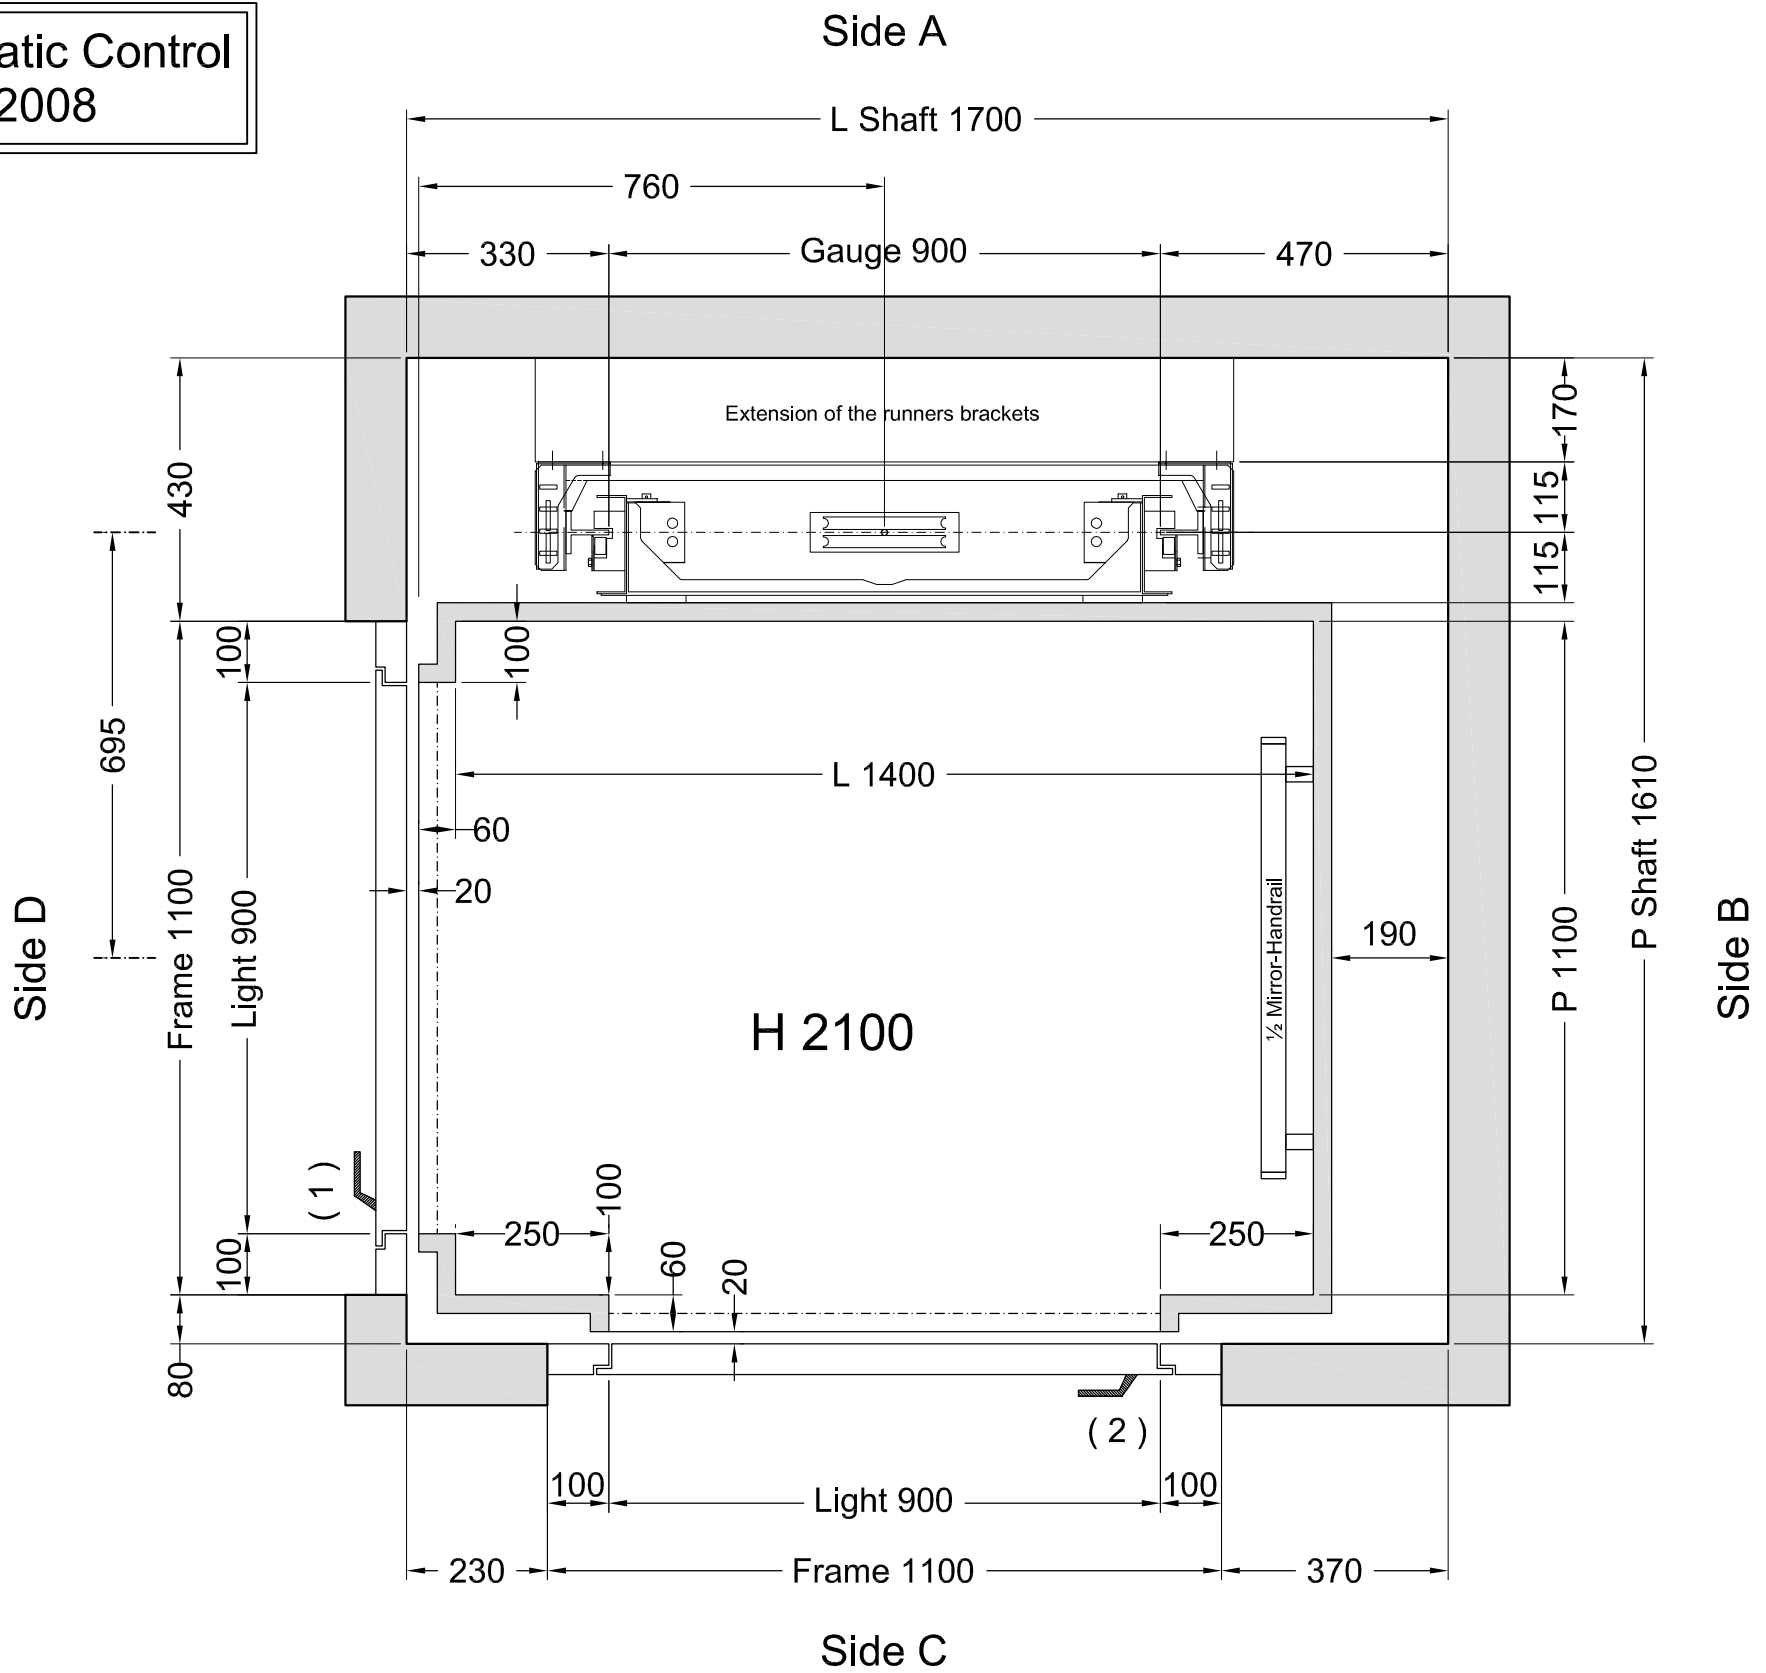

Customer own flooring: Dimensions **1430 (L) x 1130 (P)** thks **15 mm** Weight: **50 kg**

Feasibility n° **1450 - Arpa 4070**

**Stops: 2 - Doors: 2**

Shaft on **Masonry (Muratura)**

	VERSIONS	Description	Designer	Date	
					<b>Final Design Drawings</b>  SHEET 1/2 SHEET DIMENS. A3 SCALE 1:12.5
		Da arpa 4010 a ARPA 4070.	L.Del Bianco	13/01/2011	
		Varie Modifiche.	L.Del Bianco	10/12/2010	
			Final Design Drawings L.Del Bianco	1° STESURA 15/02/10	
			CAPACITY 350 Kg	AREA m² 1,54	CAPACITY 

**ACCESSORI:**

- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Doppia velocità
- Manovra Automatica 2008
- Arcata rinforzata
- Maniglie CASPIM
- Fotocellula tutta parete

Indirect Installation Speed 0,3 m/s 13/01/11 11.54 (V.2303)

**THRUST DURING NORMAL OPERATION      THRUST OF SAFETY DEVICE INTERVENT.**

P	(N)	11260	P	(N)	520
N	(N)	578	N	(N)	7564
F1	(N)	1725	F1	(N)	2875
F2	(N)	434	F2	(N)	723

**SPACES      PRESSURES**

E.I.	Extrarun below cabin	(mm)	20	Max static pressure	(bar)	36,07
E.S.	Extrarun above cabin	(mm)	100	Min static pressure	(bar)	18,23
SF.	Piston extraction	(mm)	270	Overpressure limit	(bar)	50,5
S.S.P.	Piston/head	(mm)	195	Residual pressure	(bar)	1,35
S.S.C.	Cabin/head	(mm)	300			

**HYDRAULIC UNIT      MECHANICAL PARTS**

Central unit	<b>START 96SLE</b>	Runners	<b>T70-2A</b>
Capacity (l/min)	<b>35</b>	Brackets	(Nr) <b>6</b>
Motor (V)	<b>MF230V</b>	Cables	<b>9 mm 6-(1+9+9)</b>
Power (Kw)	<b>3</b>	Cables lenght (mm) 2 x	<b>8900</b>
Piston	<b>START Home (ø) 70x5x2250</b>	Min actual breaking load (N)	<b>42100</b>
Opt. oil position	<b>basso</b>		
Tubing	<b>3/4" R1 FD+FD GAS</b>		
Tubing lenght (mm)	<b>7000</b>		
Min hydraulic oil (L)	<b>29,3</b>		

**SECURITY DEVICES      Manufacturer      Model      Certificate**

Safety Gear	<b>PFB</b>	<b>BP1</b>	<b>TÜV AFV515</b>
Block Valve	<b>START</b>	<b>1/2"03026/01;03026/02</b>	<b>IMQ CA50.00526</b>
Key Locks	<b>TIEFFE</b>	<b>TIEFFE2000</b>	<b>IMQ I0110</b>

**MACHINERY LOCATION**


At floor	<b>1</b>	Length of the hose travel	<b>3000 (mm)</b>
Cables enter in shaft: Side	<b>A</b>		

**CABIN      CABIN ACCESSORIES**

Panels	<b>ARPA 4070</b>	½ Mirror	<b>Lati B</b>
Finishes	<b>Similinox F12PPS</b>	Handrail	<b>ALLUMINIO, Lati B</b>
Oper. panel	<b>HORIZONTAL</b>		
Floor	<b>By Customer</b>		
Roof	<b>SPOTS - Bianco A1</b>		

**OTHER ACCESSORIES**

- Guides dimension 2.5 m
- Manual pump
- Manostat with overweight signal
- Double speed
- Automatic control 2008
- Reinforced arcade
- Handles CASPIM
- Full height infra-red curtain

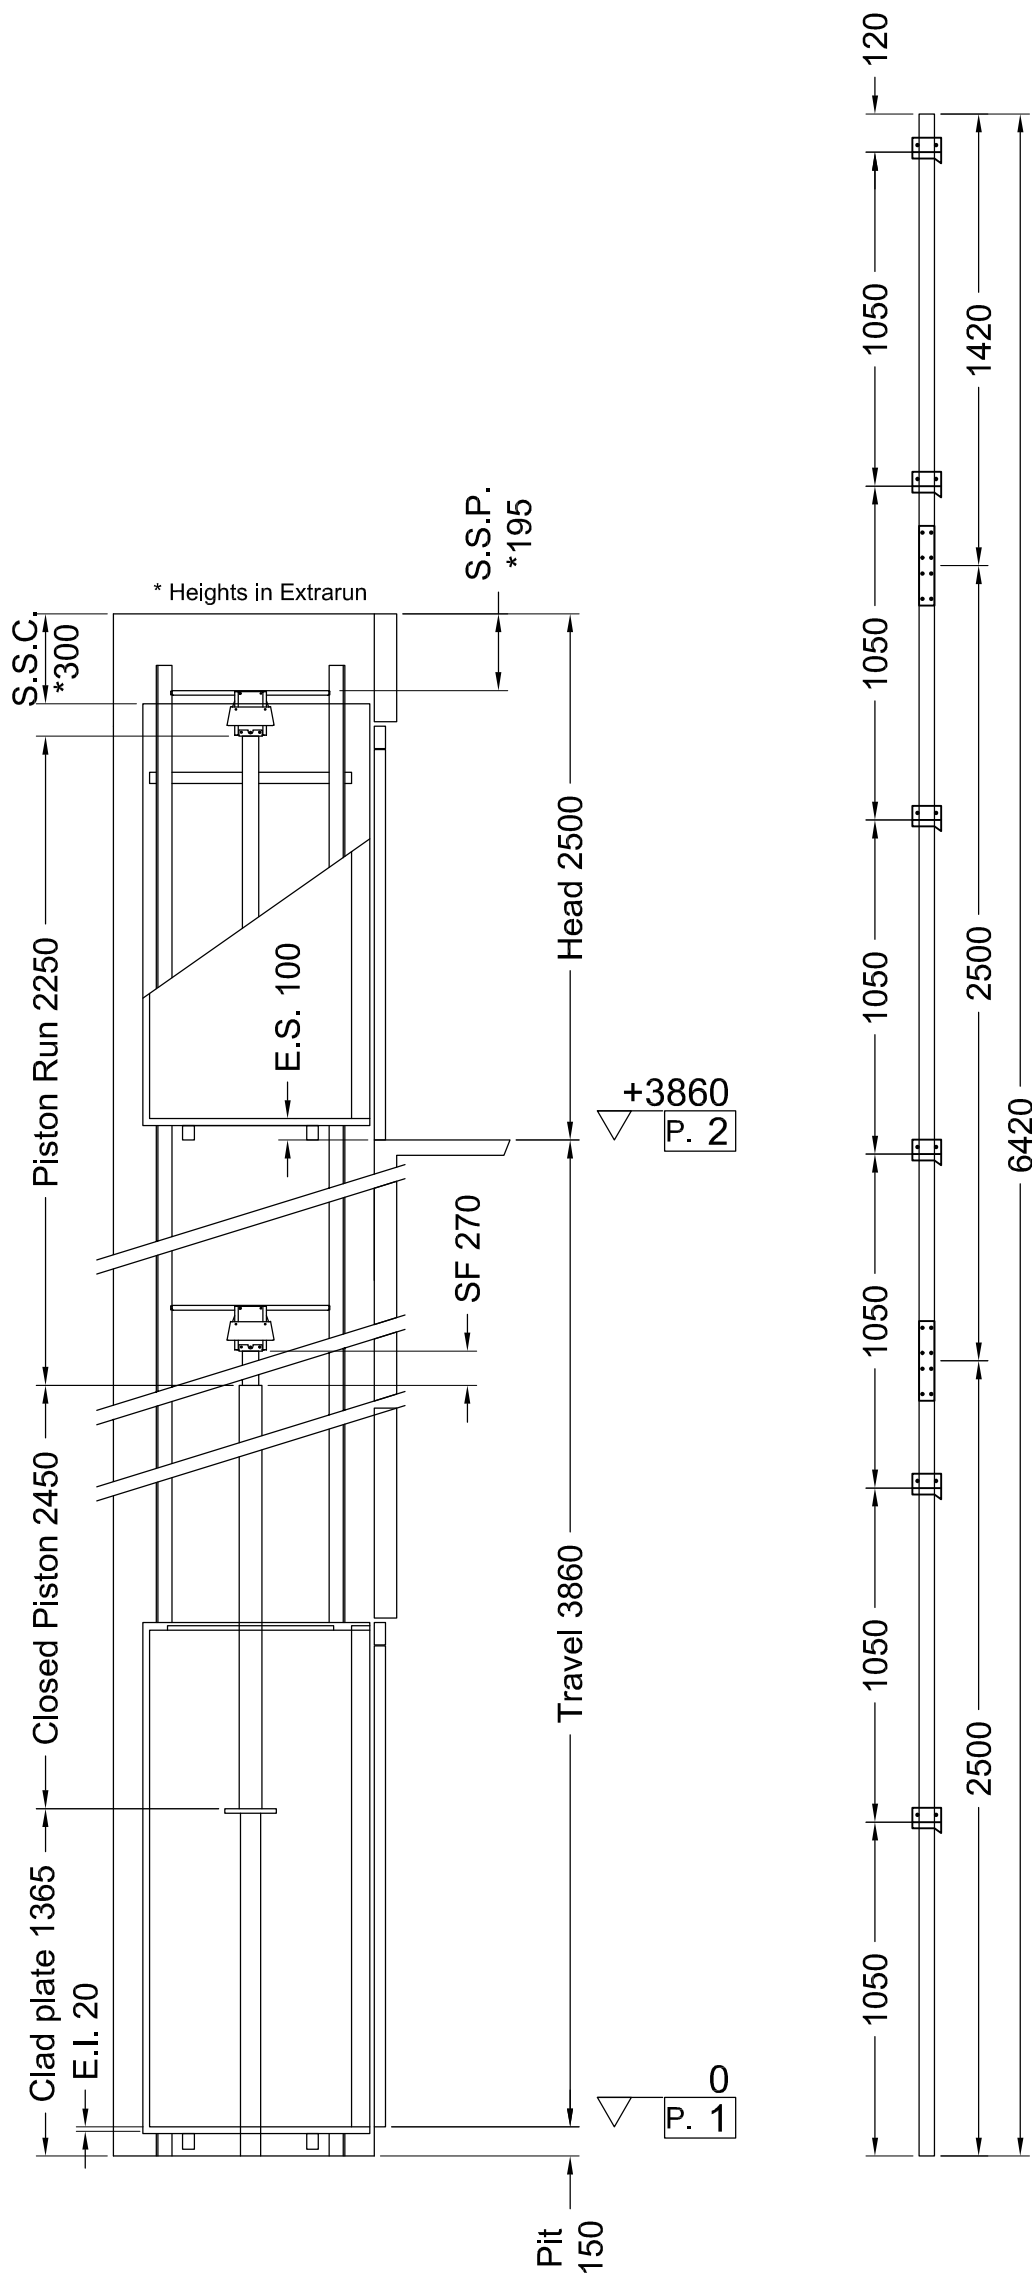

L'approssimazione delle misure è solo a titolo informativo e non costituisce garanzia di precisione. Le misure definitive sono quelle riportate nei disegni. EP Murarie rev.3.



Final Design Drawings	1° STESURA
L. Del Bianco	15/02/10
<b>Final Design Drawings</b>	
SCALE	SHEET
OUT OF SCALE	2/2