

## FLOOR DOOR


Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		1 2 3	Standard Rust-proof *	2000	2100	Rust-proof *	Absent		

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

### Shaft V66 ()

ENVIRONMENT	VERSION	Cladding	START	ROOF	ANCHORAGE
Inside	Galvanized	See pages 3 and 4	Pit bottom	Excluded	Anchorage to care of the Customer (Side A dist. 0 mm; Sides C and D dist. 10 mm). Ancoraggio a cura del Committente.
Interno	Zincata	Vedi Pag. 3 e 4	Fondo Fossa	Assente	

(\* ) Smooth finish - No raised edges

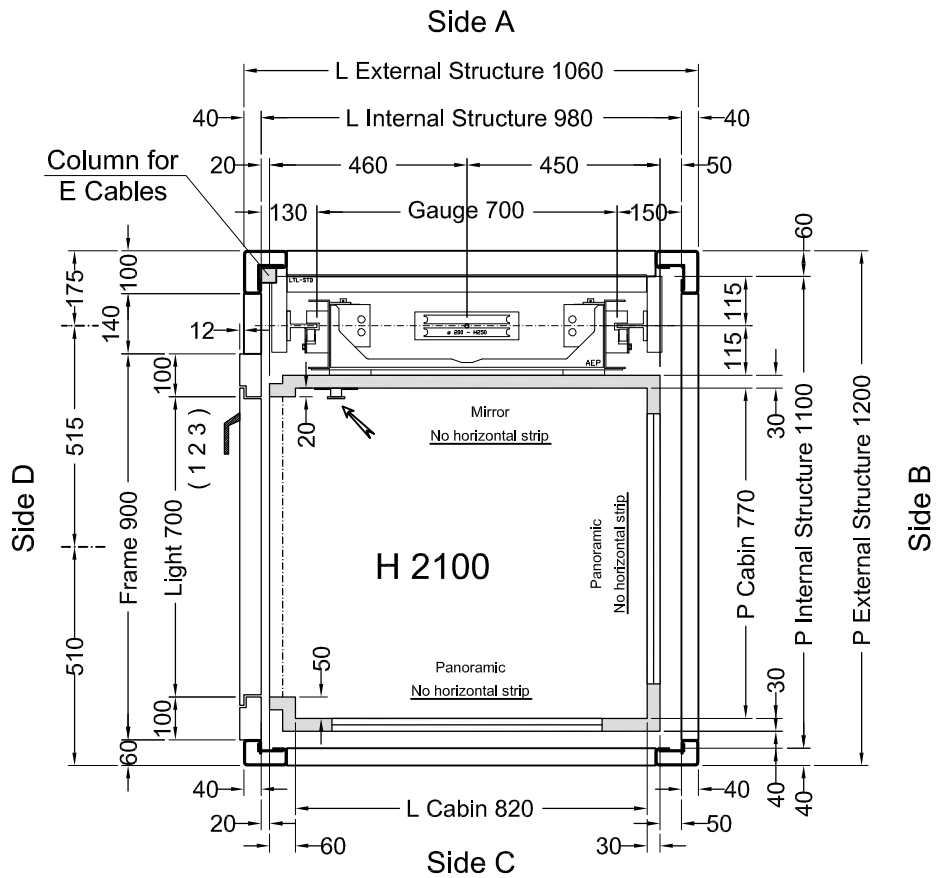


Feasibility n° 2056 - COP with buttons directly in the corner - No Strip Walls

**Stops: 3 - Doors: 3**


Shaft in **Shaft V66 ()**

Customer own flooring: Dimensions **850** (L) x **770** (P) thks **20** mm Weight: **15** kg

ORDER	Description	Designer	Date	Final Drawings	
				Model	SHEET
				ELFO	1/4
		D.Tomei	11/09/2014		SHEET DIMENS.
		L. Del Bianco	10/09/2014		A3
		Final Drawings L. Del Bianco	1° STESURA 22/09/14		SCALE 1:12.5
		CAPACITY	AREA m <sup>2</sup>	CAPACITY	
		300 kg	0,64		

**ACCESSORI:**

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pistone verniciato RAL 9005
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Dispositivo falsa testata
- Maniglie CASPIM
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Carter Tetto cabina
- Manovra Automatica 2011

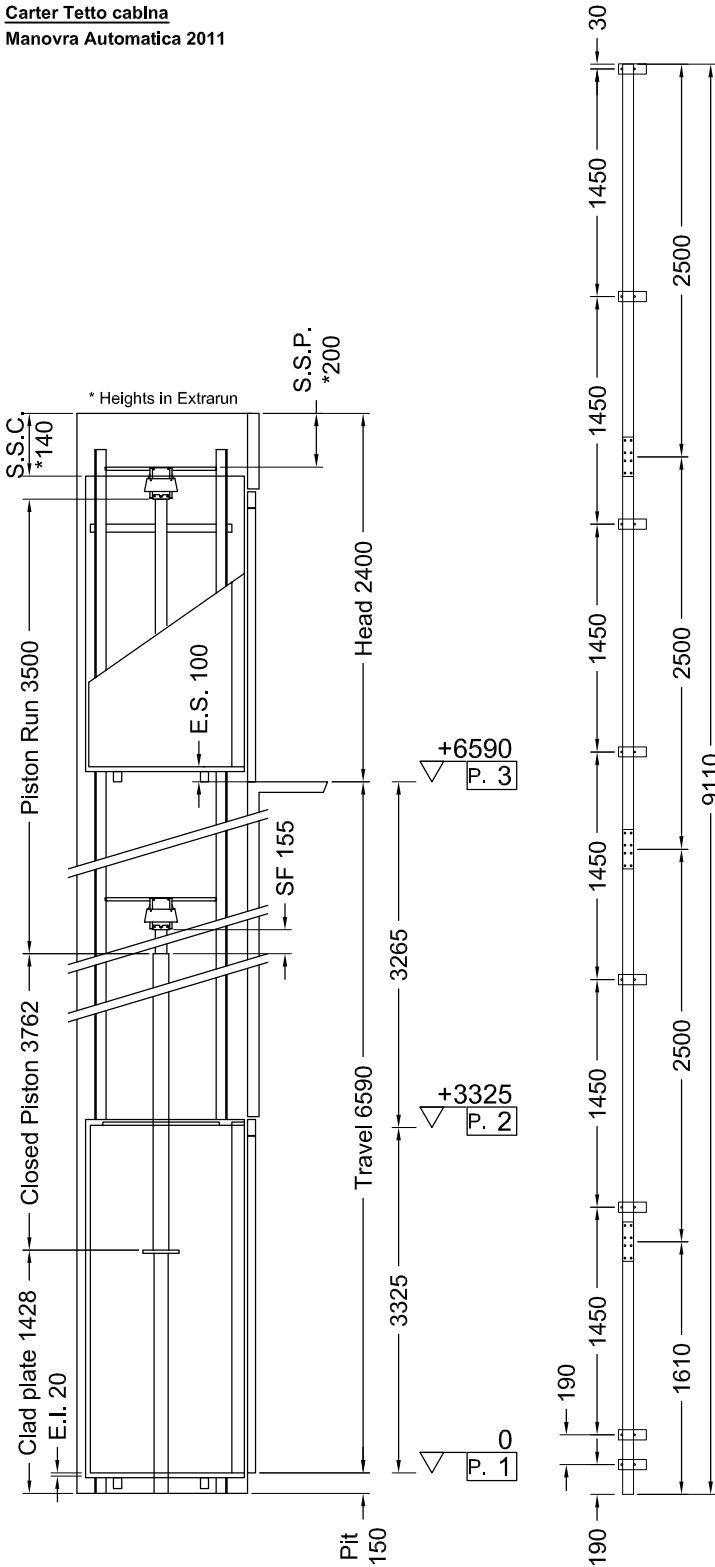

Indirect Installaton	Speed 0,3 m/s	22/09/14 11.44 (V.2846)
----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	9492	P	(N)	619
N	(N)	806	N	(N)	6515
F1	(N)	1037	F1	(N)	1729
F2	(N)	205	F2	(N)	342

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	31,58
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	16,29
SF.	Piston extraction (mm)	155	Overpressure limit (bar)	44,22
S.S.P.	Piston/head (mm)	200	Residual pressure (bar)	1,61
S.S.C.	Cabin/head (mm)	140		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	<b>GMV HL 3010 (-*)</b>		
Capacity (l/min)	35	Runners	<b>T70-2A</b>
Motor (V)	<b>MF230V</b>	Brackets	(Nr) <b>8</b>
Power (Kw)	<b>2,9</b>	Cables	$\varnothing$ <b>9 mm 6-(1+9+9)</b>
Nominal current (A)	<b>19</b>	Cables length (mm) 2 x	<b>12000</b>
Piston	<b>START Hom<math>\varnothing</math> 70x5x3500</b>	Min actual breaking load (N)	<b>47300</b>
Opt. oil position	<b>BASSO</b>		
Tubing	<b>3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"</b>		
Tubing length (mm)	<b>9000</b>		
Min hydraulic oil (L)	<b>49</b>		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	<b>PFB</b>	<b>BP1</b>	<b>TÜV AFV515</b>
Block Valve	<b>START ELEVATOR</b>	<b>1/2" 0327</b>	<b>CA50.00525</b>
Key Locks	<b>Prudhomme</b>	<b>PLT/L/CPX NL 11-400-1002-125-02</b>	

MACHINERY LOCATION			
At floor	<b>1</b>	Length of the hose travel	<b>5000 (mm)</b>
Cables enter in shaft: Side	<b>A</b>		

CABIN		CABIN ACCESSORIES	
Panels	<b>Galvanized sheet</b>	Mirror **	<b>Side A</b>
Finishes	<b>Galvanized sheet</b>	Panoramic **	<b>Side B, C</b>
Oper. panel	<b>VERTICAL ***</b>	Outside covering	<b>Side B, C, Roof</b>
Floor	<b>By Customer</b>	Outside finishing	<b>Galvanized sheet</b>
Ceiling	<b>SPOTS LED - Galvanized sheet</b>		
(**) No horizontal strip			
(***) Recessed mounted in the corner (Buttons directly into profile - no cover plate)			


OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Piston painted RAL 9005
Manual pump
Manostat with overweight signal
Two speed
False head device
Handles CASPIM
Telephone by Lift Shop
Full height Infra-red curtain V2
Roof covering
Automatic Control 2011

Final Drawings	L. Del Bianco	1° STESURA	22/09/14
Final Drawings			
SCALE	OUT OF SCALE	SHEET	2/4

### Shaft V66 ()

ENVIRONMENT	VERSION	Cladding	START	ROOF	ANCHORAGE
Inside	Galvanized	See pages 3 and 4	Pit bottom	Excluded	Anchorage to care of the Customer (Side A dist. 0 mm; Sides C and D dist. 10 mm). Ancoraggio a cura del Committente.
Interno	Zincata	Vedi Pag. 3 e 4	Fondo Fossa	Assente	

*Anchorage in height of 3 frames in head and every 3.5 m max*

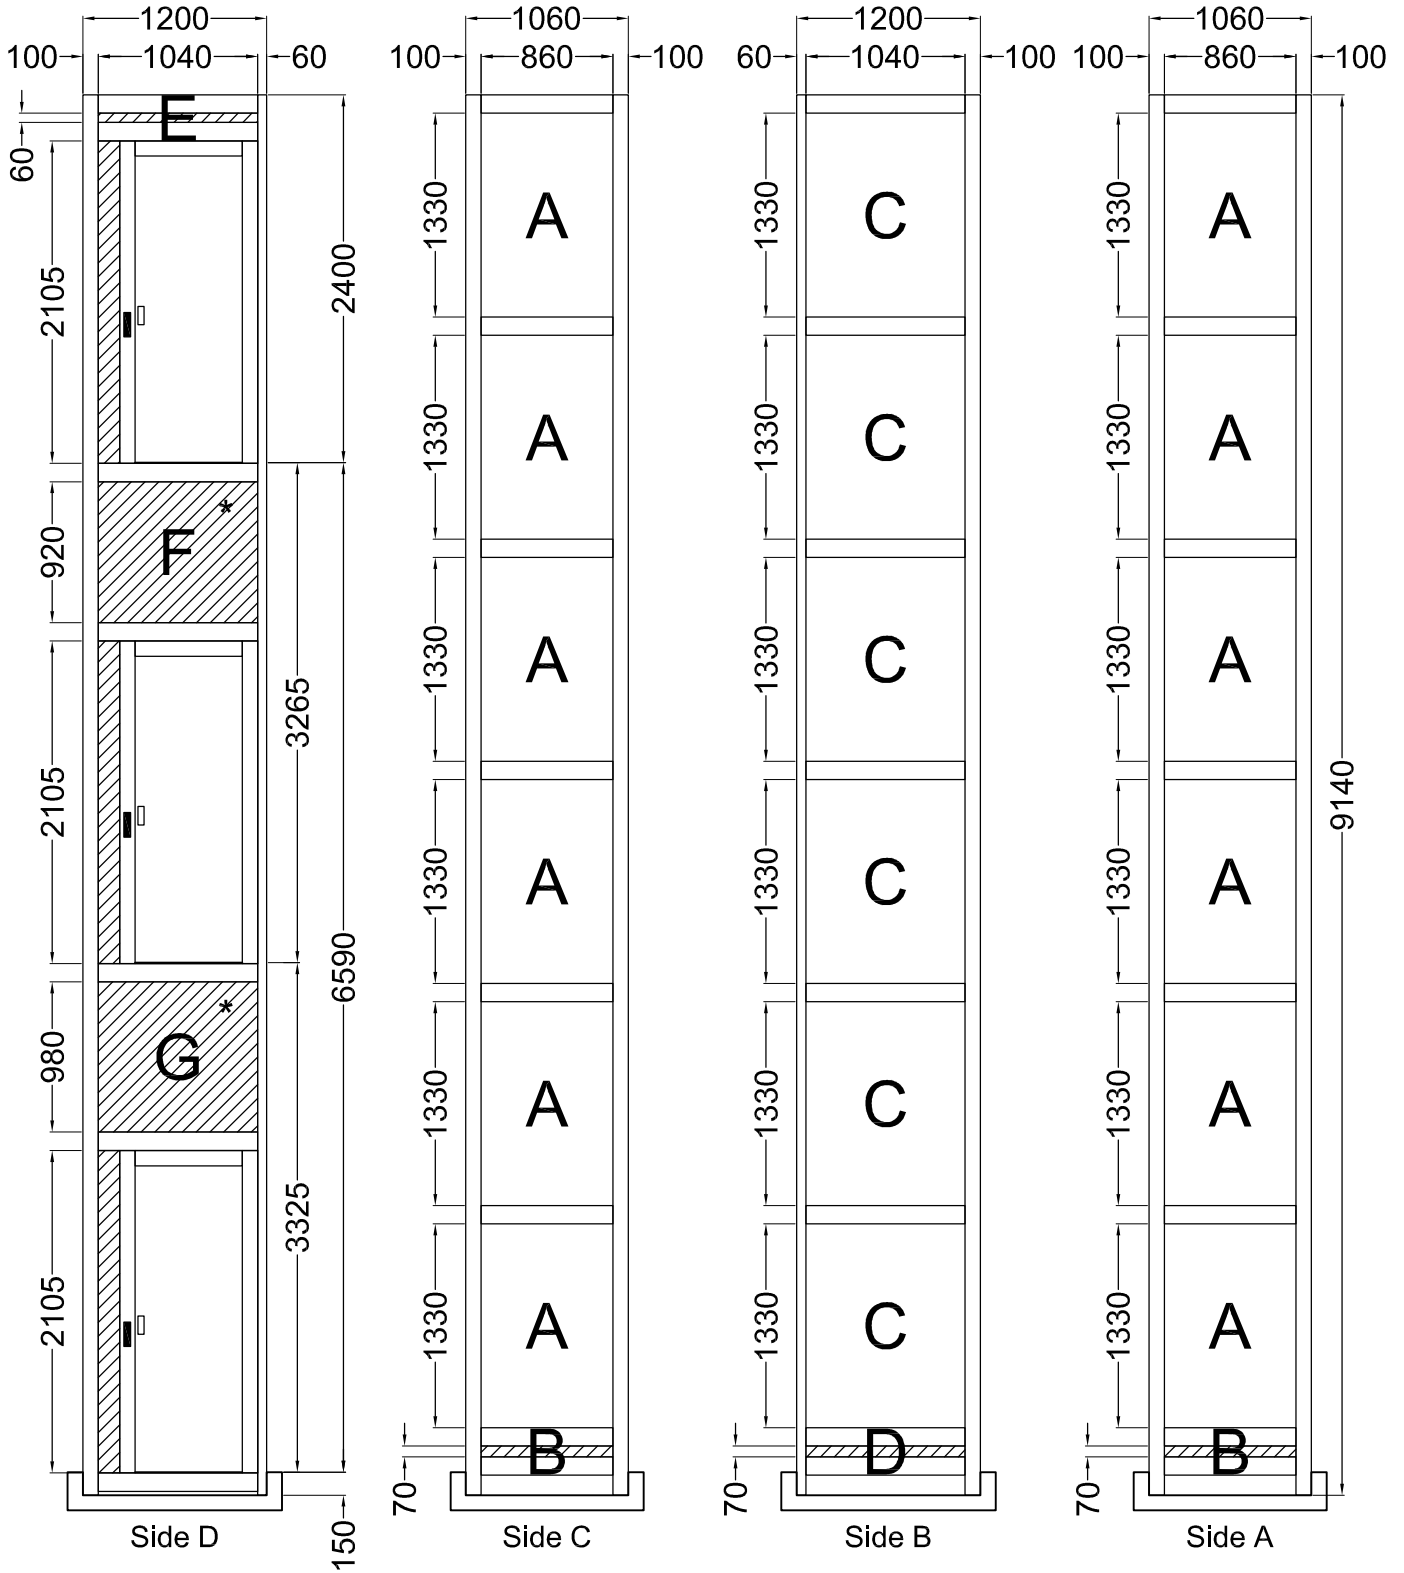

(\*) Internally smooth and continuous wall on access side

(\*) Parete internamente liscia e continua Lato Accesso



Cladding Galvanized  
Tamponamento Zincato