


## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
	4	13	Not Supplied by EP	2000	2110				
	2		Not Supplied by EP	2000	2110				C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

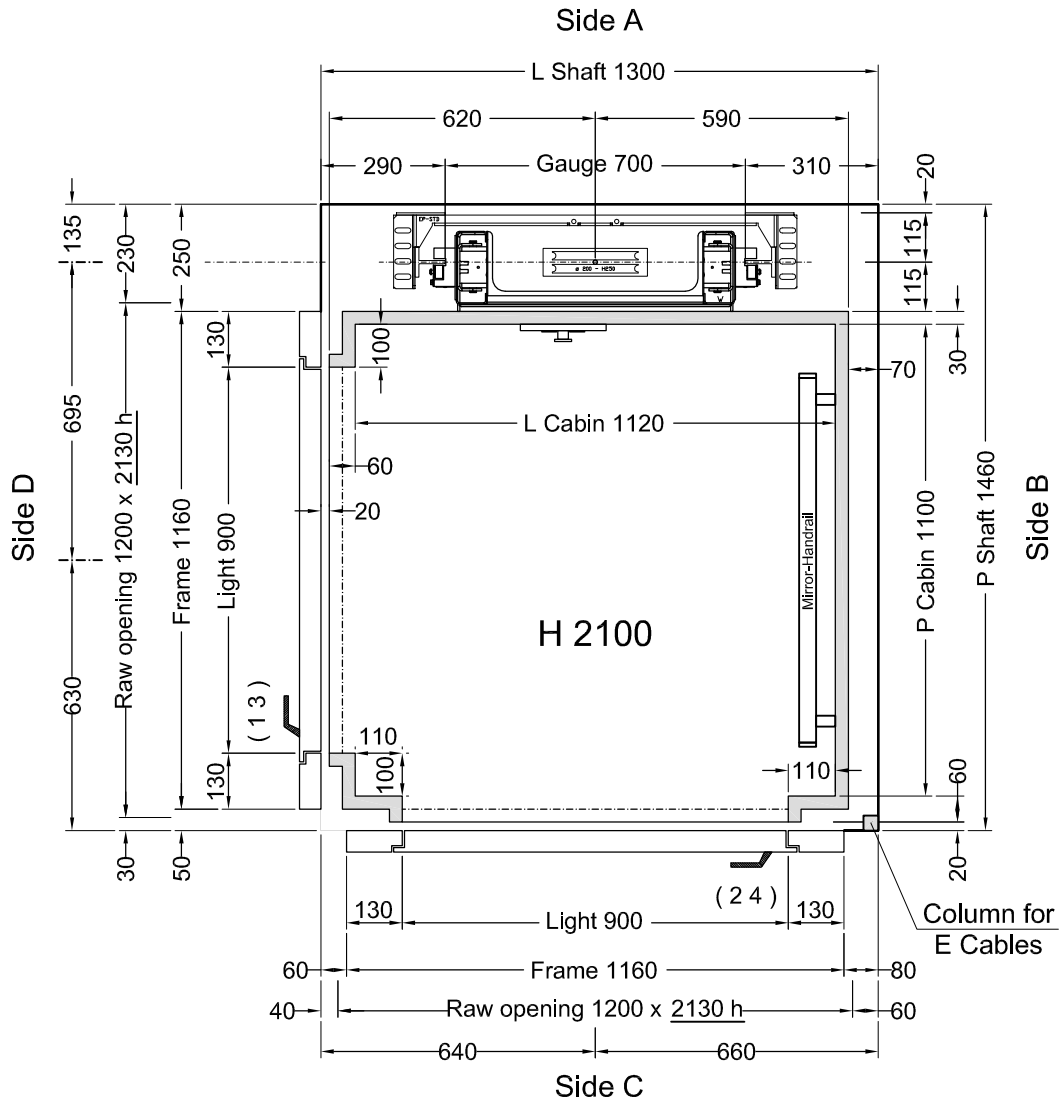

**Feasibility n° 1993 - Panels colour - Led Strips**

**Stops: 4 - Doors: 4**


Customer own flooring: Dimensions **1150 (L) x 1130 (P)** thks **20 mm** Weight: **22 kg**

Shaft in **Shaft at Client expense (Struttura a carico Cliente)**

		Designer	Date	Final Drawings	
		L. Del Bianco	29/05/2014	Model <b>ELFO</b>	SHEET 1/2
		L. Del Bianco	20/05/2014		SHEET DIMENS. <b>A3</b>
		D.Ogliastro	16/05/2014		SCALE 1:12.5
	Final Drawings L. Del Bianco	1° STESURA 04/06/14	CAPACITY		CAPACITY
		300 kg	AREA m <sup>2</sup> 1,24		

**ACCESSORI:**

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011

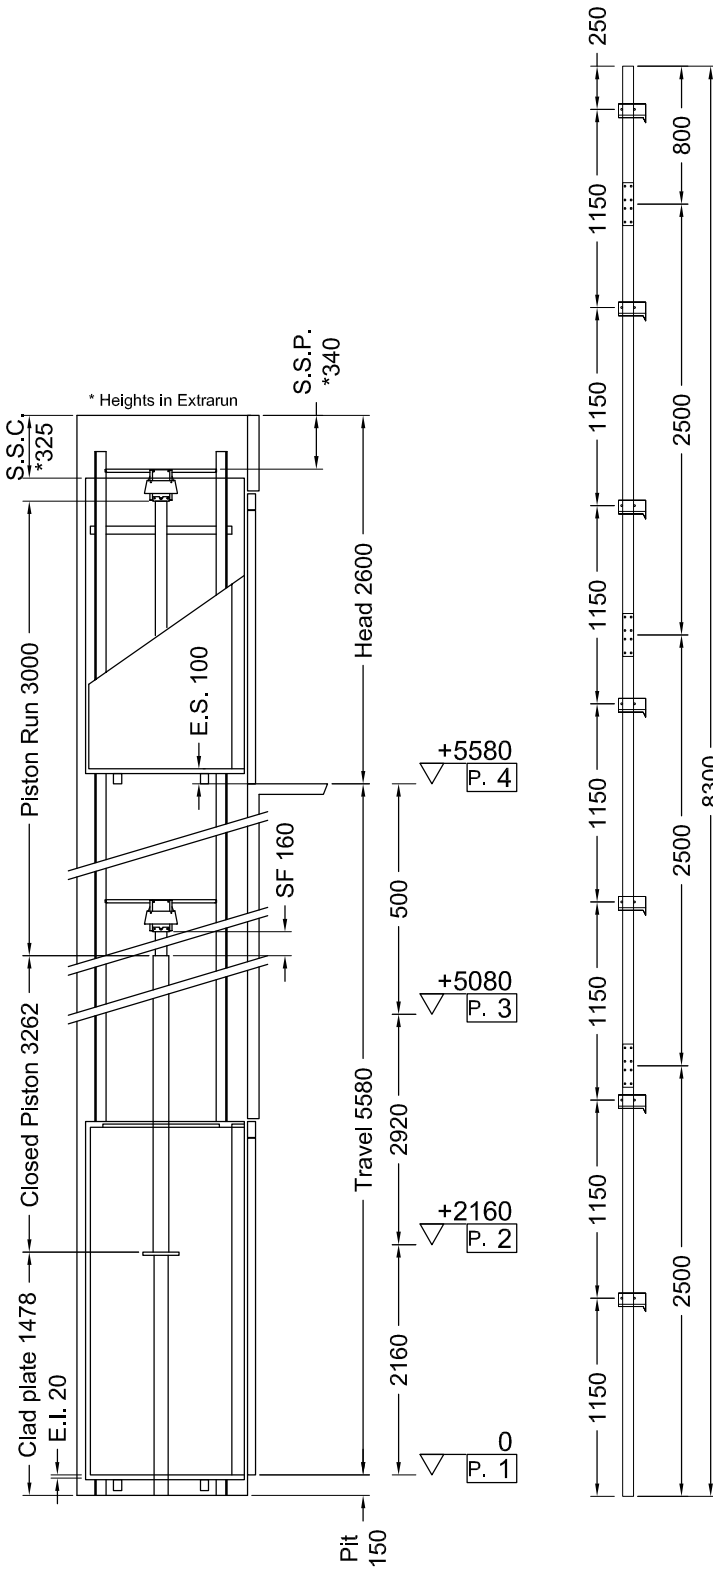

Indirect Installation	Speed 0,3 m/s	04/06/14 14.22 (V.2844)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	10188	P	(N)	579
N	(N)	721	N	(N)	6934
F1	(N)	1394	F1	(N)	2323
F2	(N)	260	F2	(N)	434

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	33,54
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	18,25
SF.	Piston extraction (mm)	160	Overpressure limit (bar)	46,96
S.S.P.	Piston/head (mm)	340	Residual pressure (bar)	1,51
S.S.C.	Cabin/head (mm)	325		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	<b>GMV HL 3010 (-*)</b>		
Capacity (l/min)	35	Runners	<b>T70-2A</b>
Motor (V)	<b>MF230V</b>	Brackets	(Nr) <b>7</b>
Power (Kw)	<b>2,9</b>	Cables	Ø <b>9 mm 6-(1+9+9)</b>
Corrente (A)	<b>19</b>	Cables length (mm) 2 x	<b>11000</b>
Piston	<b>START Homø 70x5x3000</b>	Min actual breaking load (N)	<b>47300</b>
Opt. oil position	<b>BASSO</b>		
Tubing	<b>3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"</b>		
Tubing length (mm)	<b>5000</b>		
Min hydraulic oil (L)	<b>45</b>		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	<b>PFB</b>	<b>BP1</b>	<b>TÜV AFV515</b>
Block Valve	<b>START ELEVATOR</b>	<b>1/2" 0327</b>	<b>CA50.00525</b>
Key Locks	<b>TIEFFE</b>	<b>TIEFFE2000</b>	<b>IMQ I0110</b>

MACHINERY LOCATION			
At floor	<b>1</b>	Length of the hose travel	<b>1000 (mm)</b>
Cables enter in shaft: Side	<b>A</b>		

CABIN		CABIN ACCESSORIES	
Panels	<b>F41PPS</b>	Mirror	<b>Side B</b>
Finishes	<b>Grigio PPS1</b>	Handrail	<b>Alluminium, Side B</b>
Oper. panel	<b>VERTICAL (Like finishes)</b>		
Floor	<b>By Customer</b>		
Ceiling	<b>LABIRINT - Blanco A1 - Led Strips</b>		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Telephone by Lift Shop
Full height Infra-red curtain V2
Automatic Control 2011

Final Drawings L. Del Bianco	1° STESURA 04/06/14
<b>Final Drawings</b>	
SCALE OUT OF SCALE	SHEET 2/2