


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		1 2	Not Supplied by EP	2000	2110		Absent		C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

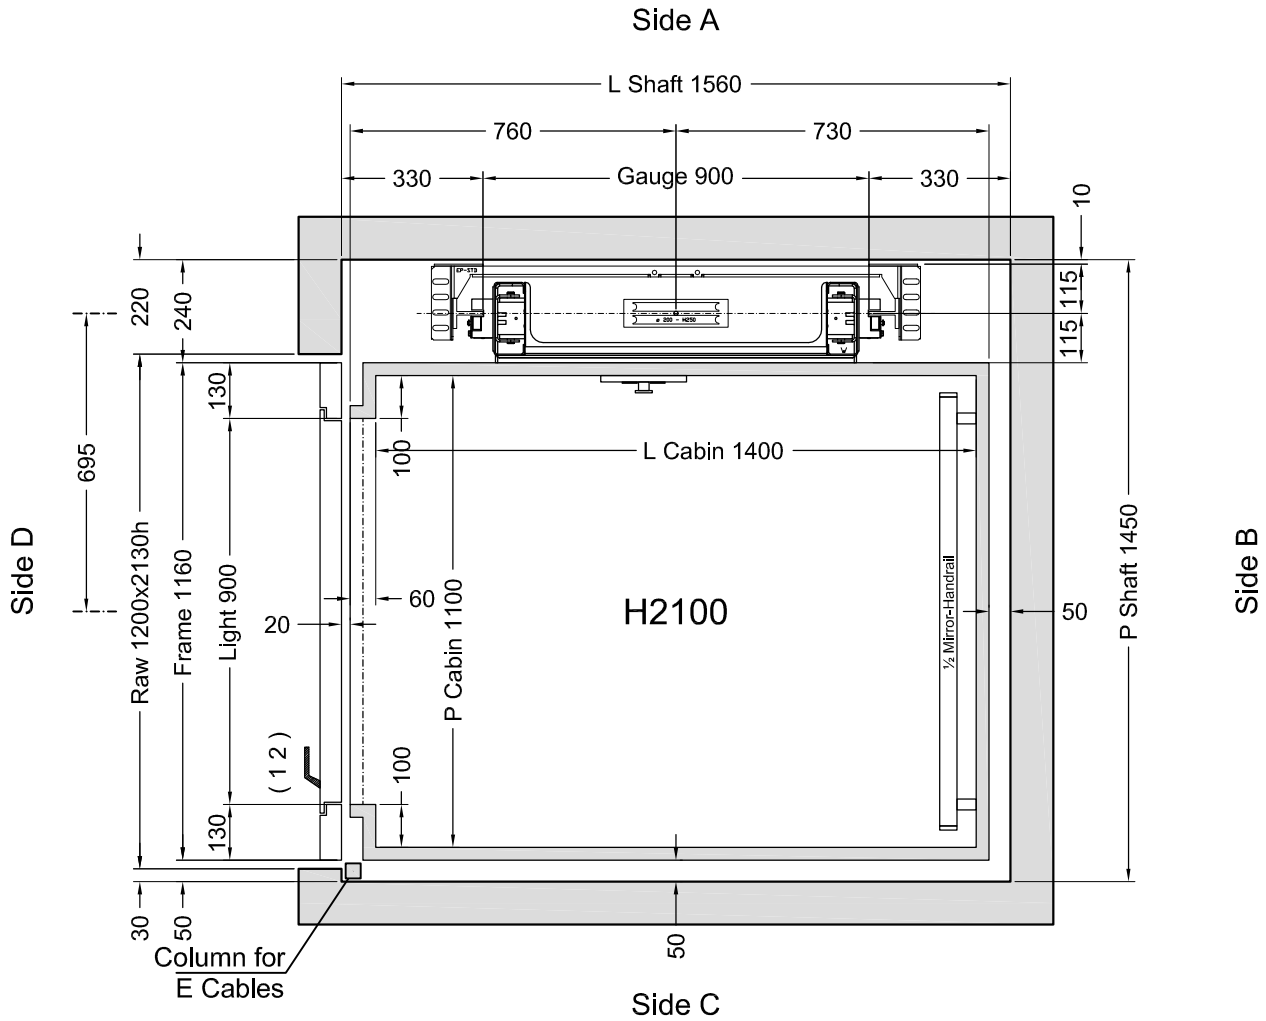

Customer own flooring: Dimensions **1430 (L) x 1100 (P)** thks **15 mm** Weight: **27 kg**


Stops: 2 - Doors: 2

Shaft in **Masonry (Muratura)**

D.F.C.E.F.	C o n t e n t	Designer	Date	Final Drawings	
				Model ELFO	SHEET 1/2
		Colamarino	10/03/2014	 Elfo	SHEET DIMENS. A3
		Final Drawings D.Ogliastro	1° STESURA 18/03/14		SCALE 1:12.5
		CAPACITY 350 Kg	AREA m ² 1,54	CAPACITY	

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Dispositivo falsa testata
- Telefono
- Fotocellula tutta parete V2
- Manovra Automatica 2011

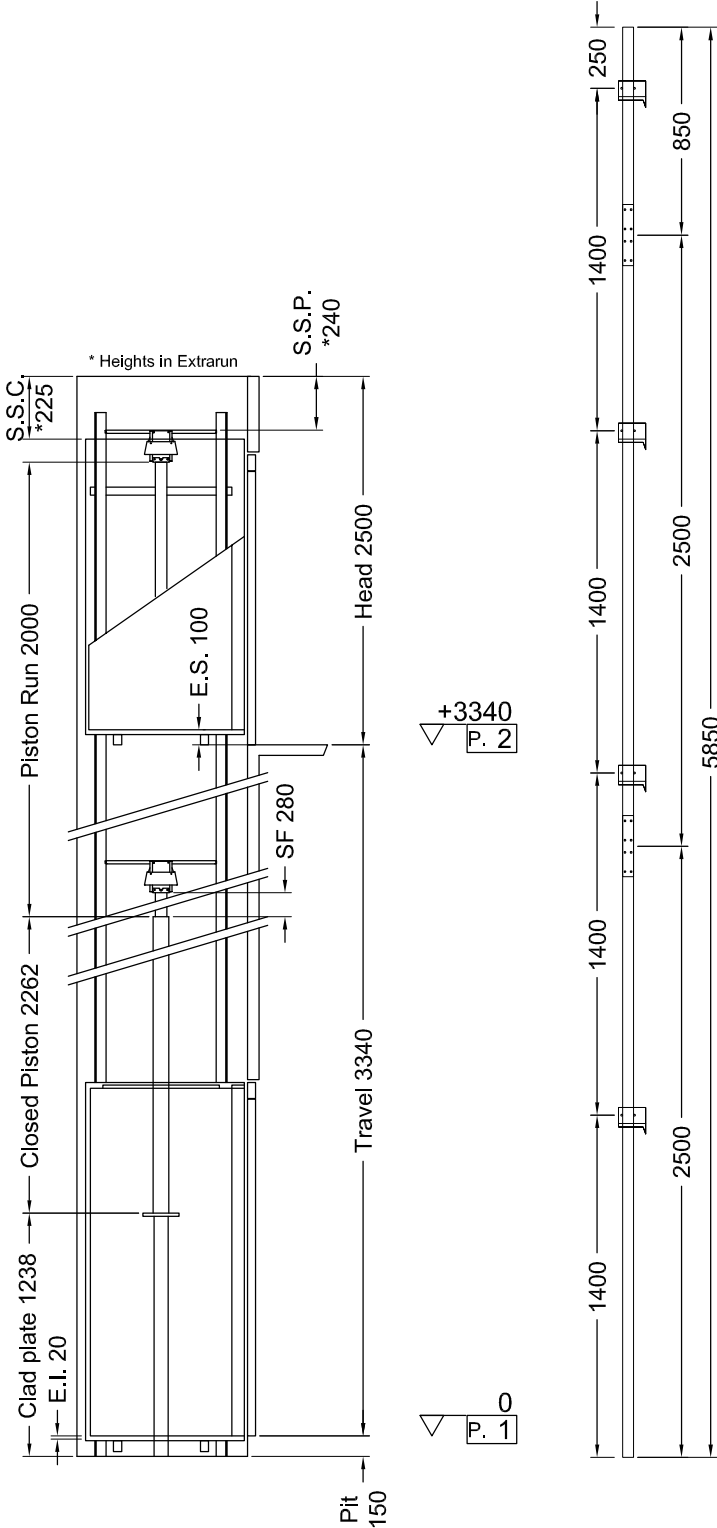

Indirect Installation	Speed 0,3 m/s	21/03/14 10.32 (V.2843)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12144	P	(N)	501
N	(N)	531	N	(N)	8127
F1	(N)	1670	F1	(N)	2784
F2	(N)	398	F2	(N)	664

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	39,16
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	21,32
SF.	Piston extraction (mm)	280	Overpressure limit (bar)	54,83
S.S.P.	Piston/head (mm)	240	Residual pressure (bar)	1,3
S.S.C.	Cabin/head (mm)	225		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	35	Runners	T70-2A
Motor (V)	MF230V	Brackets	(Nr) 4
Power (Kw)	2,9	Cables	Ø 9 mm 8-(1+9+9)
Corrente (A)	19	Cables length (mm) 2 x	9000
Piston	START Homø	Min actual breaking load (N)	51000
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	12000		
Min hydraulic oil (L)	41		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	1	Length of the hose travel	6000 (mm)
Cables enter in shaft: Side	C		

CABIN		CABIN ACCESSORIES	
Panels	Similinox F12PPS	½ Mirror	Lati B
Finishes	Inox BA mecc.	Handrail	INOX S.B., Lati B
Oper. panel	VERTICAL		
Floor	By Customer		
Ceiling	SPOTS LED - Blanco A1		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
False head device
Telephone by Lift Shop
Full height Infra-red curtain V2
Automatic Control 2011

The information contained in this drawing are completed by masonry manual rev.4 | * See masonry manual rev. 4

	Final Drawings	1° STESURA
	D.Ogliastro	18/03/14
	Final Drawings	
	SCALE	SHEET
	OUT OF SCALE	2/2