



FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		G	2 Panels F41PPS	2000	2210	F41PPS	Absent		C2
13			2 Panels F41PPS	2000	2210	F41PPS	Absent		C2
		2	2 Panels F41PPS	2000	2210	F41PPS	Panoramic	Transparent	C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

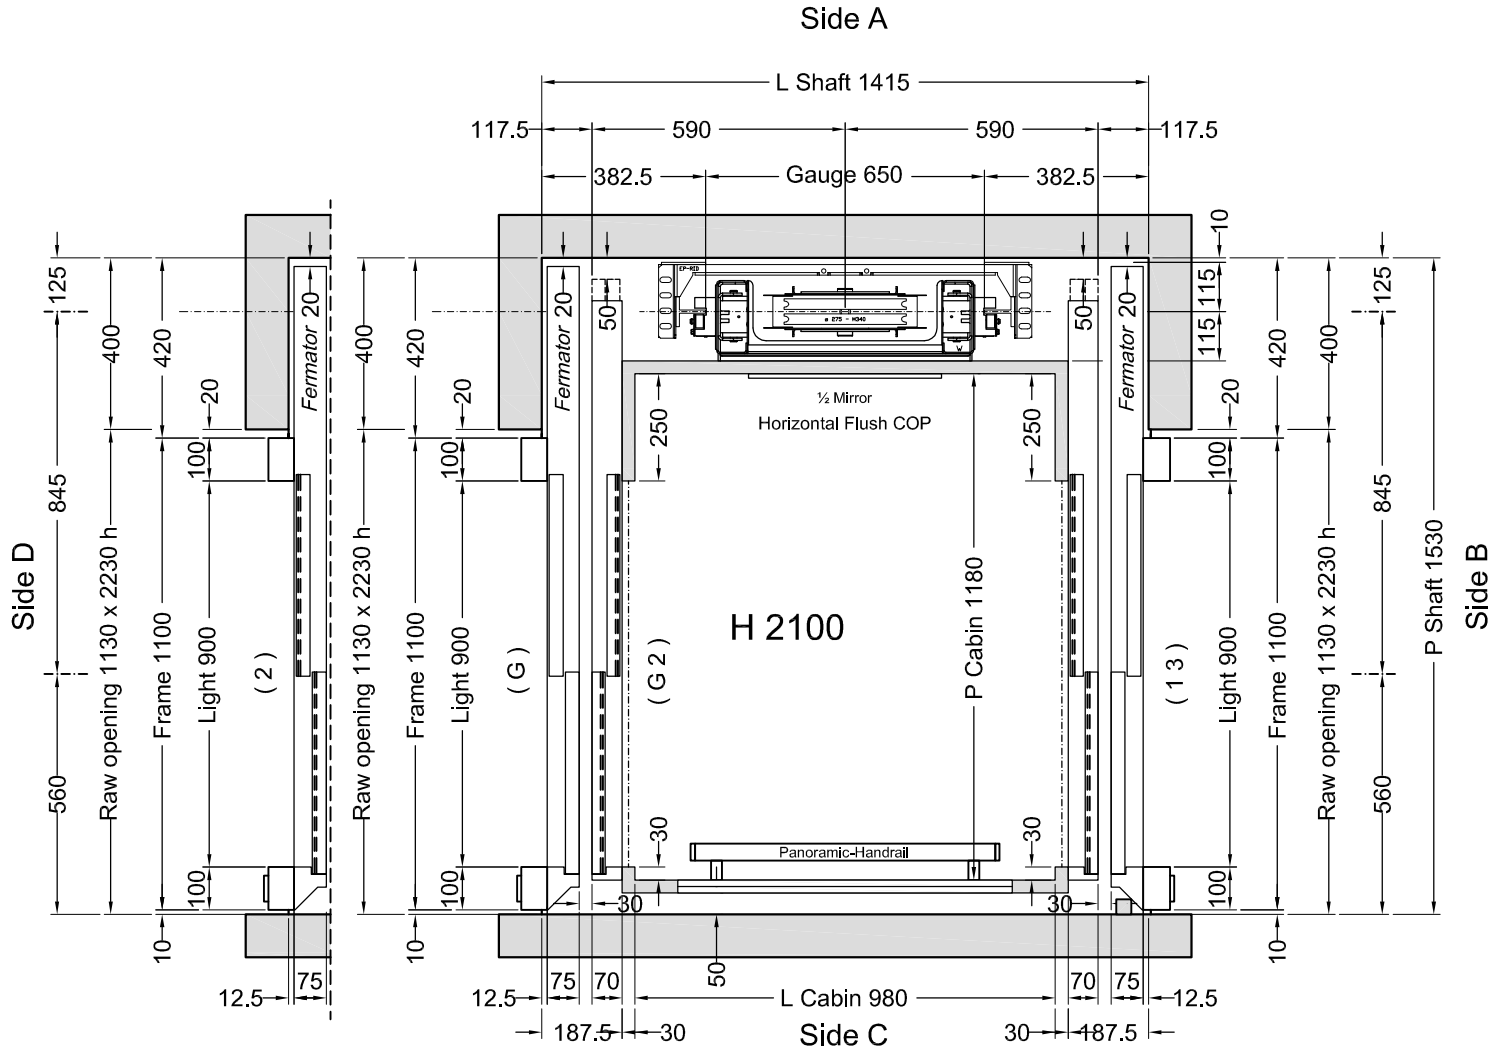

□ Column for E Cables




Feasibility n° 2316 - Wall side A + G/1

Stops: 4 - Doors: 4


Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1050 (L) x 1180 (P)** thks **20 mm** Weight: **50 kg**

		Designer	Date	Final Drawings	
		D.Ogliastro	03/09/2015	Model	SHEET
		L. Del Bianco	06/08/2015	ELFO 2	1/2
		L. Del Bianco	05/08/2015		SHEET DIMENS.
		Final Drawings	1° STESURA		A3
		L. Del Bianco	11/09/15		SCALE
					1:12.5
		CAPACITY	AREA m ²	CAPACITY	
		350 kg	1,16		

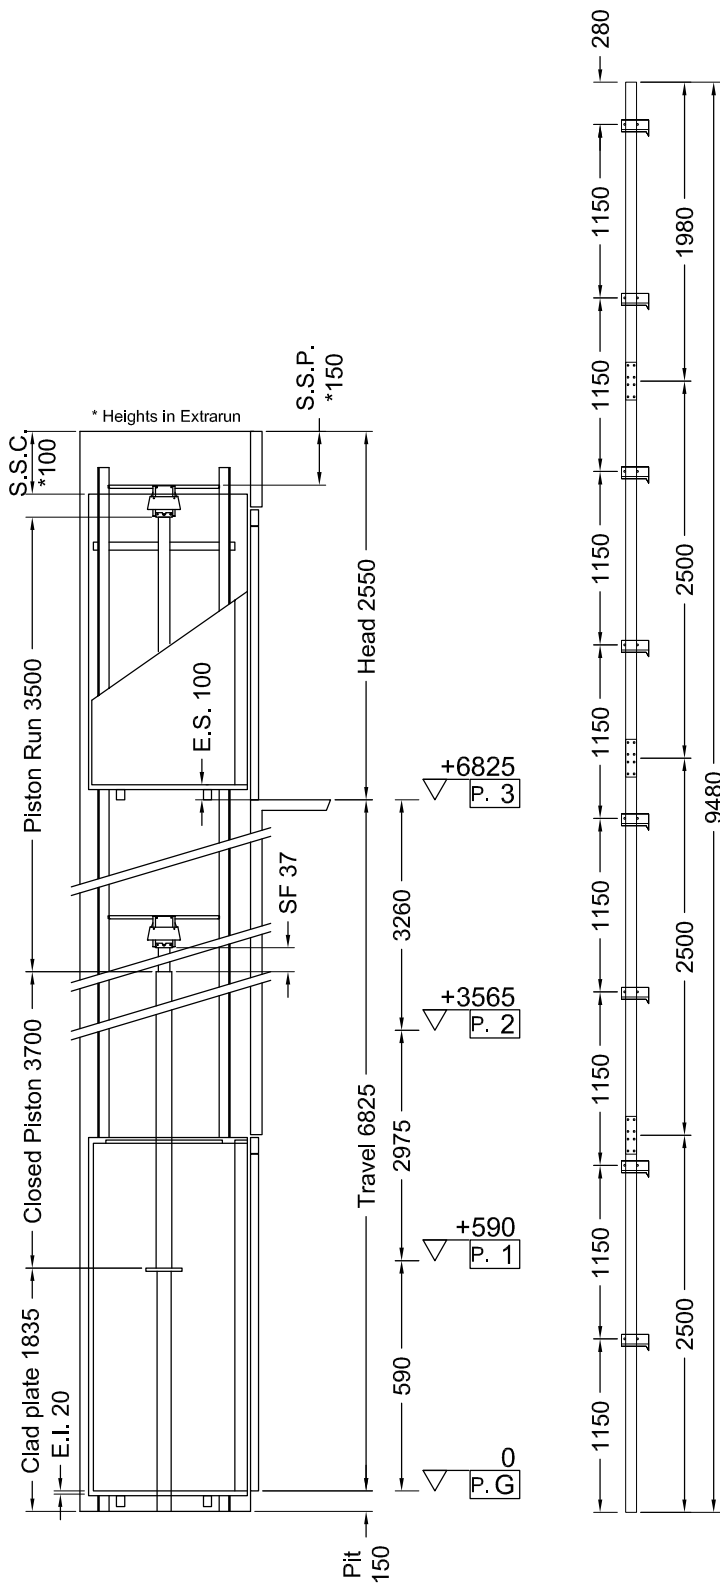

Indirect Installation		Speed 0,28 m/s	11/09/15 09.07 (V.2852)
THRUST DURING NORMAL OPERATION		THRUST OF SAFETY DEVICE INTERVENT.	
P	(N) 13860	P	(N) 710
N	(N) 905	N	(N) 9435
F1	(N) 1828	F1	(N) 3047
F2	(N) 251	F2	(N) 418
SPACES		PRESSURES	
E.I.	Extrarun below cabin (mm) 20	Max static pressure	(bar) 35,66
E.S.	Extrarun above cabin (mm) 100	Min static pressure	(bar) 22
SF.	Piston extraction (mm) 37	Overpressure limit	(bar) 49,92
S.S.P.	Piston/head (mm) 150	Residual pressure	(bar) 1,41
S.S.C.	Cabin/head (mm) 100		
HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Guide rails	70x70x9
Capacity (l/min)	43	Brackets	(Nr) 8
Motor (V)	MF230V	Ropes	\varnothing 11 mm 6-(1+9+9)
Power (Kw)	3,4	Cables length (mm) 2 x	12000
Nominal current (A)	32	Min actual breaking load (N)	70700
Piston	START SL (\varnothing) 80x5x3500		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - FD 3/4"		
Tubing lenght (mm)	9000		
Min hydraulic oil (L)	56		
SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0326	CA50.00526
Key Locks	FERMATOR	210/10/40	
MACHINERY LOCATION			
At floor	G	Length of the hose travel	5000 (mm)
Cables enter in shaft: Side	A		
CABIN	CABIN ACCESSORIES		
Panels	F41PPS	1/2 Mirror	Side A
Finishes	Inox BA mecc.	Panoramic	Side C
Oper. panel	Horizontal Flush mounted **	Handrail	Inox Lucido, Side C
Floor	By Customer	Outside covering	Side C, Roof
Ceiling	SPOTS LED - F41PPS	Outside finishing	Inox BA mecc.
Cabin Doors	Side B: 2-Panels Automatic Sliding doors, Panoramic Transparent and F41PPS Side D: 2-Panels Automatic Sliding doors, Panoramic Transparent and F41PPS		
OTHER ACCESSORIES			
Guides dimension	2.5 m	(**) Inox BA mecc.	
Manual pump			
Manostat with overweight signal			
Two speed			
Return to the lower floor after adjustable time			
False head device			
Telephone by Lift Shop			
Full height Infra-red curtain V2			
Roof covering			
Reduced outriggers			
Automatic Control 2011			
Blue Buttons			
Cabin Buttons: G 1 2 3			
Call Accetp - Emergency manual descent from cabin			
Door Open Button on C.O.P.			



Final Drawings	1° STESURA
L. Del Bianco	11/09/15
Final Drawings	
SCALE	SHEET
OUT OF SCALE	2/2