


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		G 1	Standard RAL 9003 *	2000	2100	RAL 9003 *	Large	White Milk	

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(*) No raised edges

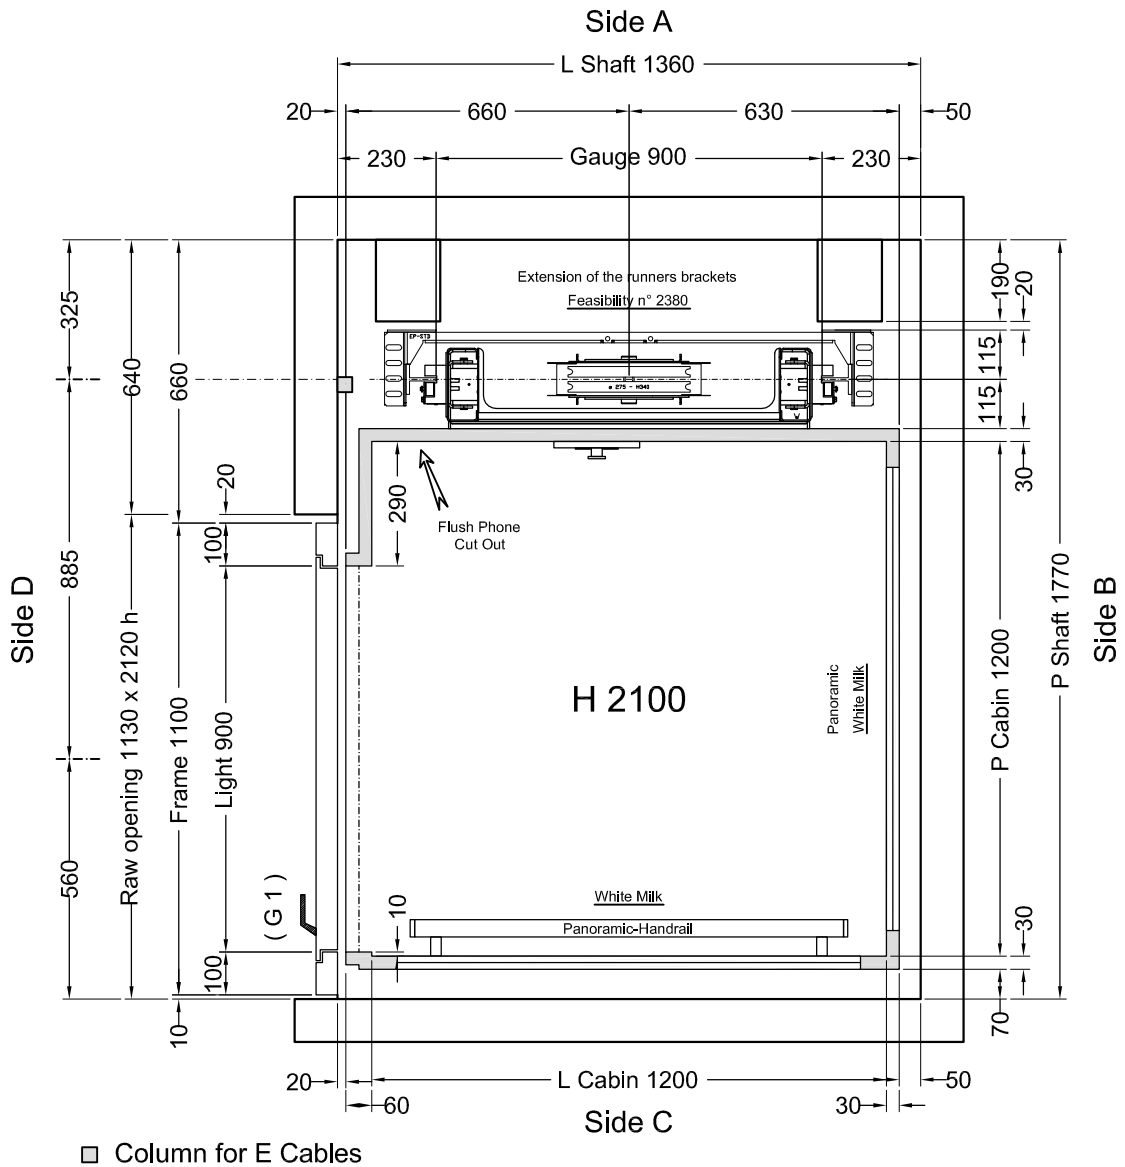


Stops: 2 - Doors: 2

Shaft in **Masonry (Muratura)**

Feasibility n° 2380 - Phone cut out - Extension of the runner brackets

		Designer	Date	Final Drawings	
		D.Tomei	15/07/2015	Model ELFO	SHEET 1/2
		D.Ogliastro	30/06/2015		
		L. Del Bianco	04/05/2015		SHEET DIMENS. A3
	(3000)	D.Tomei	27/04/2015		SCALE 1:12.5
		Final Drawings L. Del Bianco	1° STESURA 04/08/15		
		CAPACITY 400 kg	AREA m ² 1,44		CAPACITY

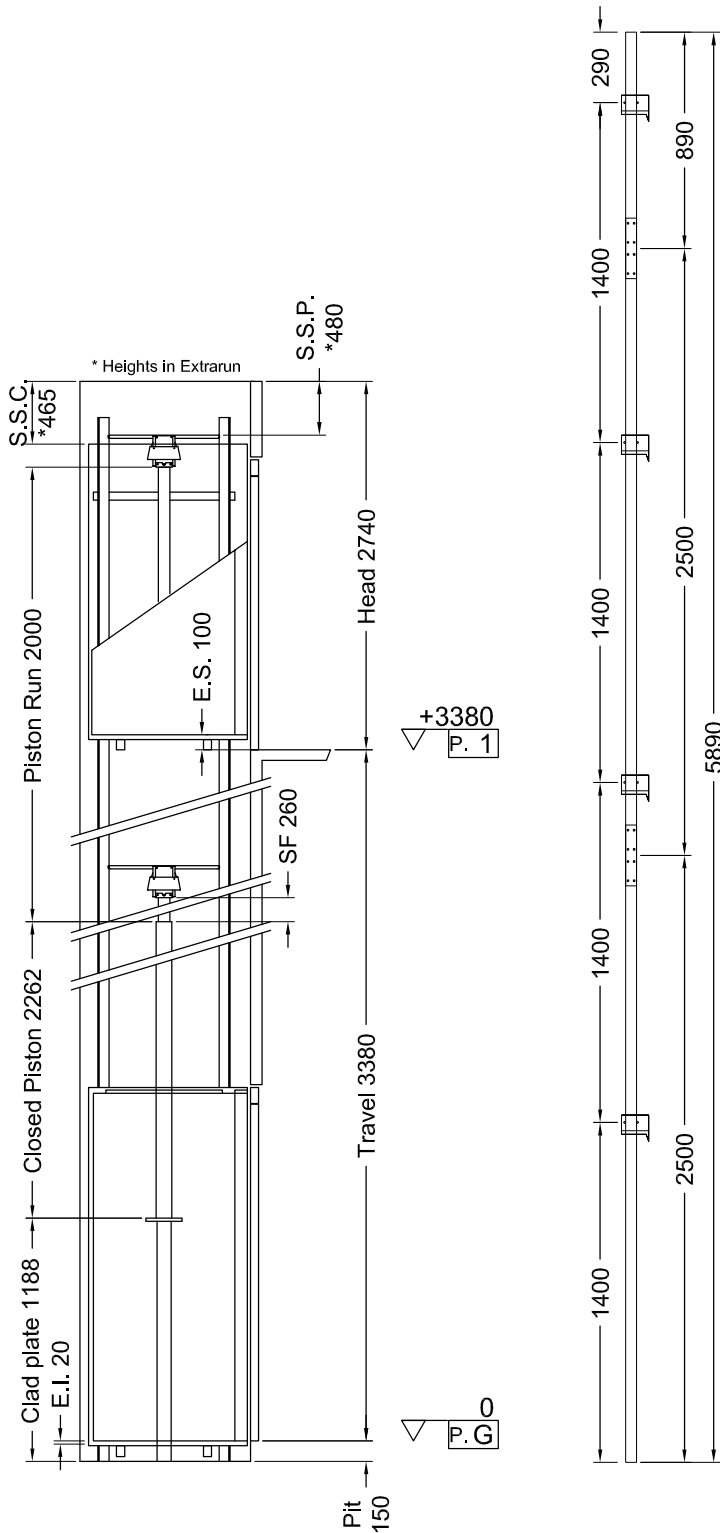

Indirect Installation		Speed 0,3 m/s	04/08/15 09.20 (V.2852)
THRUST DURING NORMAL OPERATION		THRUST OF SAFETY DEVICE INTERVENT.	
P	(N) 12330	P	(N) 550
N	(N) 595	N	(N) 8265
F1	(N) 1814	F1	(N) 3023
F2	(N) 358	F2	(N) 597
SPACES		PRESSURES	
E.I.	Extrarun below cabin (mm) 20	Max static pressure	(bar) 41,46
E.S.	Extrarun above cabin (mm) 100	Min static pressure	(bar) 21,07
SF.	Piston extraction (mm) 260	Overpressure limit	(bar) 58,05
S.S.P.	Piston/head (mm) 480	Residual pressure	(bar) 1,43
S.S.C.	Cabin/head (mm) 465		
HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Guide rails	70x70x9
Capacity (l/min)	35	Brackets	(Nr) 4
Motor (V)	MF230V	Ropes	Ø 11 mm 6-(1+9+9)
Power (Kw)	3,4	Cables length (mm) 2 x	9000
Nominal current (A)	32	Min actual breaking load (N)	70700
Piston	Start Home (Ø) 70x5x2000		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	7000		
Min hydraulic oil (L)	41		
SECURITY DEVICES		Manufacturer	Model
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	
MACHINERY LOCATION			
At floor	G	Length of the hose travel	1000 (mm)
Cables enter in shaft: Side	B		
CABIN		CABIN ACCESSORIES	
Panels	ARPA 9206 VG LUC	Panoramic	White Milk Side B, C
Finishes	Similinox F12PPS	Handrail	Inox Lucido, Side C
Oper. panel	VERTICAL (Like finishes)	Outside covering	No
Floor	ROCK SOLID 677	Outside finishing	No
Ceiling	DAMA Led Strips - Blanco A1		
OTHER ACCESSORIES			
Enabling key for the cabin button pad, double insertion			
Guides dimension 2.5 m			
Manual pump			
Manostat with overweight signal			
Two speed			
Handles CASPIM (Long)			
Telephone by Lift Shop			
Full height Infra-red curtain V2			
Automatic Control 2011			
Call Accept			
Emergency manual descent from cabin			
Cut out for flush phone 86 x 175 mm 1400 mm off floor Side A/D (F.2380)			



Final Drawings	1° STESURA
L. Del Bianco	04/08/15
Final Drawings	
SCALE	SHEET
OUT OF SCALE	2/2