


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		G 1	Standard RAL 7030*	2000	2100	RAL 7030*	Large	Transparent	C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(*) Smooth finish - No raised edges

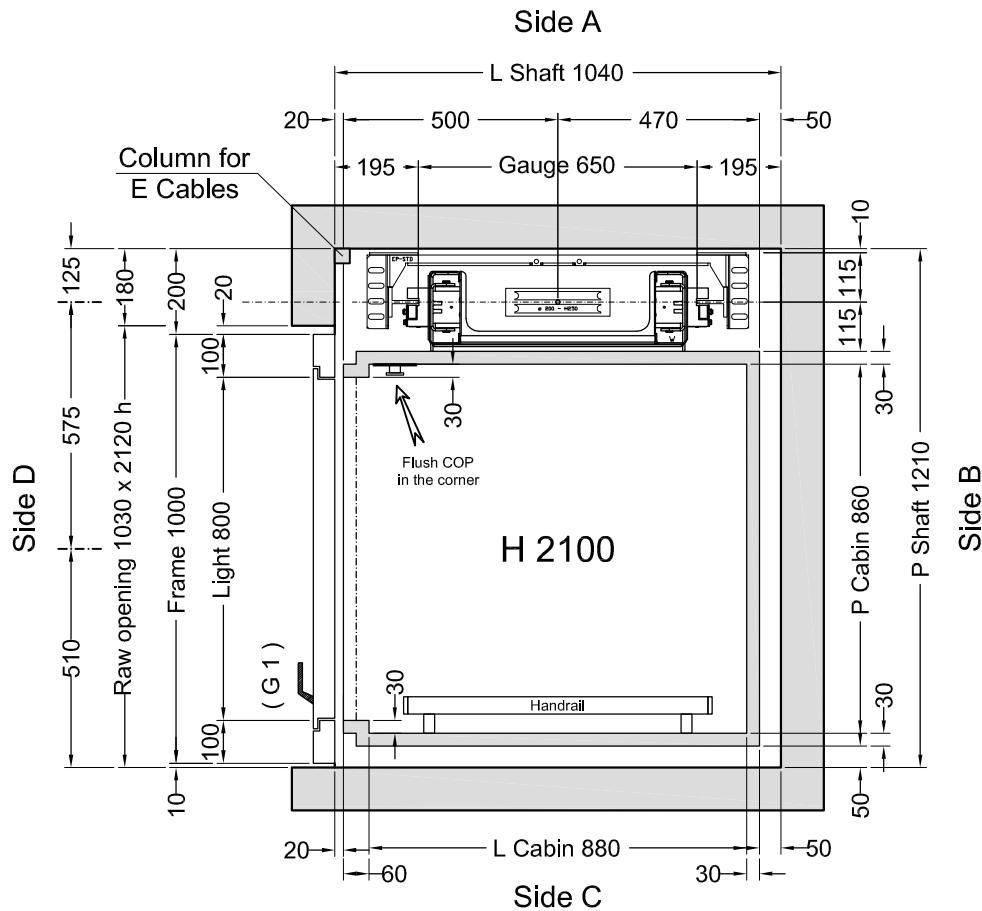


Snaps 0001

Stops: 2 - Doors: 2

Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **910** (L) x **860** (P) thks **20** mm Weight: **50** kg

			Designer	Date	Final Drawings	
			L. Del Bianco	16/04/2015	Model ELFO	SHEET 1/2
			D. Tomei	03/04/2015	 SHEET DIMENS. A3	SCALE 1:12.5
		D. Ogliaastro	04/03/2015			
			Final Drawings L. Del Bianco	1° STESURA 16/04/15		
			CAPACITY 300 kg	AREA m ² 0,76	CAPACITY	

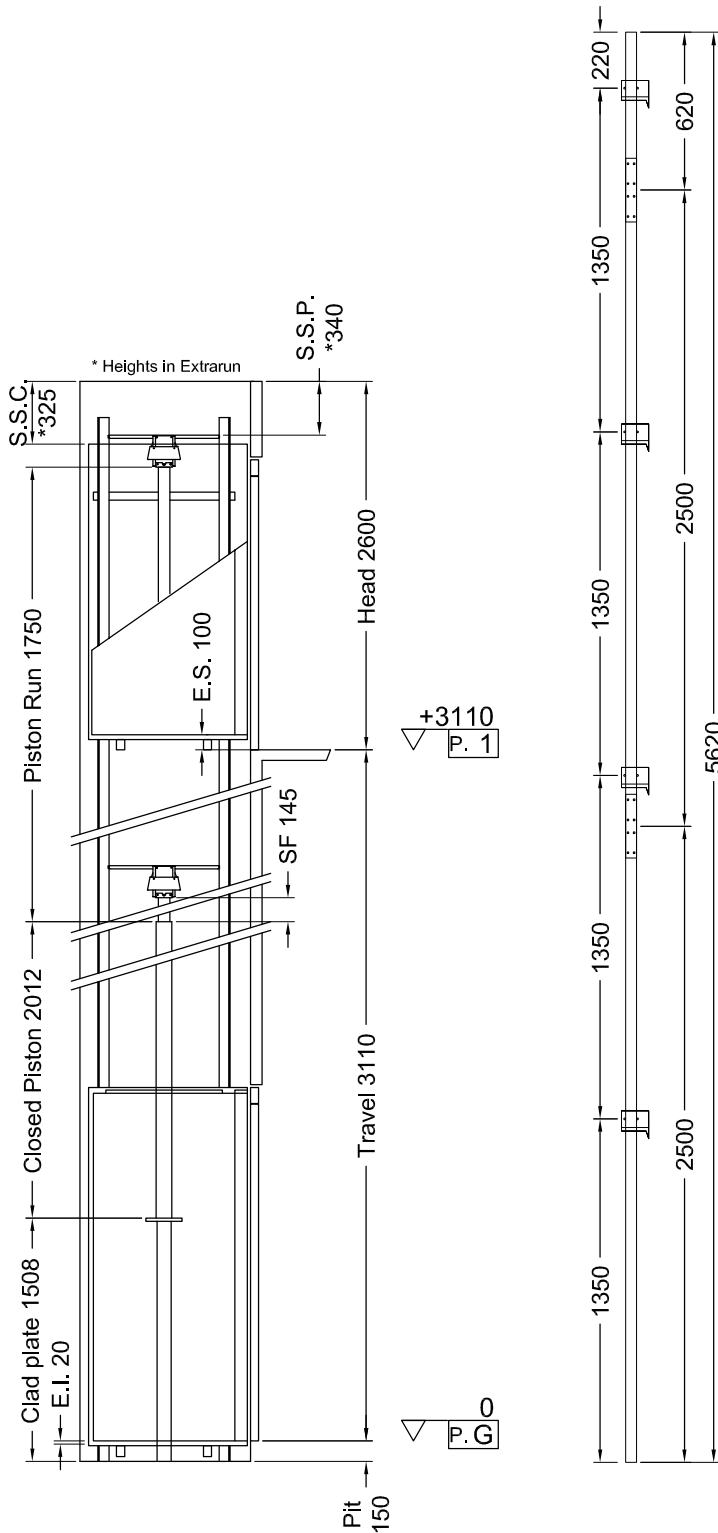

Indirect Installation Speed **0,3 m/s** 16/04/15 09.47 (V.2852)

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	9726	P	(N)	481
N	(N)	556	N	(N)	6559
F1	(N)	1090	F1	(N)	1816
F2	(N)	202	F2	(N)	337

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	32,6
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	17,31
SF.	Piston extraction (mm)	145	Overpressure limit (bar)	45,64
S.S.P.	Piston/head (mm)	340	Residual pressure (bar)	1,25
S.S.C.	Cabin/head (mm)	325		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Guide rails	70x70x9
Capacity (l/min)	35	Brackets	(Nr) 4
Motor (V)	MF230V	Ropes	Ø 9 mm 6-(1+9+9)
Power (Kw)	2,9	Cables length (mm) 2 x	9000
Nominal current (A)	27	Min actual breaking load (N)	47300
Piston	Start Home (Ø)70x5x1750		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	7000		
Min hydraulic oil (L)	39		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	G	Length of the hose travel	3000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Arpa 2012 VG SAT	Handrail	Inox S.B., Side C
Finishes	F41PPS	Outside covering	Roof
Oper. panel	VERTICAL - Flush Corner A-D	Outside finishing	F41PPS
Floor	By Customer		
Ceiling	SPOTS LED - Blanco A32PP		

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
 - Guides dimension 2.5 m
 - Manual pump
 - Manostat with overweight signal
 - Two speed
 - Handles CASPIM
 - Telephone by **Lift Shop**
 - Full height Infra-red curtain V2
 - Roof covering
 - Automatic Control 2011
 - Cabin Buttons: **G 1**

