


## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		1 2 3	2 Panels Galvanized + Rust-proof	2000	2210	Galvanized + Rust-proof	Absent		C2


C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

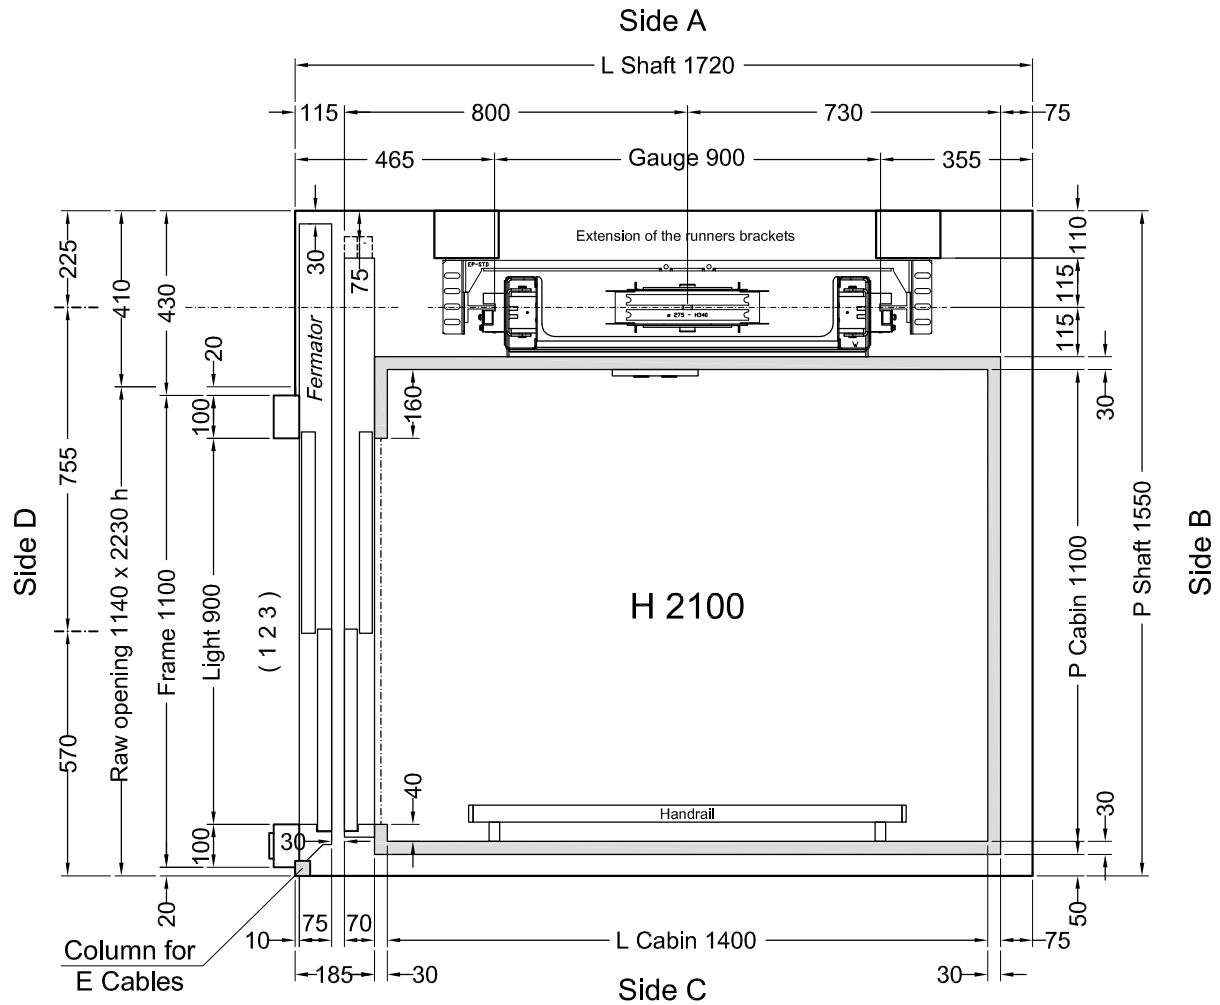


**Stops: 3 - Doors: 3**

Customer own flooring: Dimensions **1430 (L) x 1100 (P)** thks **20 mm** Weight: **40 kg**

Shaft in **Shaft at Client expense (Struttura a carico Cliente)**

		Designer	Date	Final Drawings	
				Model	SHEET
				<b>ELFO 2</b>	<b>1/2</b>
		L. Del Bianco	29/08/2014		SHEET DIMENS.
		L. Del Bianco	28/07/2014		<b>A3</b>
		Final Drawings L. Del Bianco	1° STESURA 17/06/15		SCALE <b>1:12.5</b>
		CAPACITY	AREA m <sup>2</sup>	CAPACITY	
		<b>350 kg</b>	<b>1,54</b>		

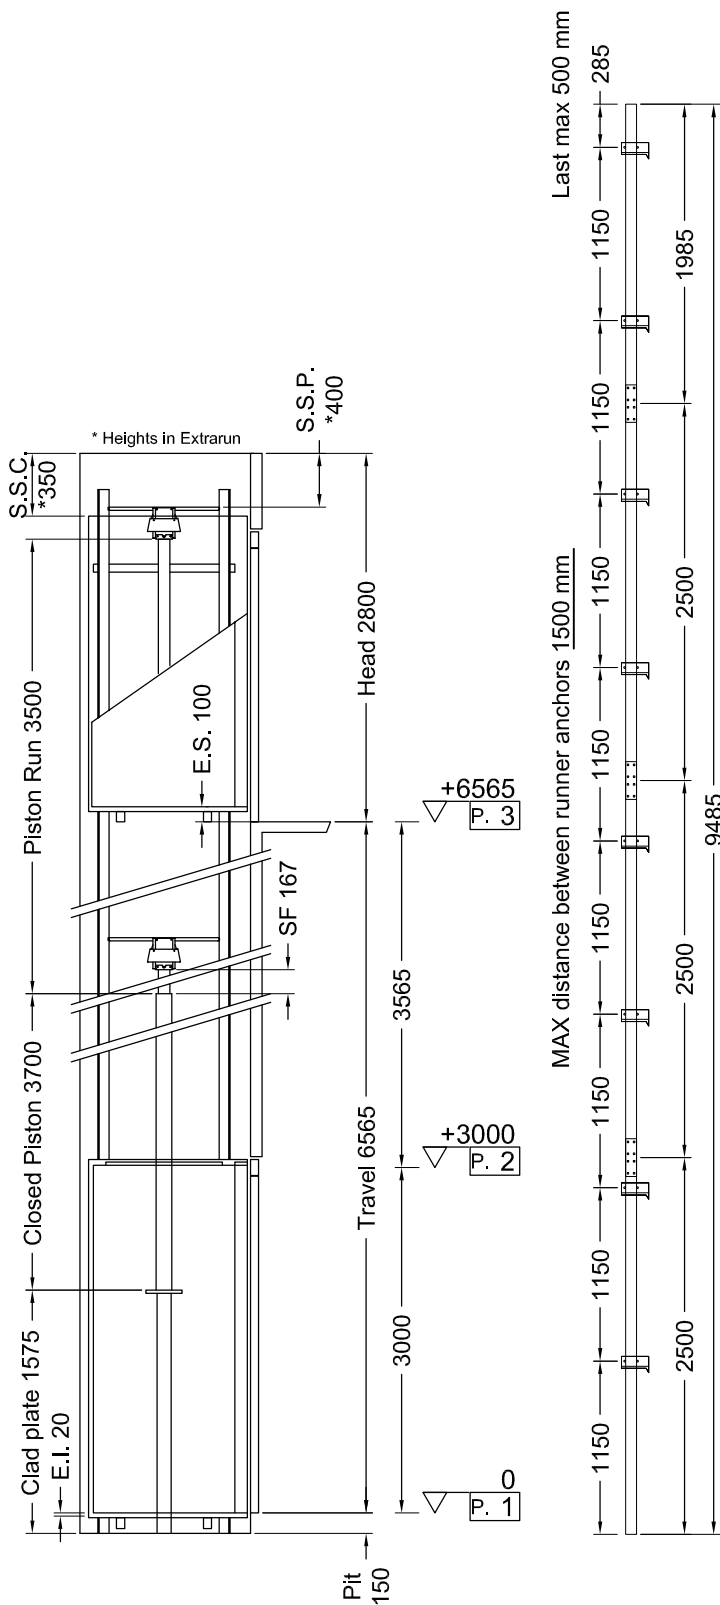

<b>Indirect Installation</b>		Speed <b>0,28 m/s</b>	17/06/15 09.47 (V.2852)
<b>THRUST DURING NORMAL OPERATION</b>		<b>THRUST OF SAFETY DEVICE INTERVENT.</b>	
P	(N) <b>13878</b>	P	(N) 710
N	(N) <b>879</b>	N	(N) 9421
F1	(N) <b>1744</b>	F1	(N) 2907
F2	(N) <b>374</b>	F2	(N) 623
<b>SPACES</b>		<b>PRESSURES</b>	
E.I.	Extrarun below cabin (mm) <b>20</b>	Max static pressure	(bar) <b>34,34</b>
E.S.	Extrarun above cabin (mm) <b>100</b>	Min static pressure	(bar) <b>20,68</b>
SF.	Piston extraction (mm) <b>167</b>	Overpressure limit	(bar) <b>48,08</b>
S.S.P.	Piston/head (mm) <b>400</b>	Residual pressure	(bar) <b>1,41</b>
S.S.C.	Cabin/head (mm) <b>350</b>		
<b>HYDRAULIC UNIT</b>		<b>MECHANICAL PARTS</b>	
Central unit	<b>GMV HL 3010 (-*)</b>	Guide rails	<b>70x70x9</b>
Capacity (l/min)	<b>43</b>	Brackets	(Nr) <b>8</b>
Motor (V)	<b>MF230V</b>	Ropes	Ø <b>11 mm 6-(1+9+9)</b>
Power (Kw)	<b>3,4</b>	Cables length (mm) 2 x	<b>12000</b>
Nominal current (A)	<b>32</b>	Min actual breaking load (N)	<b>70700</b>
Piston	<b>START SL (ø)80x5x3500</b>		
Opt. oil position	<b>BASSO</b>		
Tubing	<b>3/4" EN 853 1SN - FD 3/4" - FD 3/4"</b>		
Tubing length (mm)	<b>7000</b>		
Min hydraulic oil (L)	<b>55</b>		
<b>SECURITY DEVICES</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Certificate</b>
Safety Gear	<b>PFB</b>	<b>BP1</b>	<b>TÜV AFV515</b>
Block Valve	<b>START ELEVATOR</b>	<b>1/2" 0326</b>	<b>CA50.00526</b>
Key Locks	<b>FERMATOR</b>	<b>210/10/40</b>	
<b>MACHINERY LOCATION</b>			
At floor	<b>1</b>	Length of the hose travel	<b>2500 (mm)</b>
Cables enter in shaft: Side	<b>A</b>		
<b>CABIN</b>	<b>CABIN ACCESSORIES</b>		
Panels	<b>Galvanized sheet</b>	Handrail	<b>Inox Lucido, Side C</b>
Finishes	<b>Galvanized sheet</b>		
Oper. panel	<b>VERTICAL (Like finishes)</b>		
Floor	<b>By Customer</b>		
Ceiling	<b>SPOTS LED - Blanco A1</b>		
Cabin Doors	<b>Side D: 2-Panels Automatic Sliding doors, Galvanized + Rust-proof</b>		
<b>OTHER ACCESSORIES</b>			
Enabling key for the cabin button pad, double insertion			
Guides dimension 2.5 m			
Manual pump			
Manostat with overweight signal			
Two speed			
Return to the lower floor after adjustable time			
Telephone by Lift Shop			
Full height Infra-red curtain V2			
Landing buttons Braille			
Automatic Control 2011			
Door Open Button on C.O.P.			