




**ACCESSORI:**

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Parte meccanica verniciata RAL 9005
- Gulde In barre da 2,5 m
- Pistone verniciato RAL 9005
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Maniglie CASPIM
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Allimentazione motore 400V
- Carter Tetto cabina
- Manovra Automatica 2011
- Pulsanti Cabina: **B G**

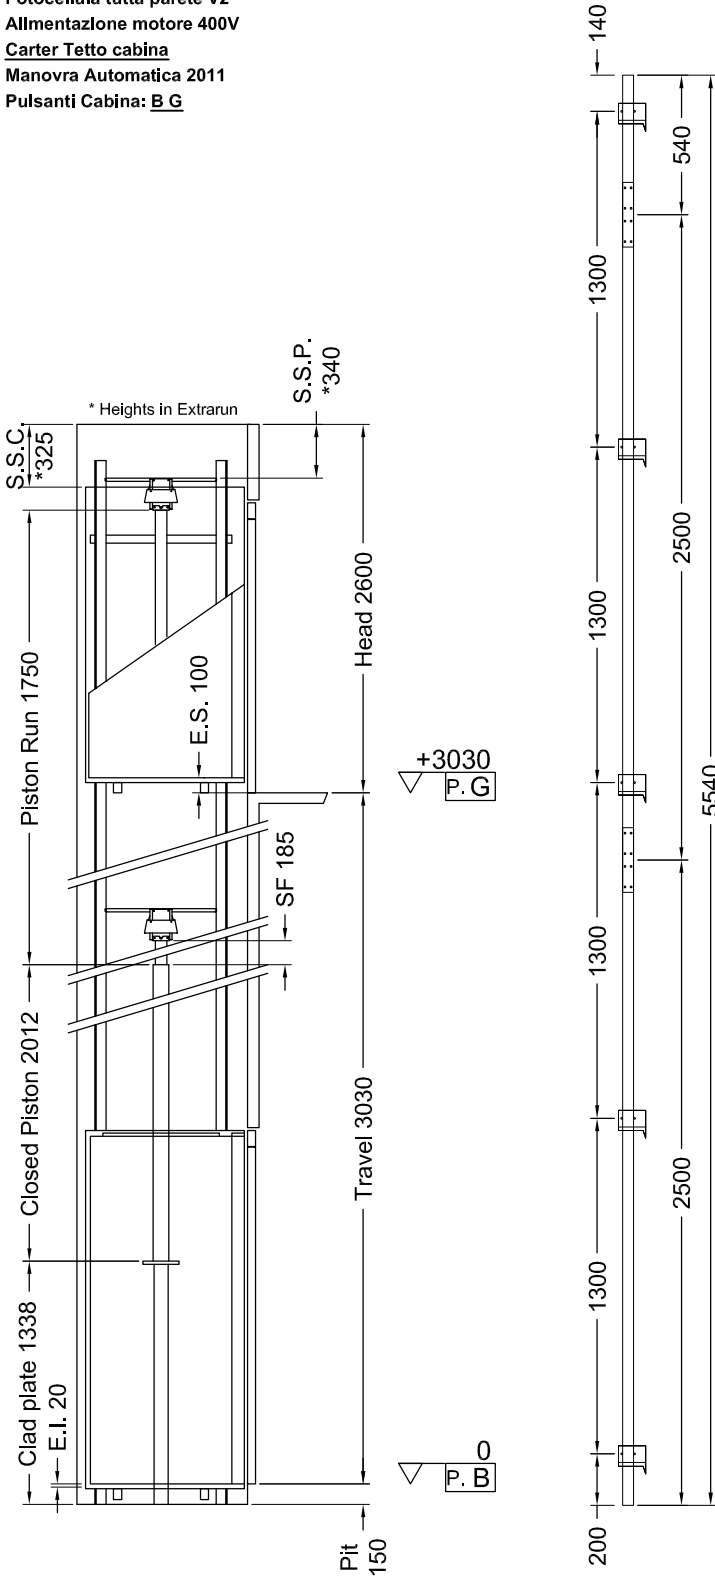

<b>Indirect Installaton</b>		Speed <b>0,3 m/s</b>	03/02/15 17.13 (V.2851)
<b>THRUST DURING NORMAL OPERATION</b>		<b>THRUST OF SAFETY DEVICE INTERVENT.</b>	
P	(N) <b>10919</b>	P	(N) 530
N	(N) <b>513</b>	N	(N) 7262
F1	(N) <b>1526</b>	F1	(N) 2544
F2	(N) <b>357</b>	F2	(N) 595
<b>SPACES</b>		<b>PRESSURES</b>	
E.I.	Extrarun below cabin (mm) <b>20</b>	Max static pressure	(bar) <b>33,29</b>
E.S.	Extrarun above cabin (mm) <b>100</b>	Min static pressure	(bar) <b>18</b>
SF.	Piston extraction (mm) <b>185</b>	Overpressure limit	(bar) <b>46,61</b>
S.S.P.	Piston/head (mm) <b>340</b>	Residual pressure	(bar) <b>1,38</b>
S.S.C.	Cabin/head (mm) <b>325</b>		
<b>HYDRAULIC UNIT</b>		<b>MECHANICAL PARTS</b>	
Central unit	<b>GMV HL 3010 (-*)</b>	Guide rails	<b>T70-2A</b>
Capacity (l/min)	<b>35</b>	Brackets	(Nr) <b>5</b>
Motor (V)	<b>TF400V</b>	Ropes	$\varnothing$ <b>9 mm 6-(1+9+9)</b>
Power (Kw)	<b>2,9</b>	Cables length (mm) 2 x	<b>9000</b>
Nominal current (A)	<b>11</b>	Min actual breaking load (N)	<b>47300</b>
Piston	<b>Start Home</b> ( $\varnothing$ ) <b>70x5x1750</b>		
Opt. oil position	<b>BASSO</b>		
Tubing	<b>3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"</b>		
Tubing length (mm)	<b>5000</b>		
Min hydraulic oil (L)	<b>39</b>		
<b>SECURITY DEVICES</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Certificate</b>
Safety Gear	<b>PFB</b>	<b>BP1</b>	<b>TÜV AFV515</b>
Block Valve	<b>START ELEVATOR</b>	<b>1/2" 0327</b>	<b>CA50.00525</b>
Key Locks	<b>Prudhomme</b>	<b>PLT/L/CPX NL 11-400-1002-125-02</b>	
<b>MACHINERY LOCATION</b>			
At floor	<b>B</b>	Length of the hose travel	<b>1000 (mm)</b>
Cables enter in shaft: Side	<b>A</b>		
<b>CABIN</b>	<b>CABIN ACCESSORIES</b>		
Panels	<b>Arpa 0509 vg LUC</b>	1/2 Mirror	<b>Side C</b>
Finishes	<b>Inox BA mecc.</b>	Outside covering	<b>Roof</b>
Oper. panel	<b>VERTICAL (Like finishes)</b>	Outside finishing	<b>Antracite N4</b>
Floor	<b>ROCK SOLID 671</b>		
Ceiling	<b>LABIRINT Led Strlps - Inox BA mecc.</b>		
<b>OTHER ACCESSORIES</b>			
Enabling key for the cabin button pad, double insertion			
Mechanic painted RAL 9005			
Guldes dimension 2.5 m			
Piston painted RAL 9005			
Manual pump			
Manostat with overweight signal			
Two speed			
Handles CASPIM			
Telephone by Lift Shop			
Full height Infra-red curtain V2			
Power supply 400V			
<u>Roof covering</u>			
Automatic Control 2011			
Cabin Buttons: <b>B G</b>			



Final Drawings	1° STESURA
L. Del Bianco	03/02/15
<b>Final Drawings</b>	
SCALE	SHEET
OUT OF SCALE	2/2