


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
	G		Standard Rust-proof	2000	2140	Rust-proof	Panoramic	Transparent	Ditec - C2
	1 2		Standard Rust-proof	2000	2100	Rust-proof	Panoramic	Transparent	C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(*) Smooth finish - No raised edges

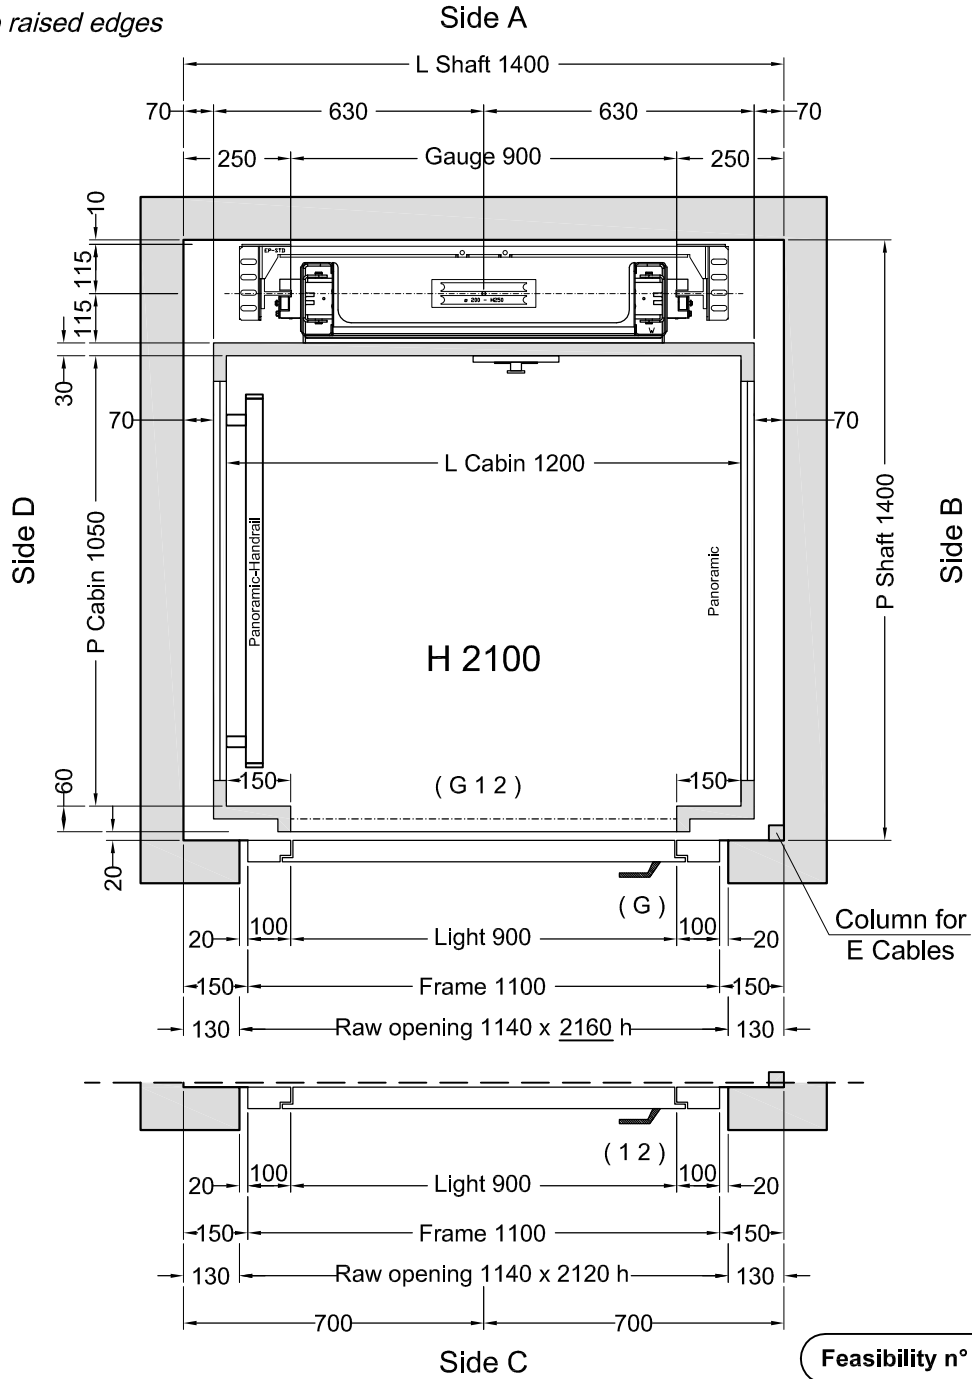

2
1
G

Feasibility n° 1900 - Ditec Level G


Stops: 3 - Doors: 3

St ft' M (M t)

Customer own flooring: Dimensions 1200 (L) x 1080 (P) thks 15 mm Weight: 22 kg

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Ditec Plano G**
- Dispositivo falsa testata
- Maniglie CASPIM
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011
- Pulsanti: G 1 2**

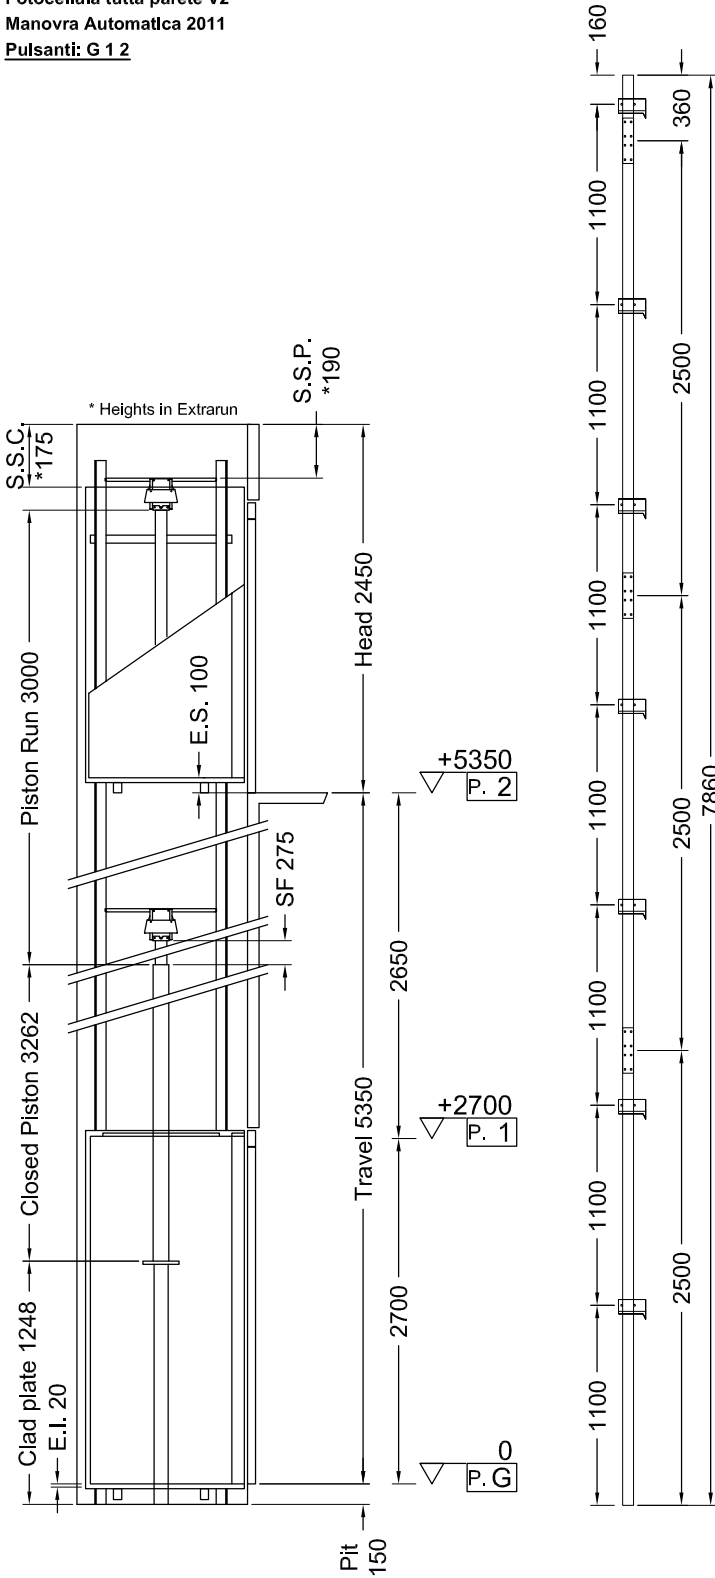

Indirect Installation	Speed 0,3 m/s	16/01/14 14.28 (V.2835)
-----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	11036	P	(N)	579
N	(N)	706	N	(N)	7484
F1	(N)	1458	F1	(N)	2430
F2	(N)	275	F2	(N)	459

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	36,23
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	20,93
SF.	Piston extraction (mm)	275	Overpressure limit (bar)	50,72
S.S.P.	Piston/head (mm)	190	Residual pressure (bar)	1,51
S.S.C.	Cabin/head (mm)	175		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Runners	T70-2A
Capacity (l/min)	35	Brackets	(Nr) 7
Motor (V)	MF230V	Cables	Ø 9 mm 6-(1+9+9)
Power (Kw)	2,9	Cables length (mm) 2 x	11000
Corrente (A)	19	Min actual breaking load (N)	47300
Piston	START Homø 70x5x3000		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	10000		
Min hydraulic oil (L)	46		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	LVT	LVT11	TUV DPD 010
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	TIEFFE	TIEFFE2000	IMQ I0110

MACHINERY LOCATION			
At floor	G	Length of the hose travel	6000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Bianco A1	Panoramic	Lati B,D
Finishes	Bianco A1	Handrail	INOX S.B., Lati D
Oper. panel	VERTICAL	Outside covering	Side B,D, C
Floor	By Customer	Outside finishing	Inox Scotch Brtte
Roof	DAMA - Bianco A1		

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
 - Guides dimension 2.5 m
 - Manual pump
 - Manostat with overweight signal
 - Two speed
 - Ditec Level G**
 - False head device
 - Handles CASPIM
 - Telephone by Lift Shop
 - Full height Infra-red curtain V2
 - Automatic Control 2011
 - Buttons: G 1 2**

