


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
		G 1	2 Panels Similinox F12PPS	2000	2210	Similinox F12PPS	Absent		C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

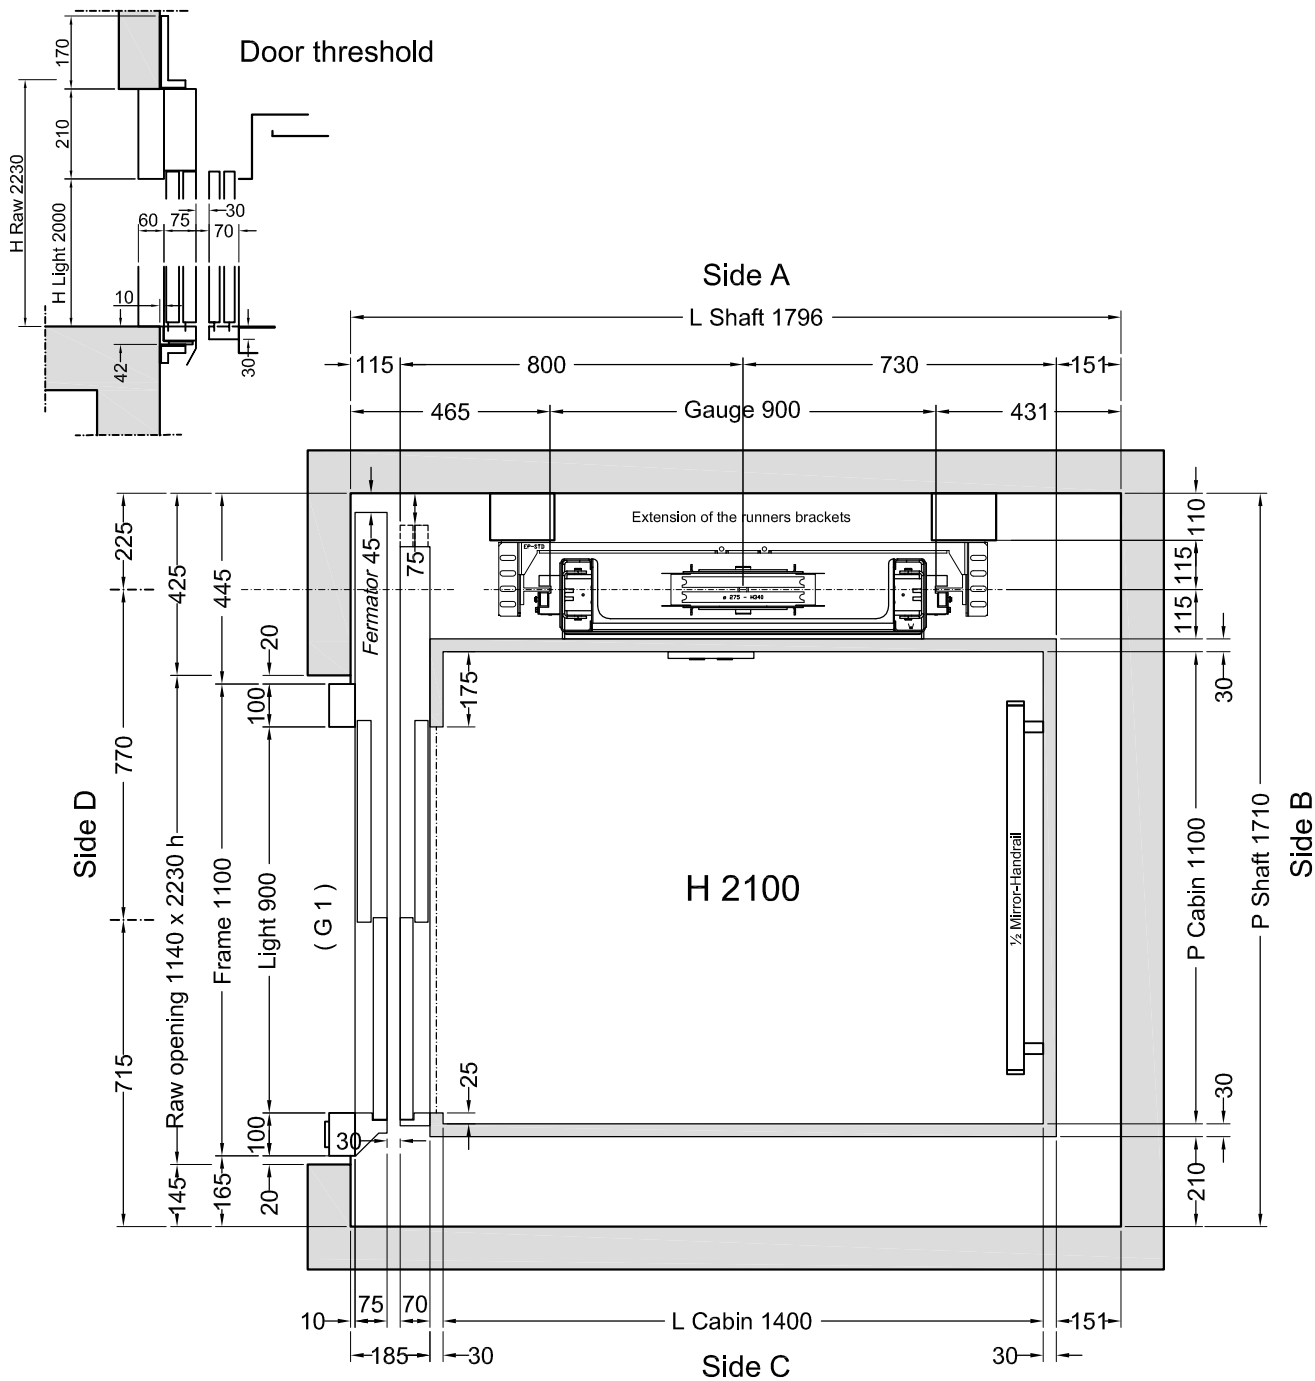


Stops: 2 - Doors: 2

Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1430 (L) x 1100 (P)** thks **15 mm** Weight: **50 kg**

		Designer	Date	Final Drawings	
				Model	SHEET
				ELFO 2	1/2
		D.Tomei	29/04/2015	SHEET DIMENS.	SCALE
		Final Drawings L. Del Bianco	1° STESURA 14/05/15		A3 1:12.5
		CAPACITY	AREA m ²	CAPACITY	
		350 kg	1,54		

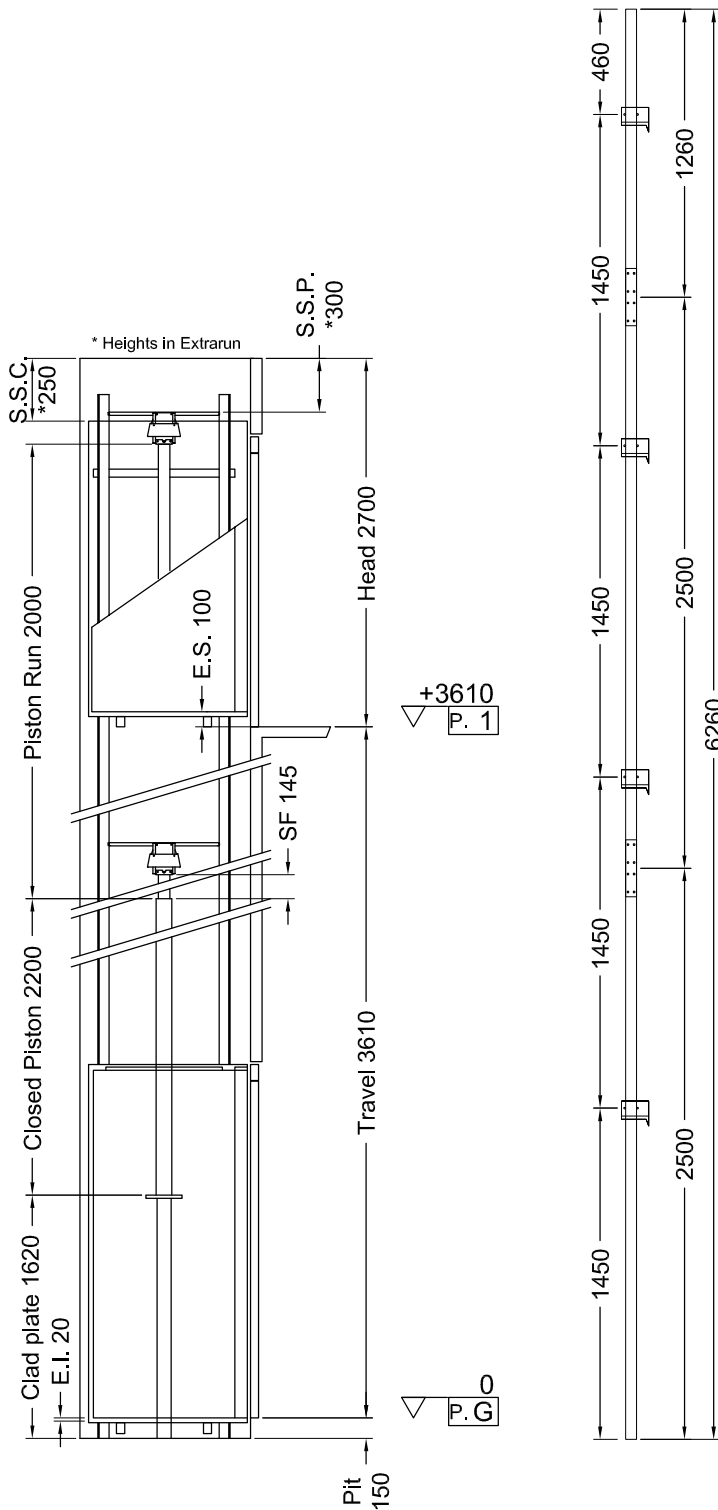

Indirect Installation Speed **0,30 m/s** 14/05/15 11.21 (V.2852)

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	13851	P	(N)	574
N	(N)	613	N	(N)	9273
F1	(N)	1766	F1	(N)	2944
F2	(N)	374	F2	(N)	623

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	34,41
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	20,75
SF.	Piston extraction (mm)	145	Overpressure limit (bar)	48,17
S.S.P.	Piston/head (mm)	300	Residual pressure (bar)	1,14
S.S.C.	Cabin/head (mm)	250		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	43	Guide rails	70x70x9
Motor (V)	MF230V	Brackets	(Nr) 4
Power (Kw)	3,4	Ropes	Ø 11 mm 6-(1+9+9)
Nominal current (A)	32	Cables length (mm) 2 x	9000
Piston	START SL (Ø)80x5x2000	Min actual breaking load (N)	70700
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - FD 3/4"		
Tubing length (mm)	6000		
Min hydraulic oil (L)	44		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0326	CA50.00526
Key Locks	FERMATOR	210/10/40	

MACHINERY LOCATION			
At floor	G	Length of the hose travel	2000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Similinox F12PPS	½ Mirror	Side B
Finishes	Inox Scotch Brite	Handrail	Inox S.B., Side B
Oper. panel	VERTICAL (Like finishes)		
Floor	By Customer		
Ceiling	LABIRINT Led Strips - Similinox F12PPS		
Cabin Doors	Side D: 2-Panels Automatic Sliding doors, Similinox F12PPS		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Door Open Button on C.O.P.
False head device
Telephone by Lift Shop
Full height infra-red curtain V2
Automatic Control 2011
Cabin Buttons: G 1
Blue Buttons
Call Accept