


## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
1 2 3			2 Panels Inox Scotch Brite	2000	2210	Inox Scotch Brite	Panoramic	Transparent	<u>Icaro Display</u>

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

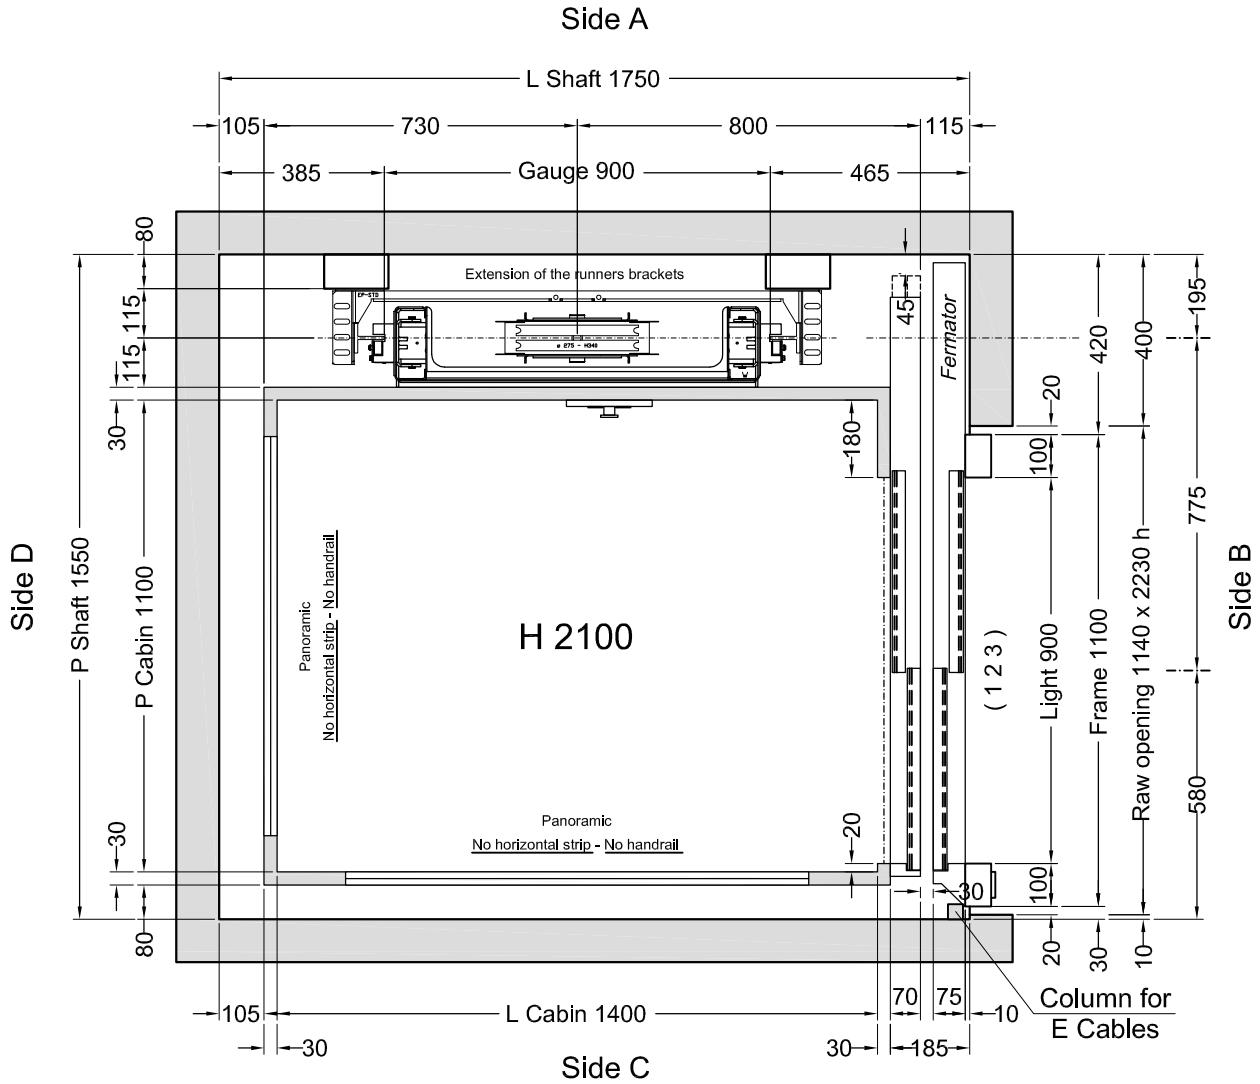

**Feasibility n° 2033 - Pan. No h. strip/handrail**

**Stops: 3 - Doors: 3**


Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1430 (L) x 1100 (P)** thks **20 mm** Weight: **27 kg**

		Designer	Date	<b>Final Drawings</b>	
		L. Del Bianco	18/07/2014	Model <b>ELFO 2</b>	SHEET 1/2
		L. Del Bianco	07/07/2014		SHEET DIMENS. <b>A3</b>
	L. Del Bianco	24/06/2014	SCALE <b>1:12.5</b>		
		Final Drawings L. Del Bianco	1° STESURA 18/07/14	CAPACITY	CAPACITY
				<b>350 kg</b>	<b>1,54</b>

**ACCESSORI:**

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Parte meccanica verniciata RAL 9005
- Gulde In barre da 2,5 m
- Pistone verniciato RAL 9005
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Pulsantiera cabina con pulsante apriporta
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Display DEDALO In cabina
- Manovra Automatica 2011

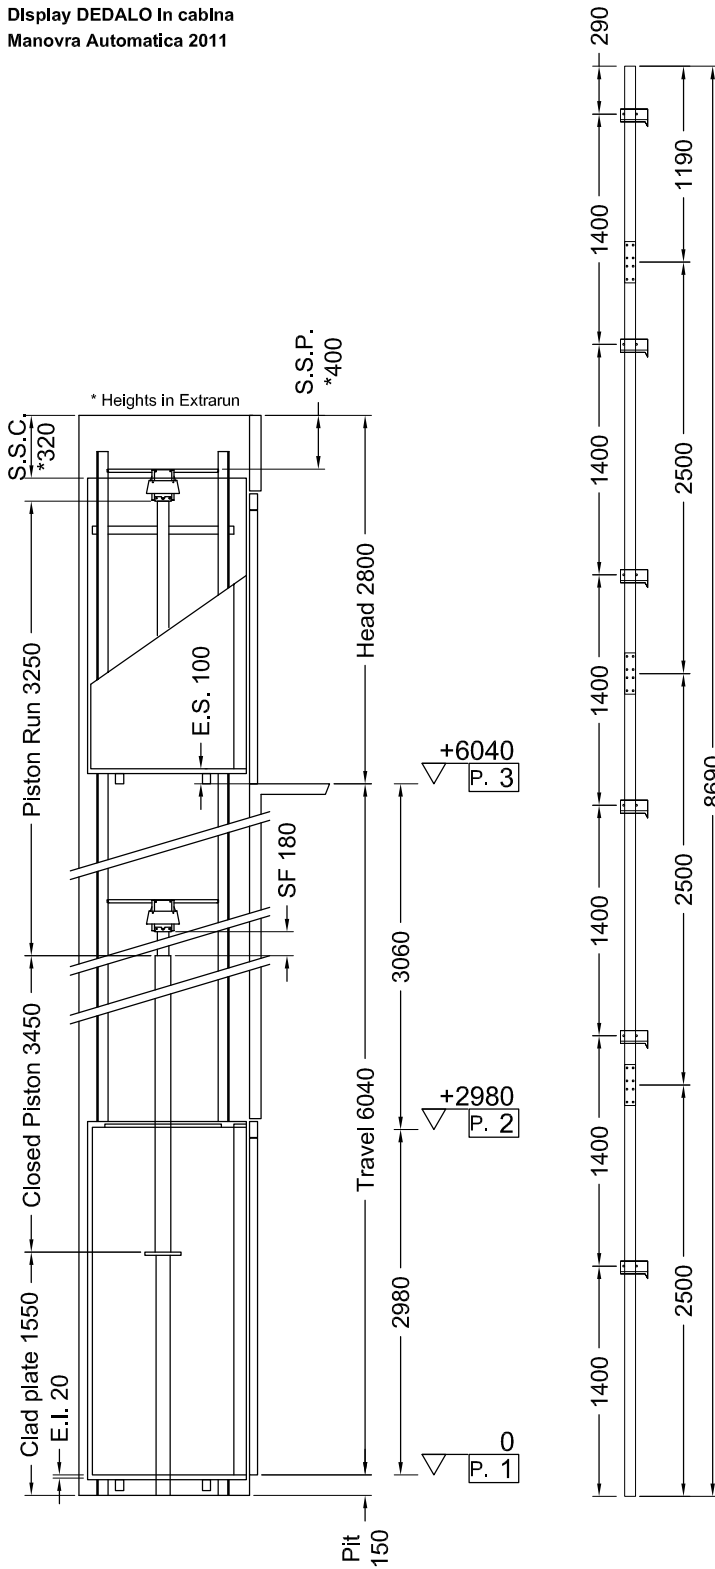

Indirect Installation	Speed 0,30 m/s	18/07/14 09.32 (V.2846)
-----------------------	----------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	14676	P	(N)	687
N	(N)	799	N	(N)	9895
F1	(N)	1848	F1	(N)	3080
F2	(N)	374	F2	(N)	623

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	36,48
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	22,82
SF.	Piston extraction (mm)	180	Overpressure limit (bar)	51,07
S.S.P.	Piston/head (mm)	400	Residual pressure (bar)	1,37
S.S.C.	Cabin/head (mm)	320		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	<b>GMV HL 3010 (-*)</b>	Runners	<b>T70-2A</b>
Capacity (l/min)	<b>43</b>	Brackets	(Nr) <b>6</b>
Motor (V)	<b>MF230V</b>	Cables	Ø <b>11 mm 6-(1+9+9)</b>
Power (Kw)	<b>2,9</b>	Cables length (mm) 2 x	<b>12000</b>
Corrente (A)	<b>19</b>	Min actual breaking load (N)	<b>70700</b>
Piston	<b>START SL (ø) 80x5x3250</b>		
Opt. oil position	<b>BASSO</b>		
Tubing	<b>3/4" EN 853 1SN - FD 3/4" - FD 3/4"</b>		
Tubing length (mm)	<b>5000</b>		
Min hydraulic oil (L)	<b>53</b>		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	<b>PFB</b>	<b>BP1</b>	<b>TÜV AFV515</b>
Block Valve	<b>START ELEVATOR</b>	<b>1/2" 0326</b>	<b>CA50.00526</b>
Key Locks	<b>Prudhomme</b>	<b>PLT/L/CPX NL 11-400-1002-125-02</b>	

MACHINERY LOCATION			
At floor	<b>1</b>	Length of the hose travel	<b>1000 (mm)</b>
Cables enter in shaft: Side	<b>A</b>		

CABIN		CABIN ACCESSORIES	
Panels	<b>Inox Scotch Brite</b>	Panoramic **	<b>Side C, D</b>
Finishes	<b>Inox Scotch Brite</b>	Outside covering	<b>Side C, D</b>
Oper. panel	<b>VERTICAL (Like finishes)</b>	Outside finishing	<b>Inox Scotch Brite</b>
Floor	<b>By Customer</b>		
Ceiling	<b>LABIRINT - Inox Scotch Brite</b>	(**) <b>No horizontal strip</b>	
Cabin Doors	<b>Side B: 2-Panels Automatic Sliding doors, Inox Scotch Brite Panoramic clear glass</b>		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Mechanic painted RAL 9005
Guldes dimension 2.5 m
Piston painted RAL 9005
Manual pump
Manostat with overweight signal
Two speed
<u>Door Open Button on C.O.P.</u>
<u>Telephone by Lift Shop</u>
<u>Full height Infra-red curtain V2</u>
<u>DEDALO display in cabin</u>
<u>Automatic Control 2011</u>

Final Drawings L. Del Bianco	1° STESURA 10/07/14
<b>Final Drawings</b>	
SCALE OUT OF SCALE	SHEET 2/2