


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
1 2 3			2 Panels <u>Inox Nero Satinato</u>	2000	2210	<u>Inox Nero Satinato</u>	Absent		

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

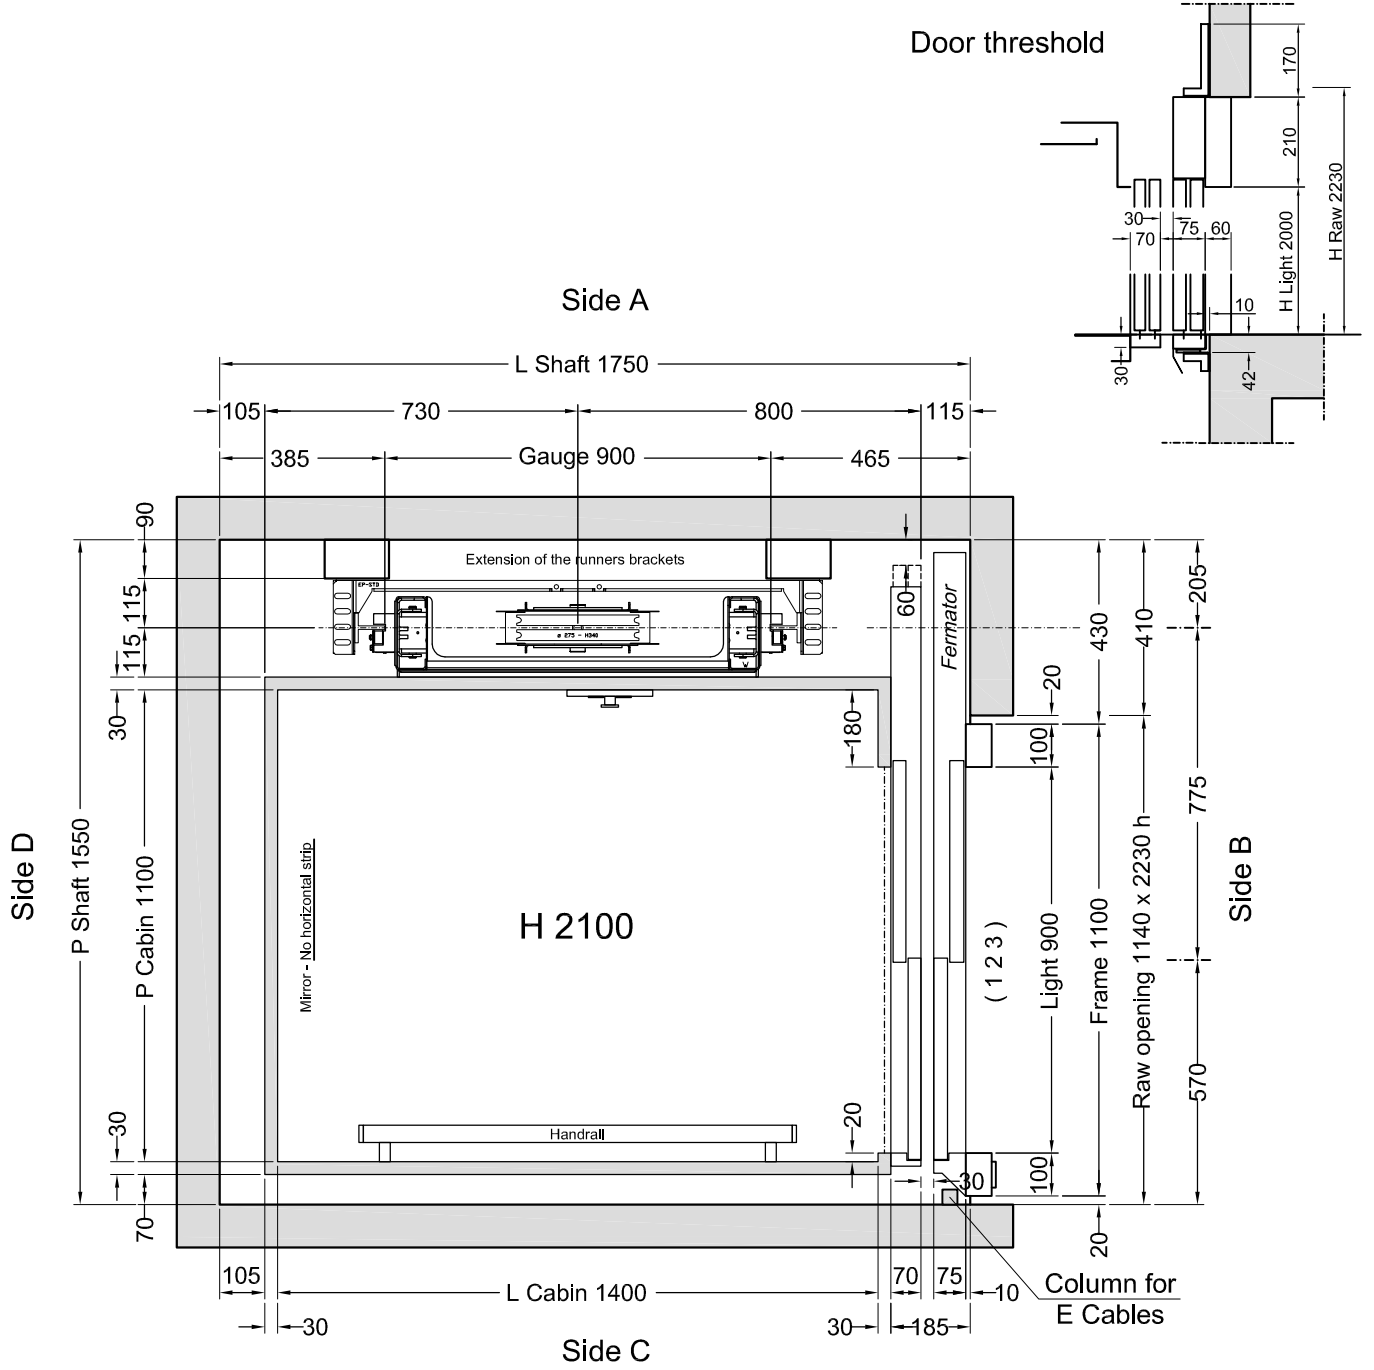


Stops: 3 - Doors: 3

Shaft in **Masonry (Muratura)**

ACCESSORI:

- Chiave abilitazione pulsantiera cabina a doppia estrazione
- Guide in barre da 2,5 m
- Pompa a mano
- Pressostato con segnalazione di sovraccarico
- Due velocità
- Ritorno piano basso con tempo regolabile
- Telefono a cura Lift Shop
- Fotocellula tutta parete V2
- Manovra Automatica 2011
- Pulsantiera cabina con pulsante aprirporta

Pulsantiera cabina con pulsante aprirporta

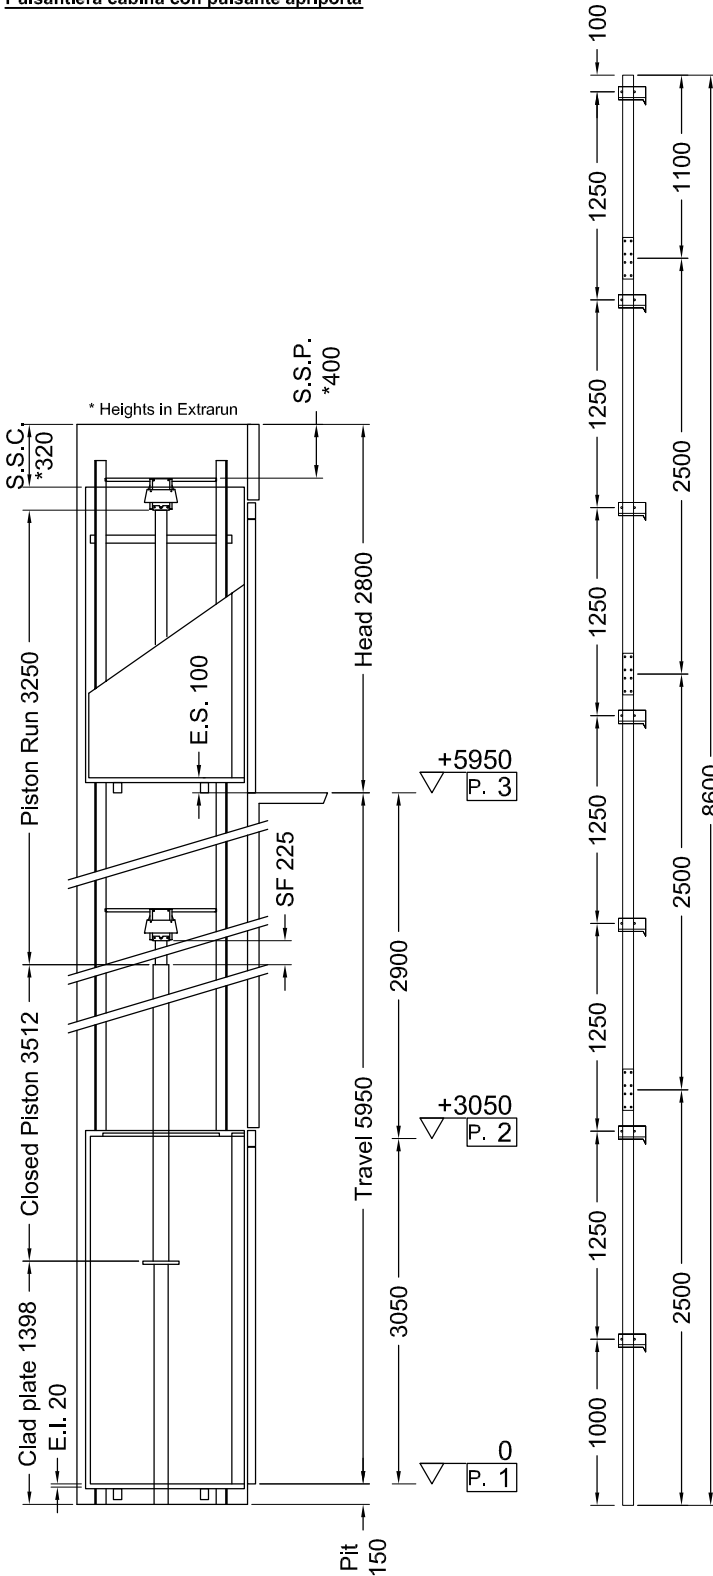

Indirect Installaton	Speed 0,3 m/s	24/04/14 16.53 (V.2844)
----------------------	---------------	-------------------------

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	13422	P	(N)	648
N	(N)	791	N	(N)	9091
F1	(N)	1699	F1	(N)	2831
F2	(N)	374	F2	(N)	623

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	43,32
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	25,47
SF.	Piston extraction (mm)	225	Overpressure limit (bar)	60,64
S.S.P.	Piston/head (mm)	400	Residual pressure (bar)	1,68
S.S.C.	Cabin/head (mm)	320		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Runners	T70-2A
Capacity (l/min)	35	Brackets	(Nr) 7
Motor (V)	MF230V	Cables	Ø 11 mm 6-(1+9+9)
Power (Kw)	2,9	Cables lenght (mm) 2 x	11000
Corrente (A)	19	Min actual breaking load (N)	70700
Piston	START Homø) 70x5x3250		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing lenght (mm)	9000		
Min hydraulic oil (L)	47		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	FERMATOR	210/10/40	

MACHINERY LOCATION			
At floor	3	Length of the hose travel	2000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Similinox F12PPS	Mirror No Horizontal strip	Side D
Finishes	Inox Scotch Brite	Handrail	Inox S.B., Side C
Oper. panel	VERTICAL (Like finishes)		
Floor	Gomma a Bolle - Nera		
Ceiling	CLOSED - Bianco A1		
Cabin Doors	Side B: 2-Panels Automatic Sliding doors, Inox Scotch Brite		

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dlmension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Return to the lower floor after adjustable time
<u>Telephone by Lift Shop</u>
Full helght Infra-red curtain V2
Automatic Control 2011
<u>Door Open Button on C.O.P.</u>