


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
1			Standard RAL 7013*	2000	2100	RAL 7013*	Panoramic	Transparent	C2
		2 3	Standard RAL 7013*	2000	2100	RAL 7013*	Panoramic	Transparent	

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(*) Smooth finish - No raised edges

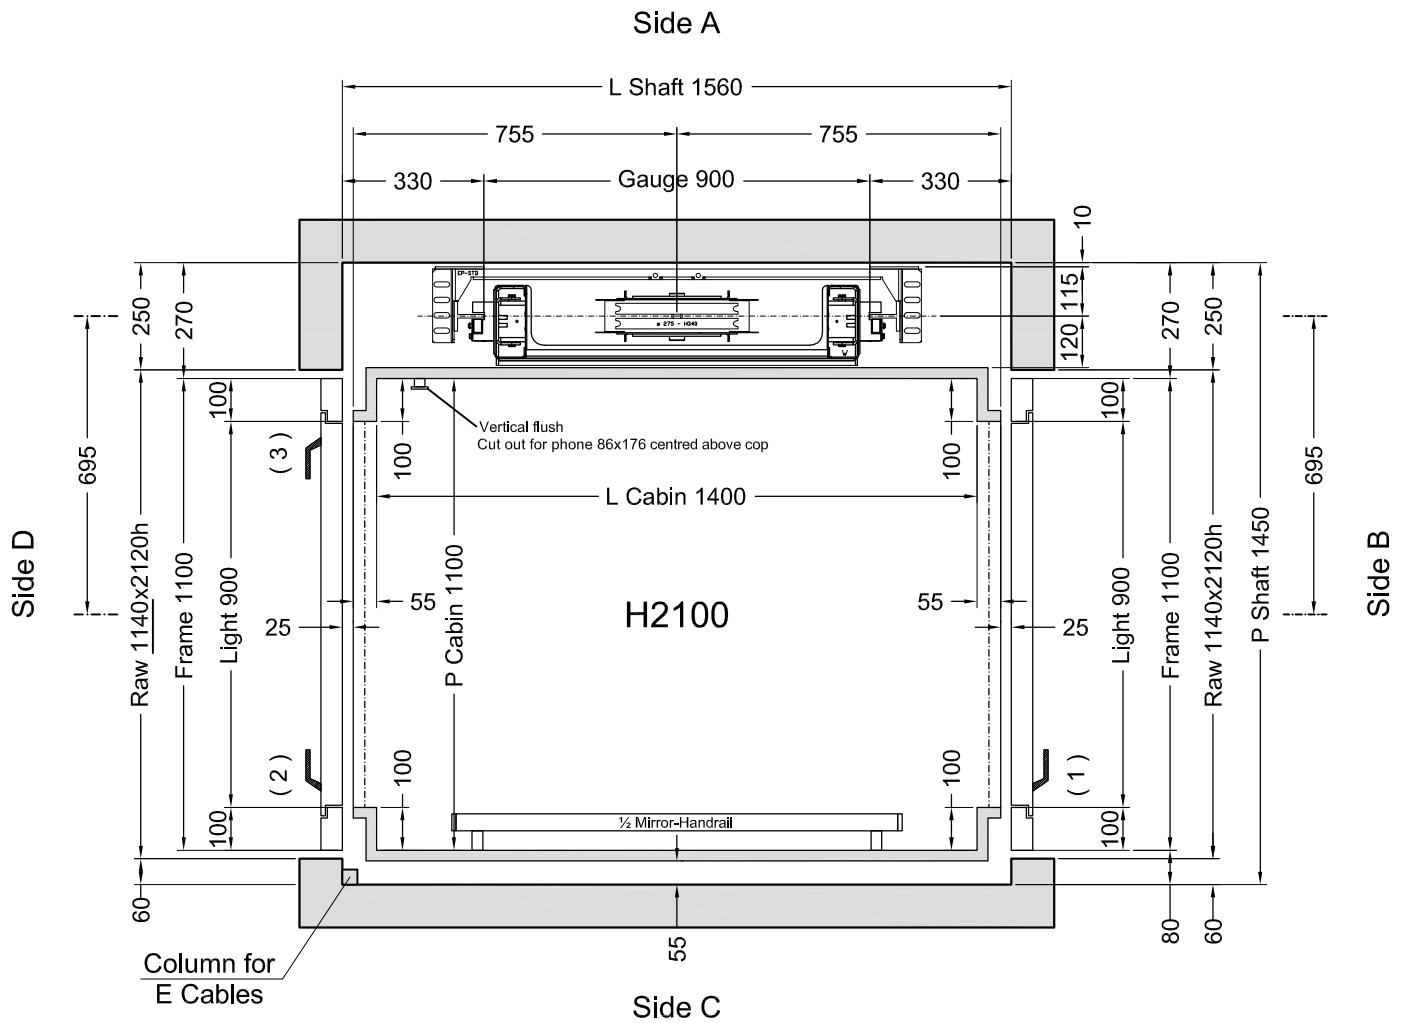


Cabina
Classica

Stops: 3 - Doors: 3

Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1450 (L) x 1100 (P)** thks **20 mm** Weight: **50 kg**

ORDER	Description	Designer	Date	Final Drawings

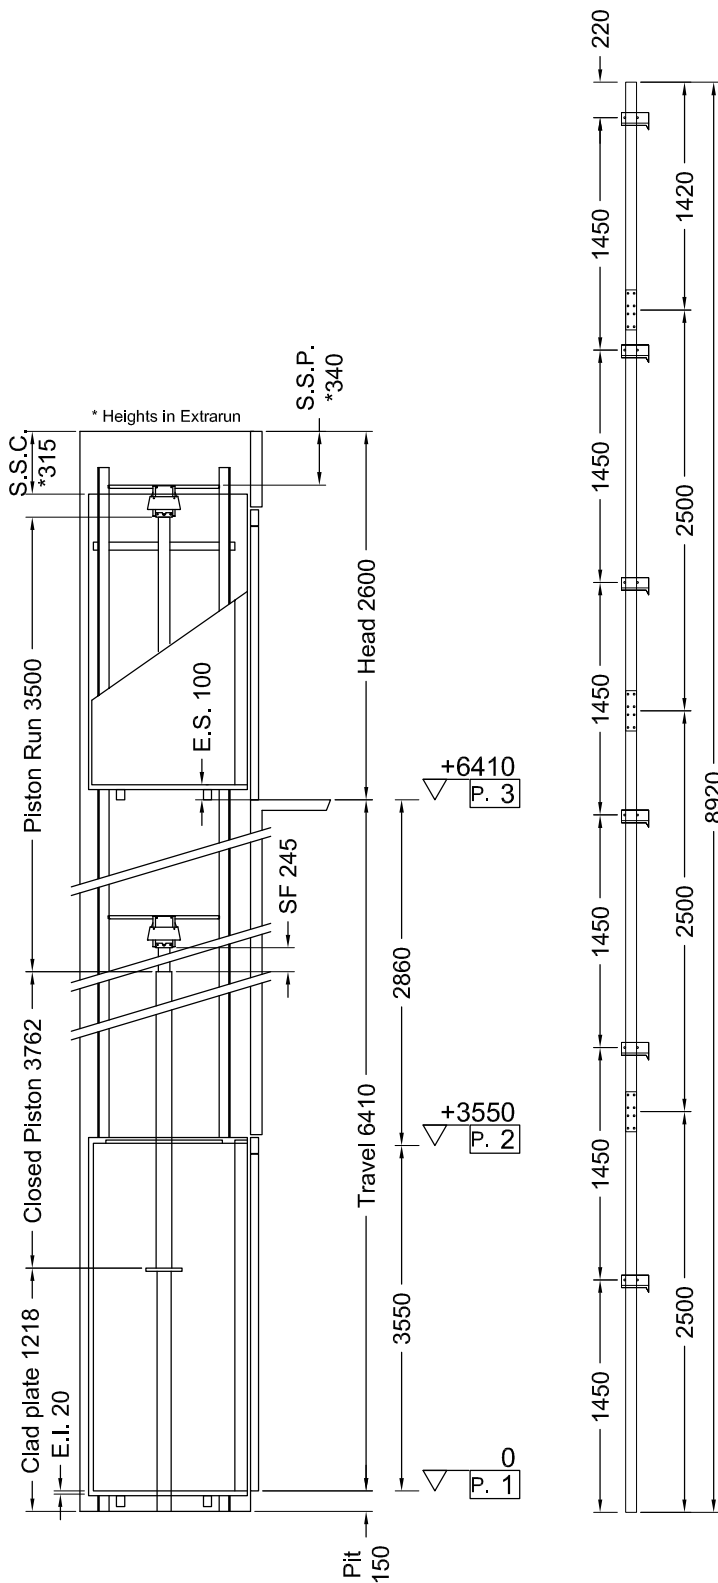

Indirect Installation Speed 0,3 m/s 22/01/16 14.55 (V.2876)

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12400	P	(N)	668
N	(N)	870	N	(N)	8469
F1	(N)	1671	F1	(N)	2785
F2	(N)	404	F2	(N)	673

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	39,75
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	21,9
SF.	Piston extraction (mm)	245	Overpressure limit (bar)	55,65
S.S.P.	Piston/head (mm)	340	Residual pressure (bar)	1,73
S.S.C.	Cabin/head (mm)	315		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)		
Capacity (l/min)	35	Guide rails	70x70x9
Motor (V)	MF230V	Brackets	(Nr) 6
Power (Kw)	2,9	Ropes	Ø 11 mm 6-(1+9+9)
Nominal current (A)	27	Cables length (mm) 2 x	12000
Piston	Start Home (ø)70x5x3500	Min actual breaking load (N)	70700
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	5000		
Min hydraulic oil (L)	47		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	1	Length of the hose travel	1000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Avorio PPS11	½ Mirror	Side C
Finishes	Avorio PPS11	Handrail	Inox S.B., Side C
Oper. panel	Vertical Flush mounted **	Outside covering	Roof
Floor	By Customer	Outside finishing	F41PPS
Ceiling	DAMA - Blanco A1		
(**) Corner A/D - Inox Scotch Brite			

OTHER ACCESSORIES
Enabling key for the cabin button pad, double insertion
Guides dimension 2.5 m
Manual pump
Manostat with overweight signal
Two speed
Handles CASPIM (SHORT)
Telephone by Lift Shop
Full height Infra-red curtain V2
Landing buttons Braille
Roof covering
Automatic Control 2011
Call Accept + Emergency manual descent from cabin
Cut out for flush phone 86 mm x 175 mm on centred above buttons