


FLOOR DOOR

| Side B | Side C | Side D | VERSION | H LIGHT | H FRAME | FRAME | WINDOW | GLASS | ACCESSORIES |
|--------|--------|--------|-----------------------|---------|---------|--------------|-----------|-------------|-------------|
| | 1 | | Standard Rust-proof * | 2000 | 2100 | Rust-proof * | Panoramic | Transparent | C2 |
| | 2 3 4 | | Standard Rust-proof * | 2000 | 2100 | Rust-proof * | Panoramic | Transparent | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad


(*) No raised edges - Doors solid with no fixing holes

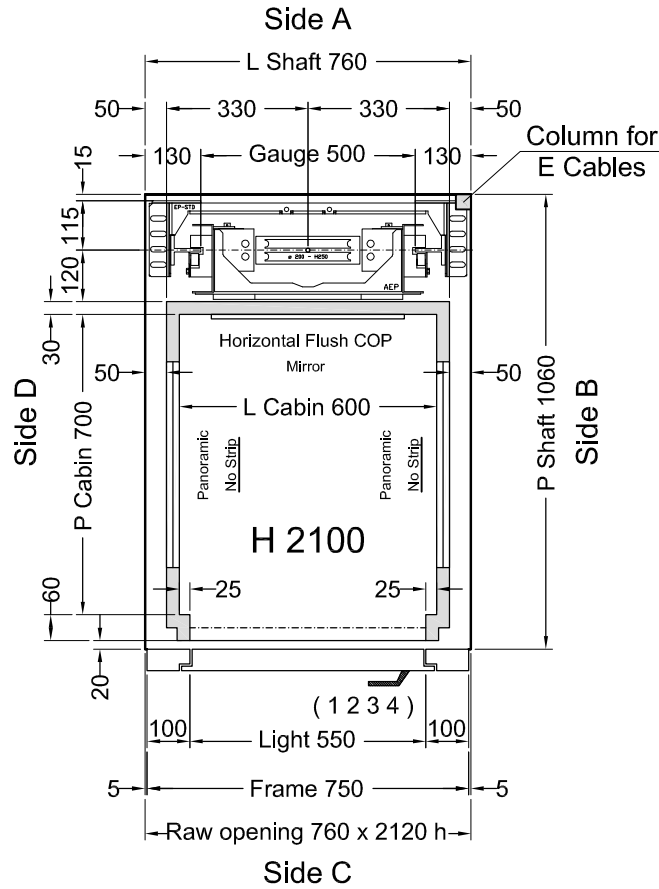

Stops: 4 - Doors: 4

Customer own flooring: Dimensions **600** (L) x **730** (P) thks **20** mm Weight: **50** kg

Shaft in **Shaft at Client expense (Struttura a carico Cliente)**

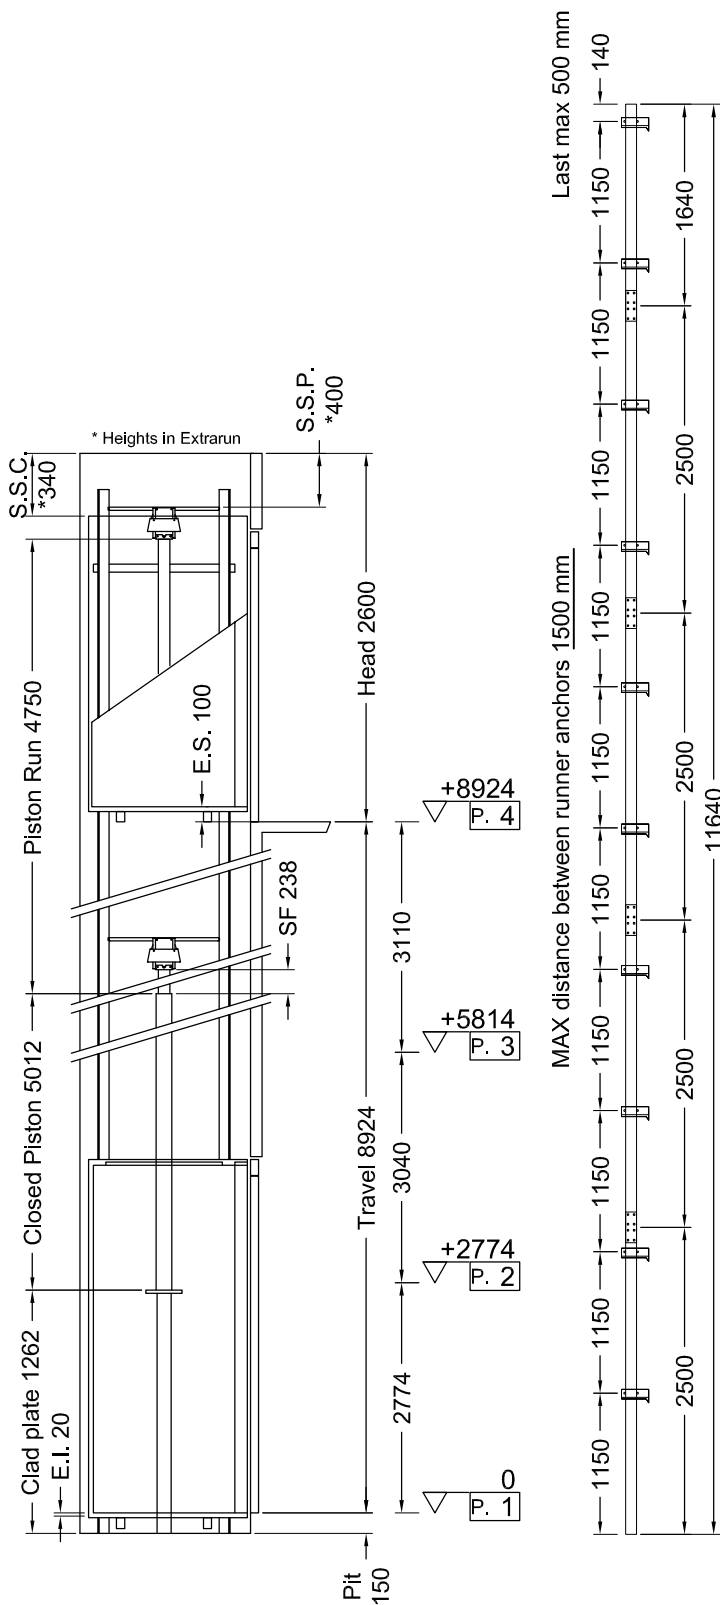

| | | | |
|--|--|---|-------------------------------------|
| Indirect Installation | | Speed 0,3 m/s | 03/12/15 11.28 (V.2852) |
| THRUST DURING NORMAL OPERATION | | THRUST OF SAFETY DEVICE INTERVENT. | |
| P | (N) 9834 | P | (N) 717 |
| N | (N) 1084 | N | (N) 6924 |
| F1 | (N) 1018 | F1 | (N) 1697 |
| F2 | (N) 149 | F2 | (N) 248 |
| SPACES | | PRESSURES | |
| E.I. | Extrarun below cabin (mm) 20 | Max static pressure | (bar) 32,62 |
| E.S. | Extrarun above cabin (mm) 100 | Min static pressure | (bar) 17,33 |
| SF. | Piston extraction (mm) 238 | Overpressure limit | (bar) 45,67 |
| S.S.P. | Piston/head (mm) 400 | Residual pressure | (bar) 1,86 |
| S.S.C. | Cabin/head (mm) 340 | | |
| HYDRAULIC UNIT | | MECHANICAL PARTS | |
| Central unit | GMV HL 3010 (-*) | Guide rails | 70x70x9 |
| Capacity (l/min) | 35 | Brackets | (Nr) 10 |
| Motor (V) | MF230V | Ropes | \varnothing 9 mm 6-(1+9+9) |
| Power (Kw) | 2,9 | Cables length (mm) 2 x | 14000 |
| Nominal current (A) | 27 | Min actual breaking load (N) | 47300 |
| Piston | Start Home (\varnothing) 70x5x4750 | | |
| Opt. oil position | BASSO | | |
| Tubing | 3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4" | | |
| Tubing length (mm) | 6000 | | |
| Min hydraulic oil (L) | 54 | | |
| SECURITY DEVICES | Manufacturer | Model | Certificate |
| Safety Gear | PFB | BP1 | TÜV AFV515 |
| Block Valve | START ELEVATOR | 1/2" 0327 | CA50.00525 |
| Key Locks | Prudhomme | PLT/L/CPX NL 11-400-1002-125-02 | |
| MACHINERY LOCATION | | | |
| At floor | 1 | Length of the hose travel | 2000 (mm) |
| Cables enter in shaft: Side | B | | |
| CABIN | CABIN ACCESSORIES | | |
| Panels | Galvanized sheet | Mirror | Side A |
| Finishes | Painted RAL 9017 | Panoramic <u>No Strip</u> | Side B, D |
| Oper. panel | Horizontal Flush mounted ** | Outside covering | Side B, D, Roof |
| Floor | By Customer | Outside finishing | Painted RAL 9017 |
| Ceiling | SPOTS LED - Inox Scotch Brite | | |
| (**) Inox Scotch Brite | | | |
| OTHER ACCESSORIES | | | |
| Enabling key for the cabin button pad, double insertion | | | |
| Mechanic painted RAL 9017 | | | |
| Guides dimension 2.5 m | | | |
| Piston in 2 pcs | | | |
| Piston painted RAL 9017 | | | |
| Manual pump | | | |
| Manostat with overweight signal | | | |
| Two speed | | | |
| Handles CASPIM (Long) | | | |
| <u>Telephone by Lift Shop</u> | | | |
| Cabinet: Antracite N4 | | | |
| Full height infra-red curtain V2 | | | |
| <u>Roof covering</u> | | | |
| Automatic Control 2011 | | | |
| <u>Call Accept + Emergency manual descent from cabin</u> | | | |

