


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
	G 1 2		Aluminium anodized + RAL 9022 *	2000	2100	Anodized Al. + RAL 9022 *	Panoramic	Transparent	C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(*) Gloss - Smooth finish

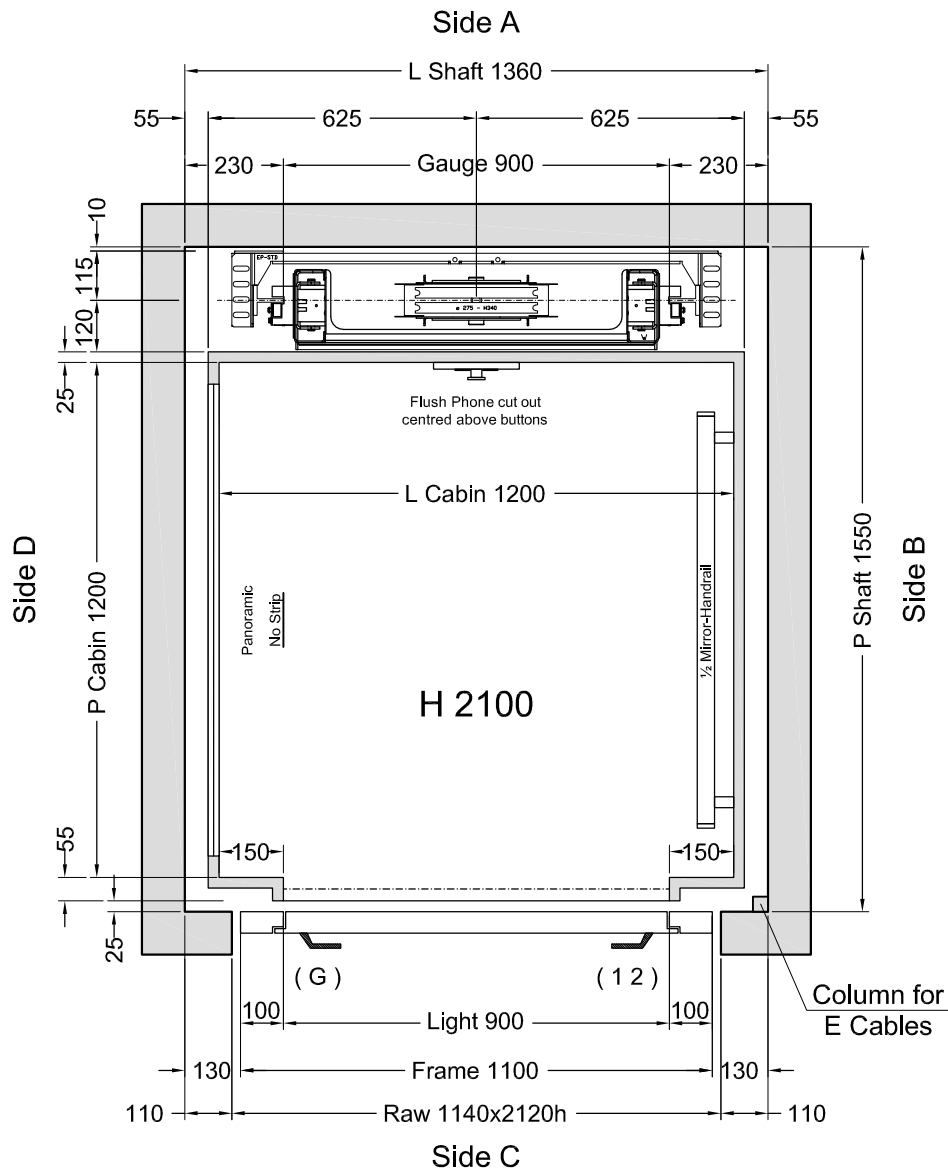

Cabina
Classica

2
1
G


Stops: 3 - Doors: 3

Shaft in **Reinforced concrete (C.A.)**


Customer own flooring: Dimensions **1200 (L) x 1225 (P)** thks **20 mm** Weight: **50 kg**

VERSIONS	Description	Designer	Date	Final Drawings	
	raw		D.Ogliastro	07/04/2016	Model ELFO
Porte.		L. Del Bianco	04/04/2016	 Elfo	SHEET DIMENS. A3
ex Aluminium; cern.p.G; test.ex2600; centr.ex7m suA; colori: finit.in&out,tetto&corrim.; ritorno al G; cut4phone;velocitàomei		L. Del Bianco	14/04/16		SCALE 1:12.5
		CAPACITY	AREA m ²	CAPACITY	
		300 kg	1,44		



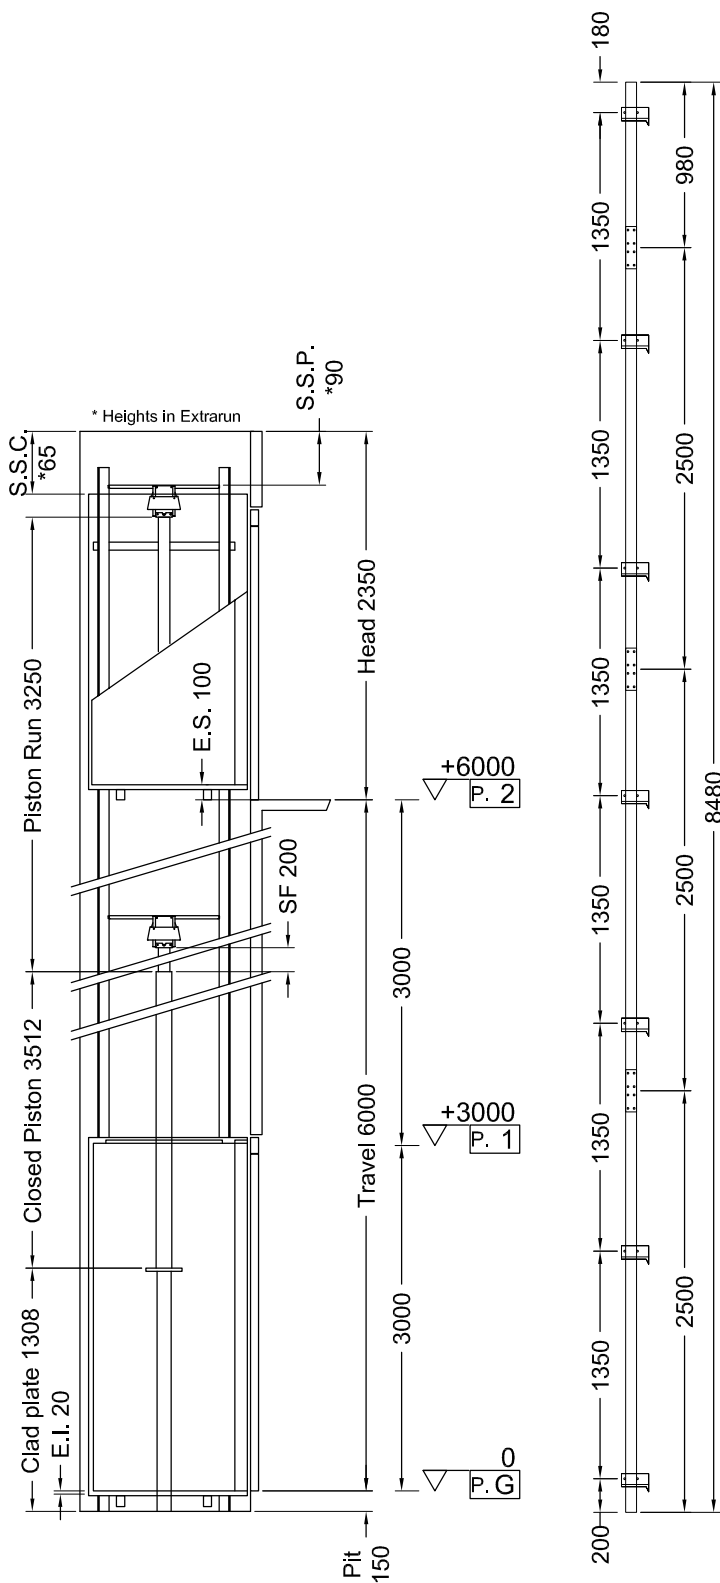

Indirect Installation		Speed 0,3 m/s	14/04/16 09.13 (V.2876)
THRUST DURING NORMAL OPERATION		THRUST OF SAFETY DEVICE INTERVENT.	
P	(N) 12539	P	(N) 648
N	(N) 808	N	(N) 8519
F1	(N) 1836	F1	(N) 3059
F2	(N) 315	F2	(N) 525
SPACES		PRESSURES	
E.I.	Extrarun below cabin (mm) 20	Max static pressure	(bar) 38,98
E.S.	Extrarun above cabin (mm) 100	Min static pressure	(bar) 23,69
SF.	Piston extraction (mm) 200	Overpressure limit	(bar) 54,57
S.S.P.	Piston/head (mm) 90	Residual pressure	(bar) 1,68
S.S.C.	Cabin/head (mm) 65		
HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Guide rails	70x70x9
Capacity (l/min)	35	Brackets	(Nr) 7
Motor (V)	MF230V	Ropes	\varnothing 11 mm 6-(1+9+9)
Power (Kw)	2,9	Cables length (mm) 2 x	11000
Nominal current (A)	27	Min actual breaking load (N)	70700
Piston	Start Home (\varnothing) 70x5x3250		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"		
Tubing length (mm)	7000		
Min hydraulic oil (L)	47		
SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	START ELEVATOR	1/2" 0327	CA50.00525
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	
MACHINERY LOCATION			
At floor	G	Length of the hose travel	2000 (mm)
Cables enter in shaft: Side	B		
CABIN	CABIN ACCESSORIES		
Panels	Similinox F12PPS	1/2 Mirror	Side B
Finishes	F41PPS	Panoramic	Side D - No Strip
Oper. panel	VERTICAL (Like finishes)	Handrail	Inox S.B., Side B
Floor	By Customer	Outside covering	Side C, D, Roof
Ceiling	SPOTS LED - Blanco A32PP	Outside finishing	F41PPS
OTHER ACCESSORIES			
Enabling key for the cabin button pad, double insertion			
Guides dimension 2.5 m			
Manual pump			
Manostat with overweight signal			
<u>Two speed</u>			
Return to the lower floor after adjustable time			
False head device			
Handles CASPIM (Long)			
Telephone by Lift Shop			
Full height Infra-red curtain V2			
<u>Roof covering</u>			
Automatic Control 2011			
Cabin Buttons: "G, 1, 2" - Blue Buttons			
<u>Call Accept + Emergency manual descent from cabin</u>			
<u>Cut out for flush phone 86 mm x 175 mm on centred above buttons</u>			



Final Drawings L. Del Bianco	1° STESURA 14/04/16
Final Drawings	
SCALE OUT OF SCALE	SHEET 2/2