


FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
B			Aluminium Anodized	2000	2100	Anodized aluminium	Panoramic	Etched Neutral	C2
G 1			Standard Galvanized + RAL 9003*	2000	2100	Galvanized and RAL 9003*	Absent		C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

(*) Semi-Polished - Smooth finish - No raised edges

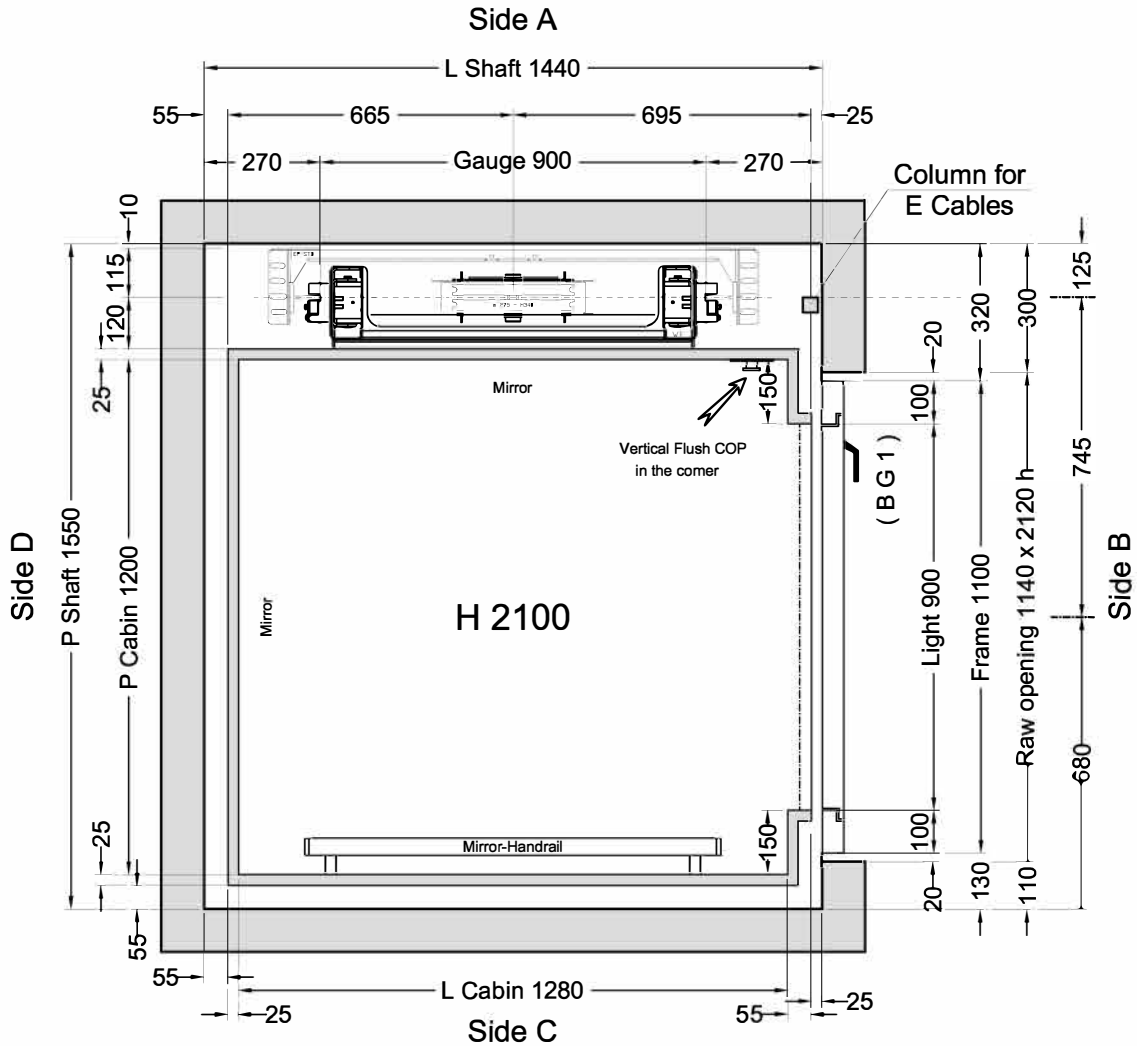

Cabina
Classica




Stops: 3 - Doors: 3

Shaft in **Masonry (Muratura)**

Customer own flooring: Dimensions **1305 (L) x 1200 (P)** thks **20 mm** Weight: **50 kg**

ORDER	DESCRIPTION	DESIGNER	DATE	Final Drawings	
ORDER NUMBER	VERSIONS			Model	SHEET
PS2378				ELFO	1/2
		D.Ogliastro	19/07/2016		SHEET DIMENS.
		Final Drawings L. Del Bianco	1° STESURA 21/07/16		A3
			CAPACITY	AREA m²	CAPACITY
		350 kg	1,54		1:12.5

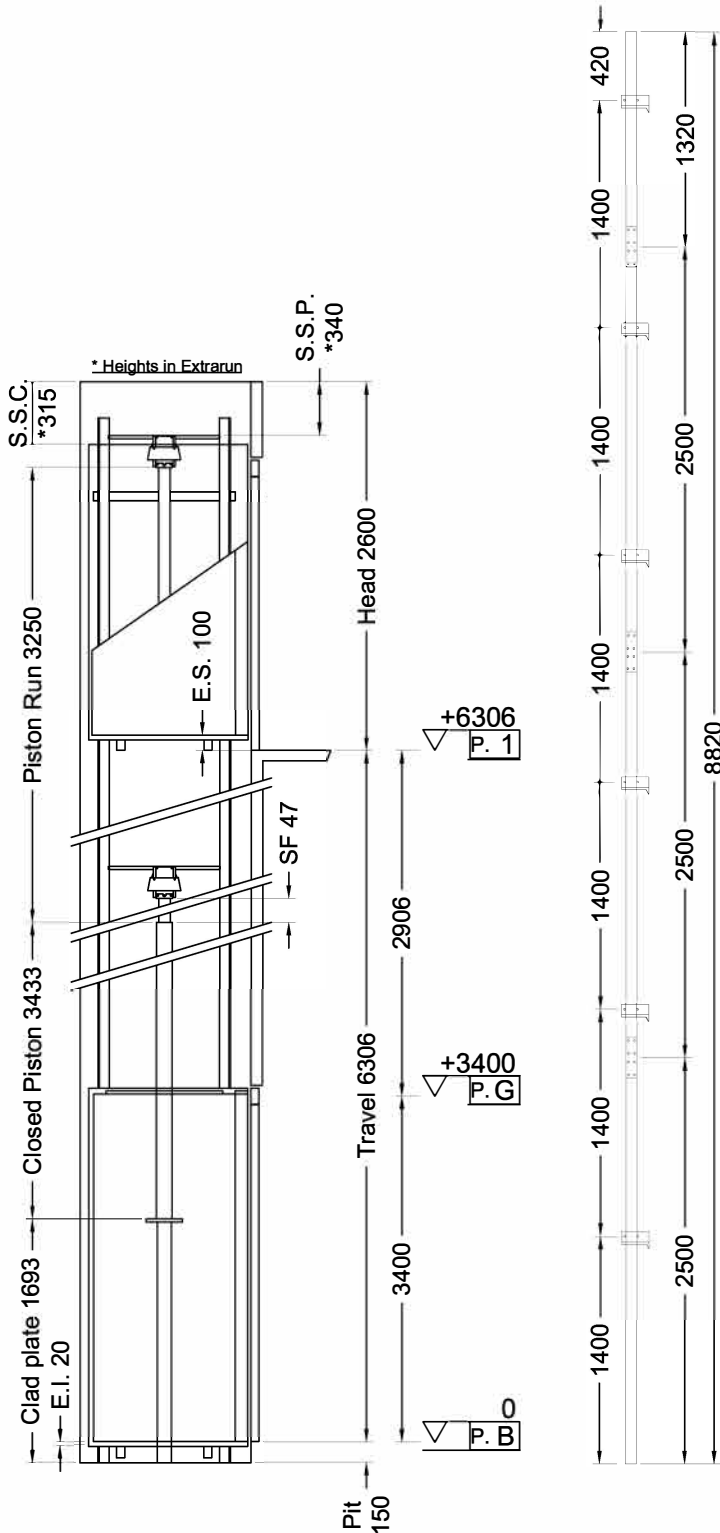

Indirect Installation Speed 0,3 m/s 21/07/16 14.20 (V.2910) ^{62D}

THRUST DURING NORMAL OPERATION				THRUST OF SAFETY DEVICE INTERVENT.			
P	(N)	13573		P	(N)	648	
N	(N)	860		N	(N)	9260	
F1	(N)	2050		F1	(N)	3417	
F2	(N)	381		F2	(N)	635	

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	43,84
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	25,99
SF.	Piston extraction (mm)	47	Overpressure limit (bar)	61,37
S.S.P.	Piston/head (mm)	340	Residual pressure (bar)	1,68
S.S.C.	Cabin/head (mm)	315		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Guide rails	70x70x9
Capacity (l/min)	35	Brackets	(Nr) 6
Motor (V)	MF230V	Ropes	\varnothing 11 mm 6-(1+9+9)
Power (Kw)	3,4	Cables length (mm) 2 x	12000
Nominal current (A)	32	Min actual breaking load (N)	70700
Piston	OMARLIFT HC (\varnothing)70x5x3250		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - FD M30X2		
Tubing length (mm)	5000		
Min hydraulic oil (L)	47		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	OMARLIFT	HC-34	TÜV 44 208 07 352266 004
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	B	Length of the hose travel	1000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Galvanized sheet	Mirror	Side A, C, D
Finishes	Inox BA mecc.	Handrail	Inox Lucido, Side C
Oper. panel	Vertical Flush mounted **	Outside covering	Roof
Floor	By Customer	Outside finishing	F41PPS
Ceiling	UNIVERSAL - Inox BA mecc.		
(**) Corner A/D - Inox BA mecc.			

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
 - Guides dimension 2.5 m
 - Manual pump
 - Manostat with overweight signal
 - Two speed**
 - Handles CASPIM (Long)
 - Telephone by Lift Shop
 - Cabinet: F41PPS
 - Full height infra-red curtain V2
 - Car Operating Panel not Side A
 - Roof covering
 - Automatic Control 2011
 - Call Accept + Emergency manual descent from cabin
 - Blue Buttons - Cabin Buttons: "B, G, 1"

