

FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
	G 1 2 3		Aluminium Anodized + RAL 9005 **	2000	2100	Anodized Al. + RAL 9005 **	Panoramic	Transparent	C2 - Doors Open Latch - **

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad


Shaft V52 ()

ENVIRONMENT	VERSION	Cladding	START	ROOF	ANCHORAGE
Outside	G + RAL *	Glass transparent	Pit bottom	For Outside	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Esterno	Z + RAL *	Vetro trasparente	Fondo Fossa	Per esterno	

(*) Galvanized and RAL 9005 Semi-polished - Smooth

(**) Inox Door Sill

(*) Zincata e RAL 9005 Semilucido Liscio

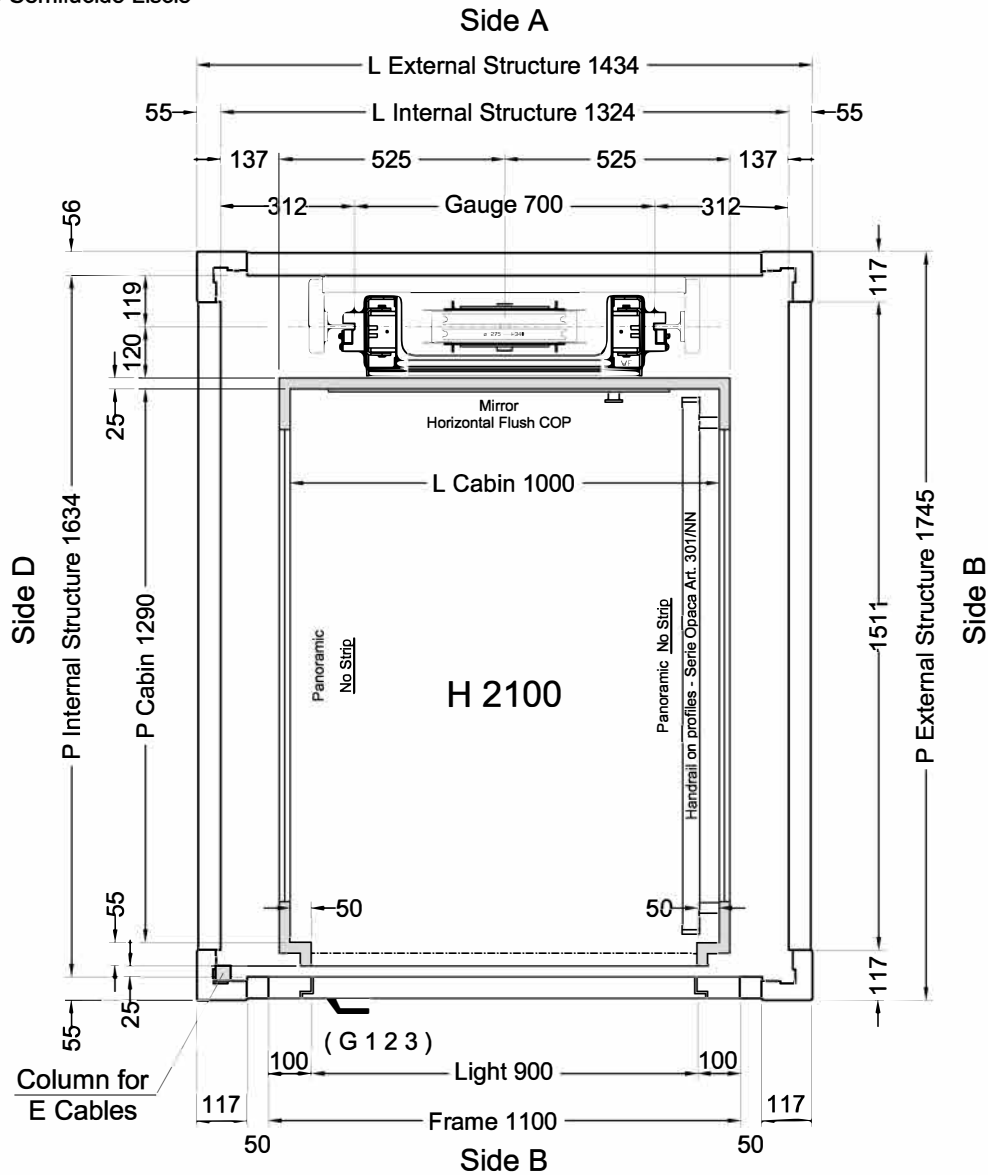

Cabina Classica




Stops: 4 - Doors: 4

Shaft in **Shaft V52 ()**

Customer own flooring: Dimensions **1000 (L) x 1315 (P)** thks **20 mm** Weight: **40 kg**

ORDER	DESCRIPTION	DESIGNER	DATE	Final Drawings	
ORDER NUMBER	VERSIONS			Model	SHEET
	Colore Soffitto.	D.Ogliastro	12/07/2016	ELFO	1/4
	porte zincate	D.Ogliastro	30/06/2016		SHEET DIMENS.
	Varie modifiche.	L. Del Bianco	22/06/2016		A3
	CLIENT	Final Drawings	1° STESURA		SCALE
	PLACE OF INSTALLATION	L. Del Bianco	15/07/16		1:12.5
	CAPACITY	AREA m²	CAPACITY		
	300 kg	1,29			

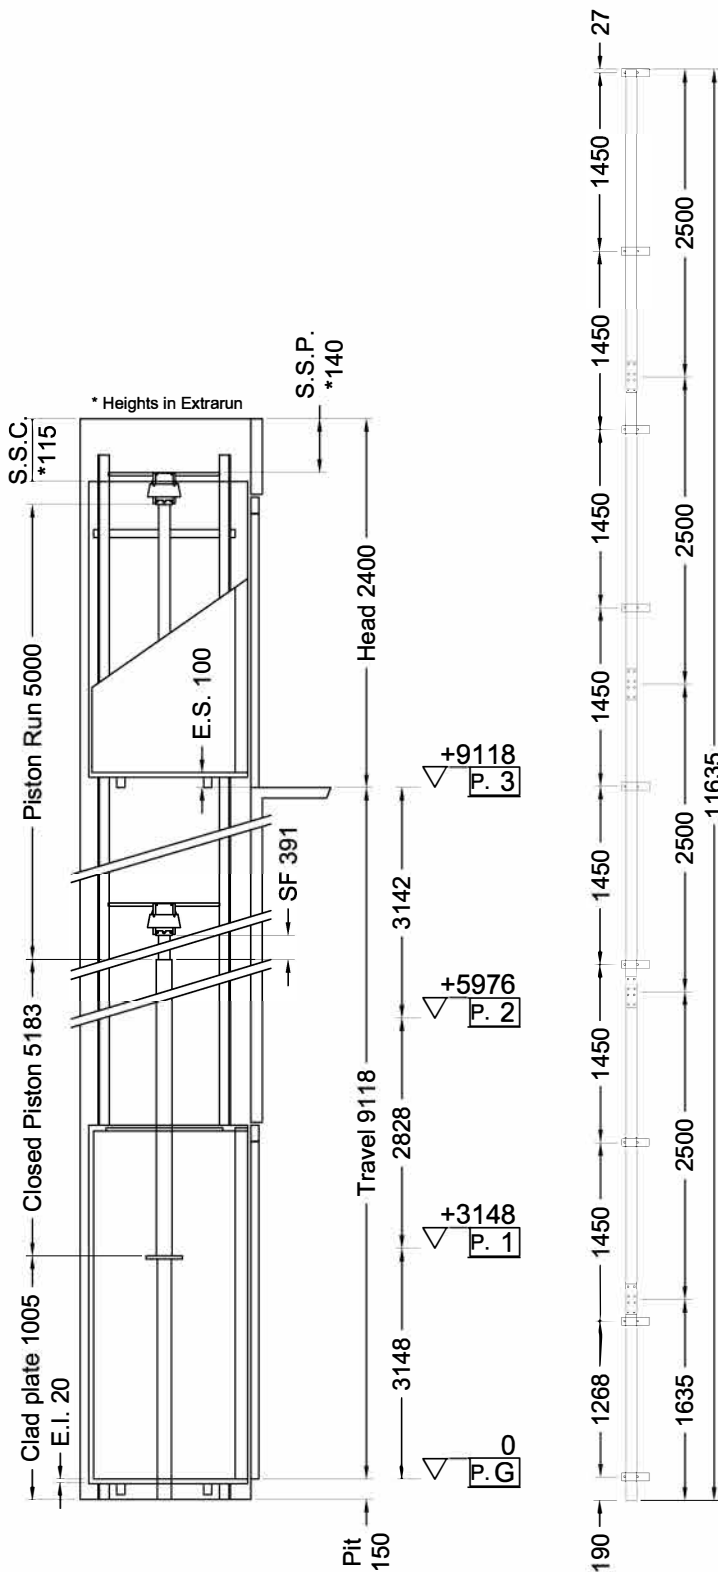

Indirect Installation Speed 0,3 m/s 15/07/16 14.56 (V.2910) ^{EN}

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	12283	P	(N)	786
N	(N)	1108	N	(N)	8511
F1	(N)	1939	F1	(N)	3231
F2	(N)	248	F2	(N)	413

SPACES		PRESSURES		
E.I.	Extrarun below cabin (mm)	20	Max static pressure (bar)	39,8
E.S.	Extrarun above cabin (mm)	100	Min static pressure (bar)	24,51
SF.	Piston extraction (mm)	391	Overpressure limit (bar)	55,72
S.S.P.	Piston/head (mm)	140	Residual pressure (bar)	2,04
S.S.C.	Cabin/head (mm)	115		


HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Guide rails	70x70x9
Capacity (l/min)	35	Brackets	(Nr) 9
Motor (V)	MF230V	Ropes	Ø 11 mm 6-(1+9+9)
Power (Kw)	2,9	Cables length (mm) 2 x	15000
Nominal current (A)	27	Min actual breaking load (N)	70700
Piston	OMARLIFT HC (ø)70x5x5000		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - FD M30X2		
Tubing length (mm)	8000		
Min hydraulic oil (L)	57		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	OMARLIFT	HC-34	TÜV 44 208 07 352266 004
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	

MACHINERY LOCATION			
At floor	G	Length of the hose travel	4000 (mm)
Cables enter in shaft: Side	A		

CABIN		CABIN ACCESSORIES	
Panels	Galvanized sheet	Mirror on profiles	Side A
Finishes	RAL 9005 Semi-polished - Smooth	Panoramic No Strip	Side B, D
Oper. panel	Horizontal Flush mounted **	Handrail	***, Side B
Floor	By Customer	Outside covering	Side B, C, D, Roof
Ceiling	SPOTS LED - Bianco A1	Outside finishing	RAL 9005 Semi-polished Smooth
	(**) Inox Scotch Brite		(***) Serie Opaca Art. 301/NN

OTHER ACCESSORIES	
Enabling key for the cabin button pad, double insertion	
Guides dimension 2.5 m	
Manual pump	
Manostat with overweight signal	
Two speed	
Return to the lower floor after adjustable time	
False head device	
Handles CASPIM (Long)	
Telephone by Lift Shop	
Full height infra-red curtain V2	
Roof covering	
Automatic Control 2011	
Call Accept + Emergency manual descent from cabin	
Blue Buttons - Cabin Buttons: "G, 1, 2, 3"	



ORDER
ORDER NUMBER

CLIENT


Final Drawings
L. Del Bianco
Final Drawings
SCALE
OUT OF SCALE
1° STESURA
15/07/16
SHEET
2/4

Shaft V52 ()

ENVIRONMENT	VERSION	Cladding	START	ROOF	ANCHORAGE
Outside	G + RAL *	Glass transparent	Pit bottom	For Outside	Anchorage to care of the Customer. Ancoraggio a cura del Committente.
Esterno	Z + RAL *	Vetro trasparente	Fondo Fossa	Per esterno	

(*) Galvanized and RAL 9005 Semi-polished - Smooth
 (*) Zincata e RAL 9005 Semilucido Liscio

Anchorage in height of 3 frames in head and every 3.5 m max

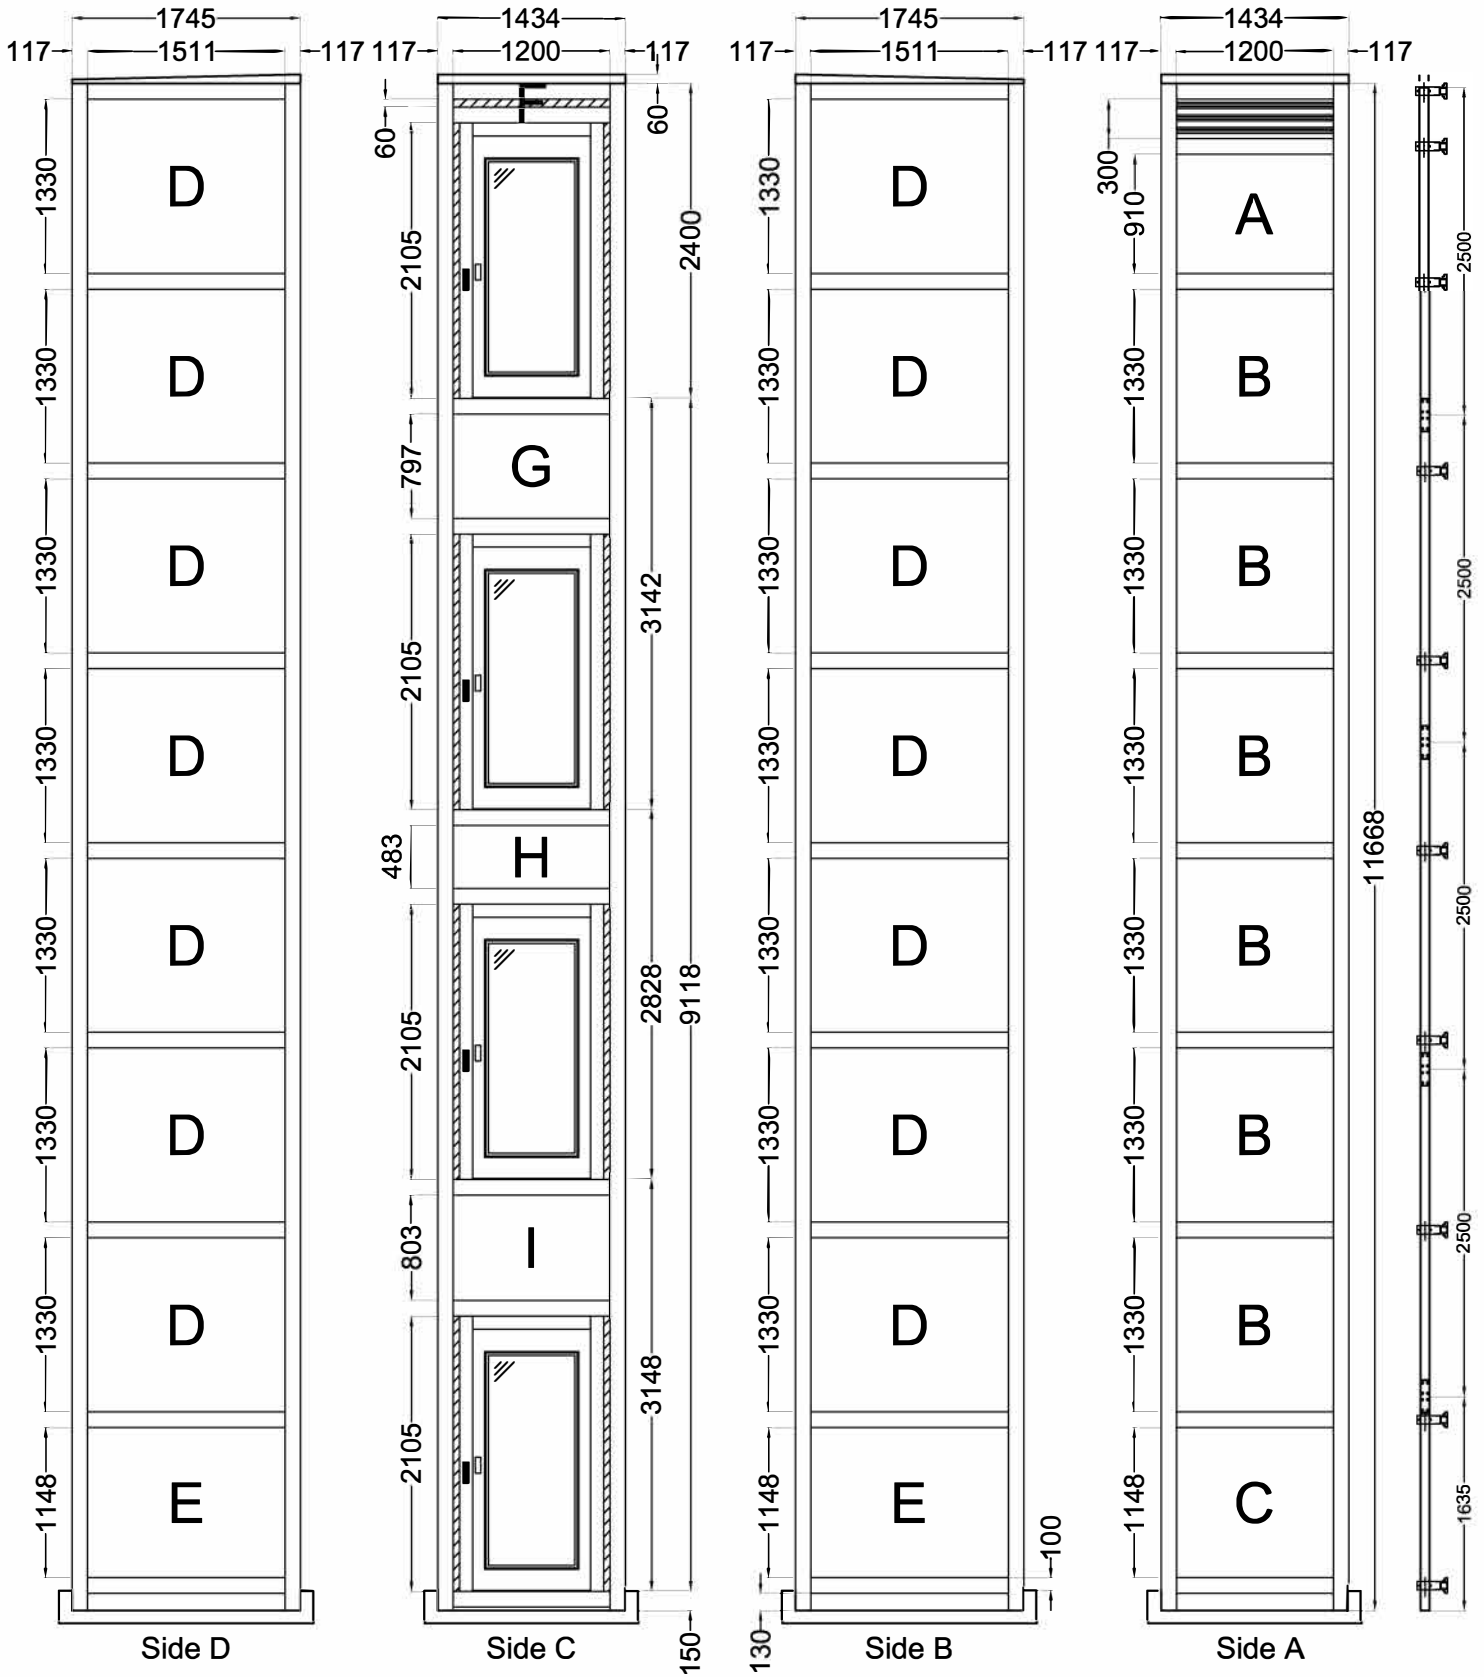

ORDER	Final Drawings	1° STESURA
ORDER NUMBER	L. Del Bianco	15/07/16
	Final Drawings	
	SCALE	SHEET 3/4

- Ventilation Grid
Galvanized + RAL 9005 Semi-polished - Smoot
- Griglia di ventilazione
Zincata + RAL 9005 Semilucido Liscio

Cladding

Tag	Q.ty	Type	Thickness	Width	Height
A	1	Glass Transparent	8/9	1220	932
B	6	Glass Transparent	8/9	1220	1352
C	1	Glass Transparent	8/9	1220	1170
D	14	Glass Transparent	10/11	1531	1352
E	2	Glass Transparent	10/11	1531	1170
F	1	Sheet Cladding		1200	60
G	1	Glass Transparent	8/9	1220	819
H	1	Glass Transparent	8/9	1220	505
I	1	Glass Transparent	8/9	1220	825



ORDER

ORDER NUMBER

Final Drawings

L. Del Bianco

Final Drawings

SCALE

OUT OF SCALE

1° STESURA

15/07/16

SHEET

4/4