


The award winning leader

Supermec SHAFT BY BUILDER • DRIVE TO RIGHT SINGLE OPENING • CUSTOM CABIN / SHAFT

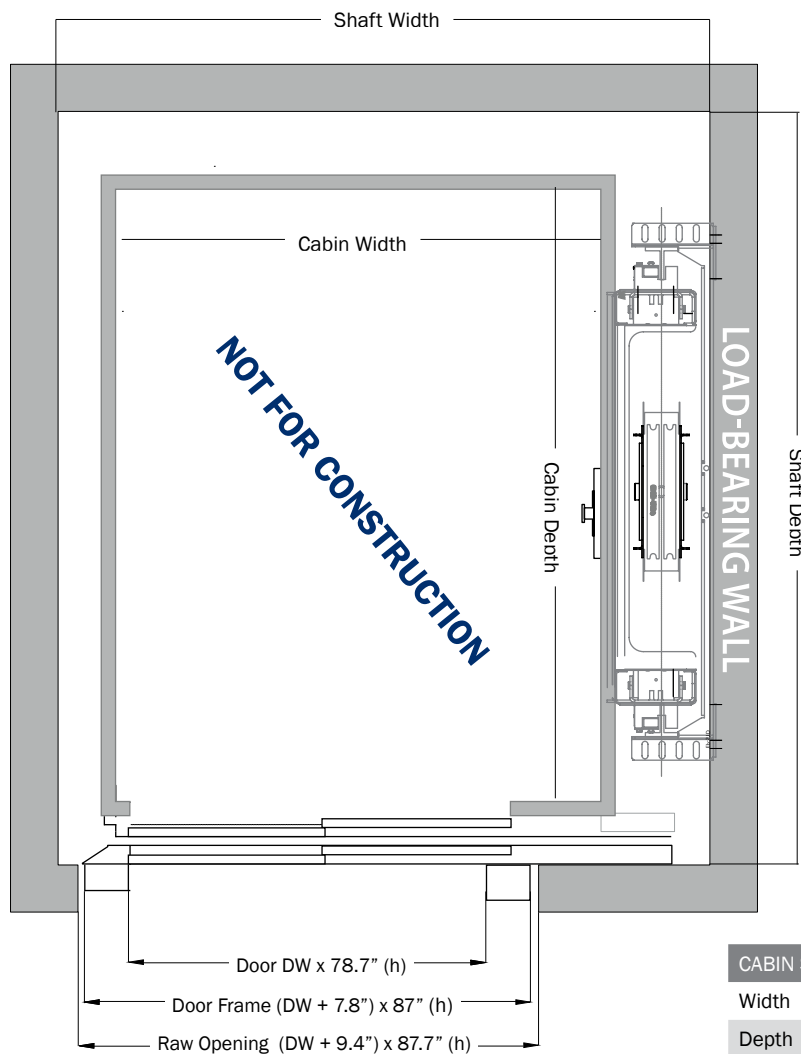

CABIN SIZE	Minimum	Maximum
Width	31.4"	47.2"
Depth	31.4"	55.1"

CABIN / SHAFT SIZING		
Cabin Width	+ 19.6"	= SW
Cabin Depth	+ 14.1"	= SD

This layout drawing is for guidance only please contact our sales and design consultants to ensure your complete understanding of your lift requirements. Please note flush car operating panels and door sizes may affect cabin / shaft dimensions.

CONSTRUCTION DETAILS

- Construction material re-inforced blockwork or equivalent
- Internal shaft size size to suit
- Pit depth 10.2" - 11.4" (depending on floor coverings)
- Headroom 110.2" - 116.1" - 119.2"
- Lift machine area up to 23' away at landing of choice
- Power supply single phase 240V 20A
- Doors sizes from 25.3" - 39.3" in 2" increments
different jambs may have alternate impact

STANDARD SPECIFICATIONS

- Person capacity 1058 - 1389lbs
- Speed 59 - 98.4fpm
- Maximum travel 39'
- Safety protection full height sensor beams
- Maximum floors 6
- Compliance Refer to your local AHJ
- Cabin fit out from our huge range of options
- Doors finishes from our huge range of options