




# A SERIES SHAFT BY BUILDER • DRIVE TO RIGHT ADJACENT THROUGH CAR • CUSTOM CABIN / SHAFT

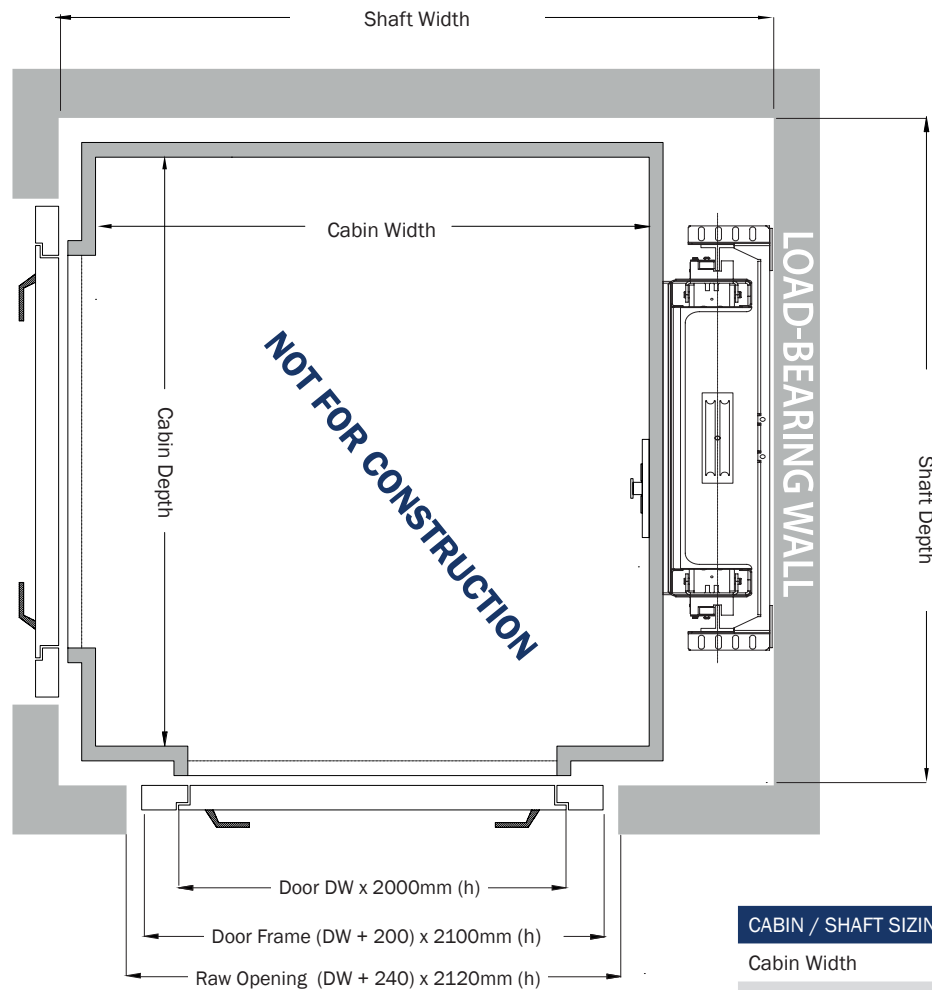

| CABIN / SHAFT SIZING |         |         |
|----------------------|---------|---------|
| Cabin Width          | + 360   | = SW    |
| Cabin Depth          | + 160   | = SD    |
| CABIN SIZE           | Minimum | Maximum |
| Width                | 600     | 1200    |
| Depth                | 600     | 1400    |

This layout drawing is for guidance only please contact our sales and design consultants to ensure your complete understanding of your lift requirements

## CONSTRUCTION DETAILS

- Construction material re-inforced blockwork or equivalent
- Internal shaft size size to suit
- Pit depth 150mm
- Headroom 2600mm (smaller is possible)
- Lift machine area up to 7m away at landing of choice
- Power supply single phase 240V 32A or 3 phase 415V 20A
- Doors sizes from 600mm - 1000mm in 50mm increments  
different jambs may have alternate impact

## STANDARD SPECIFICATIONS

- Person capacity 400kg
- Speed 0.30 m/s
- Maximum travel 15m
- Safety protection full height sensor beams
- Maximum floors 6
- Compliance AS1735.1
- Cabin fit out from our huge range of options
- Doors finishes from our huge range of options