


The award winning leader

Supermec SHAFT BY BUILDER • DRIVE TO RIGHT OPPOSITE OPENING • CUSTOM CABIN/SHAFT

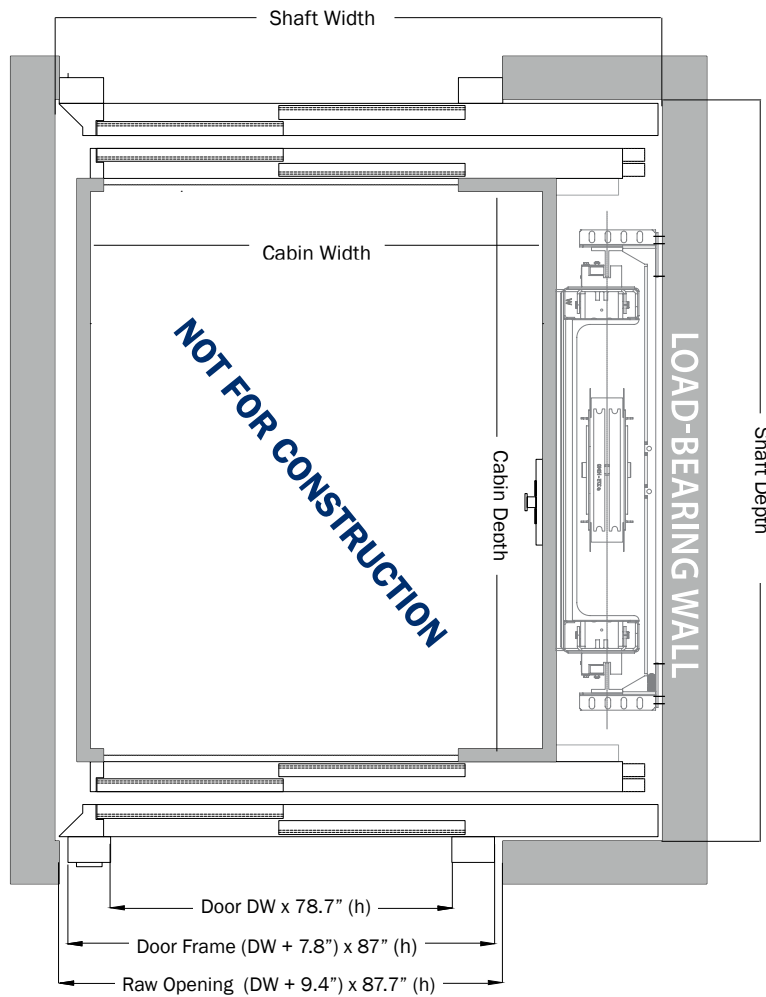

CABIN SIZE	Minimum	Maximum
Width	31.4"	47.2"
Depth	31.4"	55.1"

CABIN / SHAFT SIZING		
Cabin Width	+ 21.6"	= SW
Cabin Depth	+ 16.9"	= SD

This layout drawing is for guidance only please contact our sales and design consultants to ensure your complete understanding of your lift requirements

CONSTRUCTION DETAILS

- Construction material re-inforced blockwork or equivalent
- Internal shaft size size to suit
- Pit depth 10.2" - 11.4" (depending on floor coverings)
- Headroom 110.2" - 116.1" - 119.2"
- Lift machine area up to 23' away at landing of choice
- Power supply single phase 240V 20A
- Doors sizes from 25.3" - 39.3" in 2" increments
different jambs may have alternate impact

STANDARD SPECIFICATIONS

- Person capacity 1058 - 1389lbs
- Speed 59 - 98.4fpm
- Maximum travel 39'
- Safety protection full height sensor beams
- Maximum floors 6
- Compliance Refer to your local AHJ
- Cabin fit out from our huge range of options
- Doors finishes from our huge range of options